

EMC Test Equipment Catalog



- Electrostatic Discharge Simulator
- Impulse Noise Simulator
- Fast Transient / Burst Simulator
- Lightning Surge Simulator
- Voltage Dip & Swell Simulator
- Damped Oscillatory Wave Simulator
- Emission Measurement System
- Broadband Sleeve Antenna
- TEM Horn Antenna
- EMC Test Systems for Automotive Electronics

|2|0|2|3|-|2|0|2|4|

www.noiseken.com

Mission statement from NoiseKen


"To challenge the reproduction of electrical noise continuously and aim to be a company that makes customer EMC tests easier."

Our company was founded in 1975, when the term "EMC" began to be used as the phenomenon of malfunctions became a social problem with the spread of computers, as "a company that manufactures noise testers for reproducing malfunctions of electronic devices."


Since then, in order to contribute to the quality of products that customers make, we have provided EMC testers reproducing (output / measure) electrical noise such as electrostatic discharge phenomenon, high current phenomenon at the time of lightning strike, transient phenomenon in car, contracted EMC test services (contracted test site "Test Lab Funabashi"), and provided technical materials such as "NoiseKen News" (former Technical Report) and "Test Method Guidebook". Our brand "NoiseKen" has been adopted by more than 5,000 customers in Japan.

Based on the history and achievements so far, in addition to "continuing to challenge the reproduction of electrical noise" which is the starting point of our founding, we will continue to improve not only quality, cost and delivery time, but also automation and simulation function of our testers / measuring instruments. "NoiseKen" contributes to EMC and noise countermeasures by aiming to be a "company that makes customer's EMC tests easier" while responding to changes in the way of life.

Variety of Electrical Noises and EMC

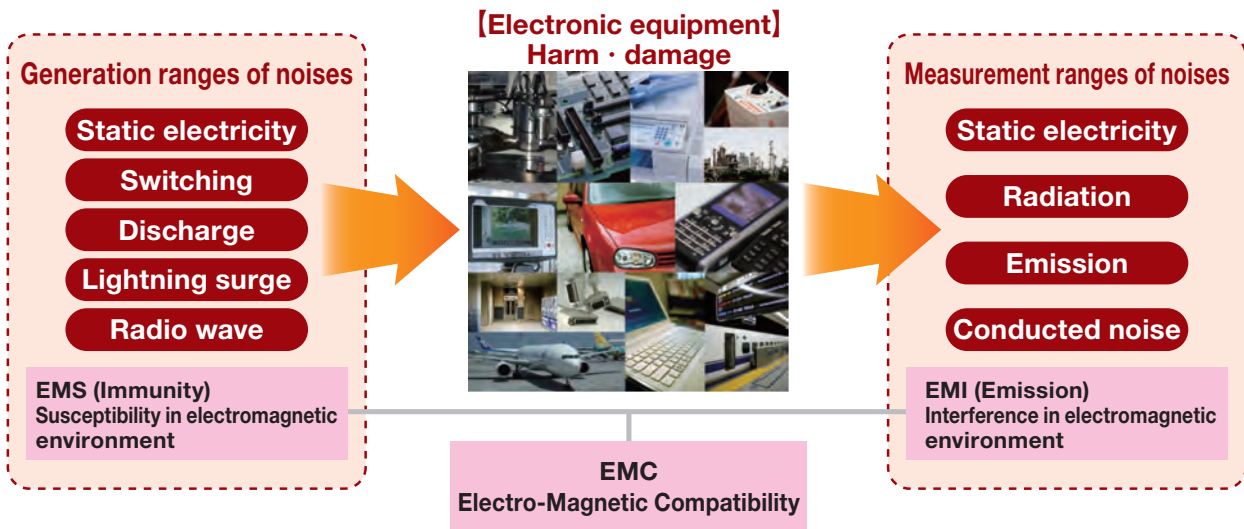

Products & Services of "NoiseKen"

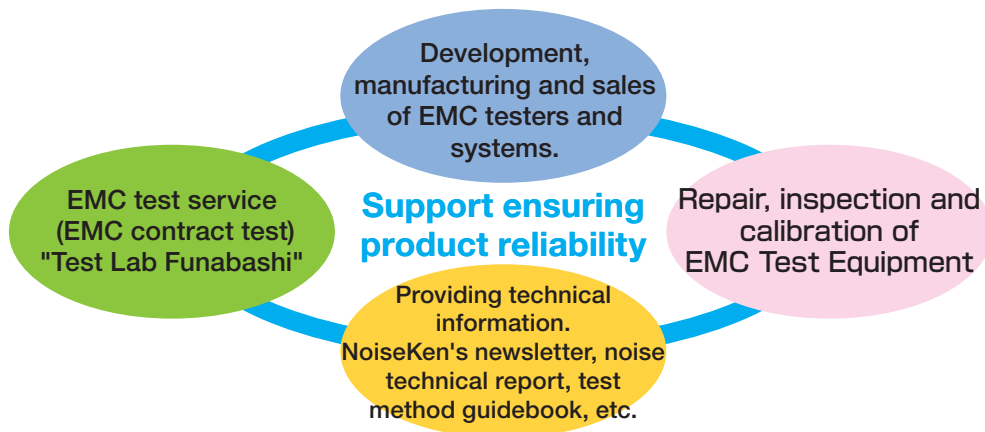

Historical Highlights of Noise Laboratory Co., Ltd.

- 1975 Adachi Noise Laboratory Co., Ltd. establishment / Location of the Head Office : Iguchi, Mitaka-shi, Tokyo
- 1976 Company name was changed to Noise Laboratory Co., Ltd.
- 1984 Head Office was relocated to Noborito, Tama-ku, Kawasaki-shi.
- 1990 Head Office was relocated to Kami-asao, Asao-ku, Kawasaki-shi.
- 1995 Start contract testing and measurement services in Funabashi, Chiba Pref.
Selected as "New business model company" by Kanto Trade & Industry Bureau.
- 1996 Head Office was relocated to Mampukuji, Asao-ku, Kawasaki City,
[Commercialization of "electromagnetic wave interference source exploration device \(ESV system\)" through industry-academia collaboration with Industrial Technology Center of Tochigi prefecture.](#)
- 1997 Equipped an anechoic chamber in Test Laboratory Funabashi
- 2000 Head Office and Kakio Work were relocated to Chiyoda, Sagamihara City.
- 2004 Acquired IEC17025 accreditation.
- 2009 Acquired test site certification in ISO/IEC17025 to Test Laboratory Funabashi by VLAC.
- 2011 China after-sales service office was established.
- 2012 [Launched Space-electric/magnetic visualization systems \(EPS-02 series\) in collaboration with Kanazawa University](#)
- 2015 [Launched thin-plate broad band antenna in partnership with Toyota Motor Corp](#)
- 2016 The 32rd Kanagawa Industrial Technology Development Grand Prize incentive-awarded to NKU07M32G Broadband Sleeve Antenna
- 2018 Received "IEC 1906 Award" from IEC (International Electrotechnical Commission)
- 2019 Received the "Excellent paper award" from Environmental Electromagnetic Engineering Study Group, the Institute of Electronics, Information and Communication Engineers.
- 2020 [Commercialization of "TEM horn antenna" through industry-academia collaboration with the National Institute of Information and Communications Technology \(NICT\)](#)
Completion of new building (office building) due to business expansion.

Outline of Noise Laboratory Co., Ltd.

[Company name]	NOISE LABORATORY CO., LTD.
[Location]	Head office : 1-4-4 Chiyoda, Chuo-ku, Sagamihara City, Kanagawa Pref. 252-0237 Japan TEL : +81-42-712-2051 FAX: +81-042-712-2050
[Establishment]	28th March, 1975
[Representative Director]	Junichi Fujigaki
[Accounting period]	May
[Dealings banks]	Mizuho bank Machida Branch Bank of Yokohama Sagamihara Ekimae Branch Bank of Mitsubishi UFJ Sagamihara Branch Sumitomo Mitsui Banking Corporation Machida Branch

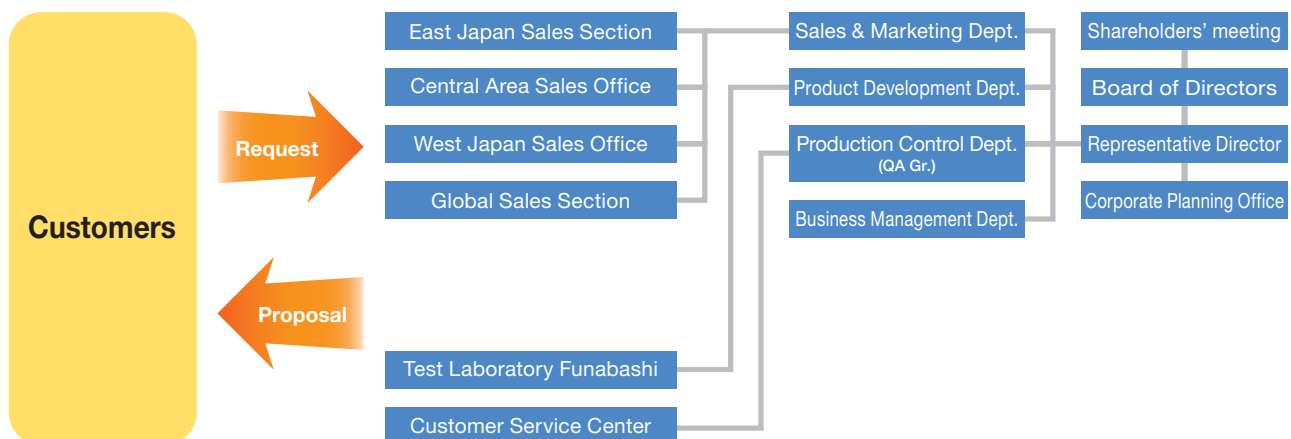


Table of Contents

	■ About Noise Laboratory Co., Ltd.	2
	■ Table of Contents	4
ESD simulator	1 Electrostatic Discharge Simulator	
ESS	ESS-S3011A & GT-30RA Electrostatic Discharge Simulator	5
	ESS-B3011A & GT-30RA Electrostatic Discharge Simulator	9
Noise Simulator	ESS-801 / ESS-801GL Test environment (Table-top type / Floor-standing type)	10
INS	IEC61000-4-2 Ed.2 Test Standard Overview	16
	ISO 10605 Ed.2 Test Standard Overview	19
EFT/B FNS	2 Noise Impulse Simulator	
	INS-S220 / S420	24
	IJ-AT450 Automatic CDN for Impulse Noise Simulator	27
	Impulse Noise Test Overview	36
Lightning Surge	3 Fast Transient / Burst Simulator	
LSS	FNS-AX4 A20 / B63 Fast Transient / Burst Simulator	38
	Fast Transient / Burst Simulator CDN Unit (DC600V 200A)	47
	IEC61000-4-4 Ed.3 Test Standard Overview	48
Voltage variation	4 Lightning Surge Simulator	
VDS	LSS-6330A series Lightning Surge Simulator	53
	LSS-F03 series Lightning Surge Simulator	59
	IEC61000-4-5 Ed.3 Test Standard Overview	66
	Lightning Surge Simulator CDN UNIT (AC600V / 300A); DC power supply CDN (DC500V 60A)	72
	Lightning Surge Simulator (AC500V/200A DC600V/200A)	73
	LSS-720B (JEC Standard)	74
	JEC Standard Overview	75
Damped Oscillatory Wave SWCS	5 Voltage Dip & Swell Simulator	
	VDS-2002	76
	IEC61000-4-11 Ed.2 Test Standard Overview	79
EMI Measure	6 Damped Oscillatory Wave Simulator	
EPS	SWCS-931D	82
RF Immunity Test System	7 Emission Measurement System	
	EPS-02Ev3 Electromagnetic Field Visualization System	83
	EPS-02EMFv2 / EPS-02Hv2 Spatial Magnetic Field Visualization System	89
	EPS-02Sv2 Sound source visualization system "KANON"	92
EMC Test Systems for Automotive Electronics	8 RF Test System	
	NKU07M32G/NKU2460G Broadband Sleeve Antenna	93
	THA-380M60G / THA-380M70 TEM Horn Antenna	97
	Simplified Radiated Immunity Test System	104
Other	9 EMC Test Systems for Automotive Electronics	
	ISO Standard Compliant Automotive Transient Surge Simulator ISS-7600 series	105
	JASO Standard Compliant Automotive Transient Surge Simulator JSS-001	112
	FORD Standard Transient Pulse Generator ISS-T1321	113
	DC Power Supply Voltage Fluctuation Simulators SG-7040 System	117

ESD Simulator

ESS-S3011A & GT-30RA

Free you from the hassle of testing by the pre-check function and the weight reduction of the discharge gun

EMC test equipment to evaluate the resistibility of electronic equipment when energy charged on a human body or object is discharged to the electronic equipment. This can be available for evaluating malfunctions or functions declines of electronic equipment against the ESD. Programmable simulator to ease some complicated tests. The output voltage is up to 30kV allowing to perform testing compliant to IEC61000-4-2 & ISO 10605 Standards.

- "3 pre-checking function" to ensure more reliable testing
- "CR constant indicator" to prevent incorrect unit attachment
- One-touch exchange of gun head and CR unit realized
- "Ten-key & Rotary knob" to ease the setting.
- "Infra-red Remote Controller" allowing setting remotely from the generator (Option)
- "Discharge Detecting Function" to realize the air-discharge confirmation
- "Lightest discharge gun in the market" to lighten the continuous operation (Excluding the cable and connector)
- "White LED Irradiator" to facilitate the visualization of the discharging areas
- "Control Software" to enable the test result reporting and control with PC



*Probe stand for the discharge gun is an option.

* The software is available for a free of charge download from our web-site. (The connection cable is necessary in addition).

* C (Capacitor) and R (Resistor) for the discharge gun is one-body unit.

* ISO 10605 compliant test can be realized with the optional parts in addition.

Feature

Achieve more reliable test! Equipped with "3 Pre-check Functions"

The new ESD simulator is equipped with 3 pre-check functions; "high voltage power output check", "insulation failure check", and "discharge relay operation check" on the main body and discharge gun. You can prevent troubles such as failing to perform the test properly; if you did not notice the failure of the tester body or the relay inside the discharge gun has reached the end of its life.

PRE CHECK **SET UP**

STEP 1

放電ガンをガンホルダーにセットし、
(START)キーを押下してください。
Please set the ESD GUN to the gunholder,
and press [START] key.



① Set the discharge gun in the gun holder.
② Press the [START] key on the tester.

PRE CHECK **SET UP**

STEP 2

接触放電チップを(PRE CHECK)端子に接触させ、
ガントリガを引いてください。
Please set the contact discharge tip to
the (PRE CHECK) terminal,
and pull the GUN TRIGGER.



③ Bring the discharge gun into contact with
the pre-check terminal [PRE CHECK] and
pull the gun trigger.

Pre-check completed!

PRE CHECK	RESULT
[CHECK 1] ...	PASS
[CHECK 2] ...	PASS
[CHECK 3] ...	20

PRE CHECK	RESULT
[CHECK 1] ...	PASS
[CHECK 2] ...	PASS
[CHECK 3] ..	FAILED

Press any key to MAIN MENU.

In case of failure, a "FAILED" message is displayed.

[Check 1] High-voltage power output check: Check the error from the set value.

[Check 2] Insulation defect check: Checks for defective insulation withstand voltage.

When the discharge gun is placed in the attached gun holder, you can check the output of the high-voltage power supply and check for insulation defects.

[Check 3] Discharge relay operation check: Check the relay for wear.

Check the wear of the discharge relay by bringing the discharge gun into contact with the check terminal and discharging.

ESS-S3011A & GT-30RA

ESD simulator
ESS

“CR constant indicator” to make sure the correct unit attachment


The constants of the discharge resistance and discharge capacitor, which were previously disassembled and checked, are now displayed on the main unit screen. When the CR unit or discharge cup of the discharge gun is replaced, it is automatically recognized and the type of CR unit is determined. The CR unit and the discharge cup are identified separately, and if the combination complies with the standard, the conforming standard is displayed at the bottom of the main menu.



Whether the gun head corresponds to IEC or ISO ?



What values are the charge capacitor and discharge resistor ?

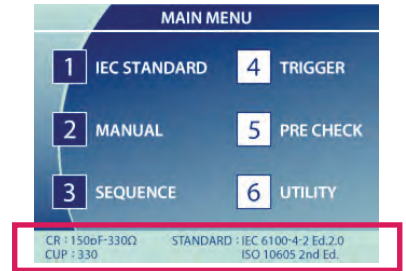

Indicated on the display of the generator

*There are restrictions on the display pattern.

CR unit [CR]	Discharge cup [CUP]	Compliant standard table
150pF-330Ω	330	IEC 61000-4-2 Ed.2, 10605 2nd Ed.
330pF-330Ω	330	ISO 10605 2nd Ed.
150pF-2kΩ	2k	ISO 10605 1st Ed. & 2nd Ed.
330pF-2kΩ	2k	ISO 10605 1st Ed. & 2nd Ed.



Easy to Check for Discharge Equipped with discharge detection function

It is possible to check the presence or absence of discharge during an air discharge test, which was difficult until now, by checking the buzzer sound from the tester and the LED display on the top of the discharge gun.

Buzzer sound of the tester

Count up the number of applications

Discharge gun LED color change

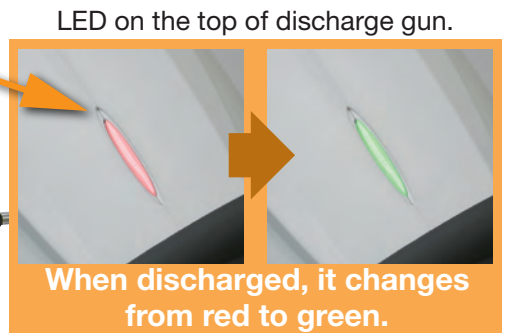

When discharged, it changes from red to green.

"Infra-red Remote Controller" available as an option to realize the setting remotely from the generator

Since you can operate the tester with the remote control without returning to the tester during the test, the test can proceed smoothly.

Start/Stop


Polarity change

Voltage Up / Down

Air/Contact discharge change

Gun trigger function
Count reset
Sequence change
F key assignment etc.

Most of the operations can be controlled by the remote controller.




ESS-S3011A & GT-30RA

The discharge gun became lighter and easier to use

The discharge gun itself has been reviewed from scratch to achieve weight reduction and the best balance of the center of gravity. The weight is lighter than previous one and the balance of the center of gravity has been improved, making it extremely easy to hold and reducing the burden on the arm during long-term tests. Please pick it up and try it.

In addition, it is now easy to confirm the performing of air discharge by the LED indicator on the top of the discharge gun, which was possible only by visual check before, making it difficult to confirm at times. Also, it is a discharge gun with a full range of functions and operations, such as easy replacement of the CR units and discharge cup, which used to take time and effort, and the installation of an "LED light" that brightly illuminates the application.

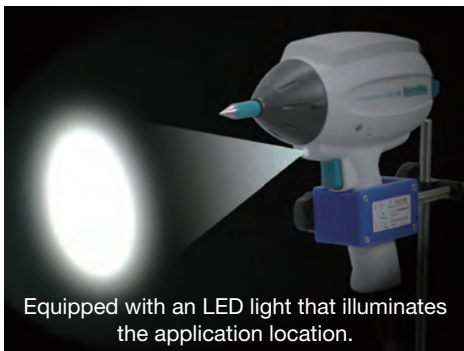

A light and easy-to-hold discharge gun!
Improved balance of the center of gravity and weight reduction of over 20%



Light and soft!
High voltage cable and ground return cable.



One-touch replacement of CR unit.



Easy to replace the discharge cup.

ISO 10605 standard compliant discharge gun package available

By adding the optional discharge cup and CR units, it performs tests that comply with the ISO 10605 standard. Since it is easily replaced the discharge cups and CR units, various CR constants can be tested with a single discharge gun.



Options for ISO 10605 Standard compliant test

Model	Name
12-00009A	Discharge tip (GT-30R series Spherical 30 mm)
03-00072A	Gun head to GT-30R series for constant 2 kΩ test
06-00074B	CR unit (150 pF - 2 kΩ) to GT-30R series
06-00076B	CR unit (330 pF - 2 kΩ) to GT-30R series
06-00075B	CR unit (330 pF - 330 Ω) to GT-30R series



Gun head for constant 2 kΩ test



CR unit




Discharge tip (Spherical 30 mm)

ESS-S3011A & GT-30RA

High visibility LCD panel and operatability

Reviewed the past operatability, adding Ten-key and Rotary knob realizing an easier and more comfortable operation can be realized. In " 1 IEC STANDARD" in MAIN MENU, since the test levels are preset, the test parameters can be set easily only with selection of the test level. In " 2 MANUAL", voltage, number of times interval and sweep settings of the test can be selected and also the set conditions can be saved. In " 3 SEQUENCE", the set conditions in MANUAL can be recalled for combining them so as to realize the arbitrary sequential tests. In addition, varied functions like setting for gun trigger, automated ESD eliminator, etc. are equipped.

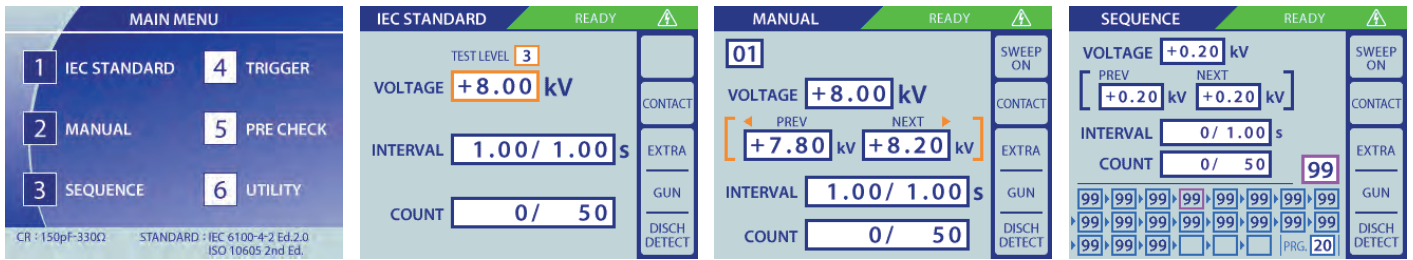

Specifications

Parameter	Specification
Polarity	Positive / Negative
Output voltage	0.20 kV ~ 30.0 kV ± 5% (30.5 kV max) *0.20kV~1.99kV ± 10% 2.00kV~30.0kV ± 5% ~ 10.0 kV : 0.01 kV step ~ 30.0 kV : 0.1 kV step
Repetition cycle	0.05s ~ 600s ± 10% / Manual Set step : 0.01s (0.05 ~ 9.99s), 0.10s (10.0 ~ 600.0s)
Discharge number of times	1 ~ 60,000 times, Preset 1 time step or continuous preset
Discharge mode	Contact discharge / Air discharge
Radiation level mode	NORMAL mode / EXTRA mode
Trigger mode	Gun trigger / Main trigger / External trigger
Operation panel	Color LCD / Push-buttons (Partially lighting)
Gun holder	Standard attached (to hold the discharge gun Model GT-30RA)
Radiation mode select switch	Extra / Normal switching function built-in
Discharge detection	Discharge detection function in air-discharge equipped
Pre-checking function	Following 3 steps function equipped (by user operation. Not the calibration but just checking) STEP1 : High voltage output checking STEP2 : Withstanding voltage checking STEP3 : Discharge relay operation checking
CR & Gun head checking	CR constant and gun head recognizable (indication to prevent a wrong combination)
"IEC STANDARD" test mode	Contact discharge mode : 2.0 kV, 4.0 kV, 6.0 kV and 8.0 kV steps Air discharge mode : 2.0 kV, 4.0 kV, 8.0 kV and 15.0 kV steps
"MANUAL" test mode	Contact / Air discharge mode, Arbitrary setting 0.2 kV ~ 30.0 kV Sweeping function built-in, Recordable up to 99 units
"SEQUENCE" test mode	Enables to operate units set in MANUAL mode continuously. Max. 22 steps / 1 program and the programs recordable up to 20.
Warning lamp	Lighting at voltage output from the generator. Blinking at electro-static discharging
Charge capacitor / resistor	150 pF ± 10%, 330 Ω ± 10% (Built-in CR unit for discharge gun GT-30RA)
Charge resistor in generator	10 M Ω (Totally 53 Ω in combination with 43 M Ω in discharge gun)*
AUX connector	D-SUB 15 pins female connector (for connecting to patrolight, automated ESD eliminator, external interlock input, external trigger input terminal)
Optical communication	Optical connector (serial interface) for connecting to PC connector
Power supply / consumption	AC100 V ~ AC240 V 50 Hz / 60 Hz ± 10% 75VA
Dimensions	Generator : (W)392 mm × (H)312 mm × (D)295.3 mm (gun holder included) Discharge gun : (W)83.3 mm × (H)217.2 mm × (D)229.3 mm
Weight	Generator : approx. 7.5 kg (with Gun Holder) Discharge gun : approx. 800 g (cable and connector excluded)

* The constant depends on combination with CR unit for the discharge gun

■ Details of GT-30RA discharge gun: Discharge gun (with discharge cup 330 Ω test), CR unit 06-00073B (150 pF - 330 Ω), discharge tips (conical / round)

ESD Simulator

ESS-B3011A & GT-30RA

Cost-oriented Basic model

Cost-oriented basic model ESD Simulator equipped with the light weight discharge gun. The output voltage can be selected up to max. 30 kV and compliant to both EN / IEC 61000-4-2 Standard and ISO 10605 Standard.

- “Pre-checking function” for performing a more reliable testing
- “CR constant checking function” (no indicator) to prevent incorrect unit attachment”
- “Discharge Detecting Function” to realize the air-discharge confirmation.
- “Lightest Discharge Gun in the market” to lighten the continuous operation.
- “White LED Irradiator” to facilitate the visualization of the discharging area.
- One-touch exchange of gun head and CR unit realized

* ISO 10605 compliant test performable with addition of the gun head and CR units



*Probe stand for the discharge gun is an option.

ESD simulator
ESS


Specifications

Parameter	Specification
Modell	ESS-B3011A
Output voltage	0.20 kV ~ 30.0 kV \pm 5% (30.5 kV max) *0.20kV ~ 1.99kV \pm 10% 2.00kV ~ 30.0kV \pm 5% ~ 10.0kV : 0.01kV step 10.0 ~ 30.0kV : 0.1kV step
Polarity	Positive / Negative
Repetition cycle	0.05s ~ 9.99s \pm 10%, 0.01s step / Manual
Discharge No. of times	1 ~ 999 times, Preset 1 time step or continuous preset
Discharge mode	Contact discharge / Air discharge
Trigger mode	Gun trigger / Main trigger
Operation panel	Indicator : 5 \times 7 Dot matrix LED / Operation : Push buttons (Partially lighting)
Radiation mode select switch	Extra / Normal switching function built-in
Discharge detection	Discharge detection function in air-discharge equipped.
Pre-checking function	High voltage output checking function (by user operation. Not the calibration but just checking)
CR & Gun head checking	CR constant and gun head recognizable (to prevent the wrong combination without indicator)
IEC LEVEL	Contact discharge mode : 2.0 kV, 4.0 kV, 6.0 kV and 8.0 kV step
Switching function	Air discharge mode : 2.0 kV, 4.0 kV, 8.0 kV and 15.0 kV step
Warning lamp	Lighting at voltage output from the generator. Blinking at electro-static discharging
Charge capacitor / resistor	150 pF \pm 10%, 330 Ω \pm 10% (Built-in CR unit for discharge gun GT-30RA)
Charge resistor in generator	10 M Ω (Totally 53 Ω in combination with 43 M Ω in discharge gun)*
Power supply / consumption	AC 100 V ~ AC 240 V \pm 10% 50 Hz / 60 Hz 75 VA
Dimensions	Generator : (W)270 mm \times (H)263 mm \times (D)200 mm Discharge gun : (W)83.3 mm \times (H)217.2 mm \times (D)229.3 mm
Weight	Generator : Approx. 4.6 kg Discharge gun : Approx. 800 g (excluding cable and connector)

* Remote control function not built-in.

* The constant depends on combination with CR unit for the discharge gun

Discharge output waveform (IEC Standard)

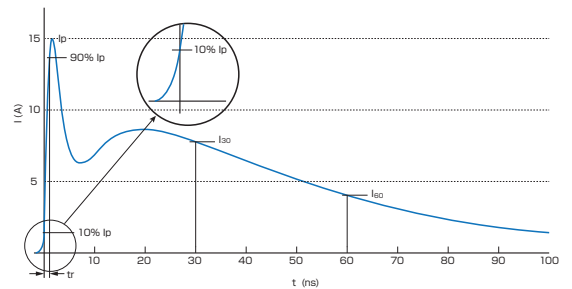

Test environment (Table-top type / Floor-standing type)

ESS-801 / 801GL

Feature

ESD test environment in conformance with EN/IEC61000-4-2 Standard.
Two types for EUT are available, table-top type and floor-standing type so that the environments can support the tests along EUT figures. Since the table is made of wood, influence to the test result should be small (quantifiable test result can be expected since the discharge can be realized in state high frequency electromagnetic field is less lost) and the high reproducibility can be expected and realized. Also, can be versatilely utilized for another tests like impulse noise immunity test, etc.

- ESD test environments in conformance with EN/IEC61000-4-2 standard
- Highly reproducible tests can be performed
- Can be versatilely utilized for other tests


Specifications

ESS-801 (Table-top type)			
Item	Model	Dimensions	Q'ty
Test table	03-00039A	(W) 1600 × (H)800 × (D) 800 mm	1 set
Vertical coupling plane	03-00005A	(W) 500 × (H)500 × (t) 1.5 mm	1 set
Ground plane	03-00007A	(W) 1800 × (D)1000 × (t) 1.5 mm	3 pcs.
Insulating support	03-00004A	(W) 1450 × (D)650 × (t) 0.5 mm	1 pc.
Discharge resistance cable	05-00054B	2 m cable equipped with 470 kΩ × 2 pcs.	2 pcs.
Horizontal coupling plane	03-00020A	(W) 1600 × (D)800 × (t) 1.5 mm	1 pc.

ESS-801GL (Floor-standing type)			
Item	Model	Dimensions	Q'ty
Insulating support	03-00024A	(W) 1200 × (H)1200 × (t) 100mm	1 pc.
Floor-standing vertical coupling plane	03-00034A	(W) 540 × (H)1540 × (D) 500mm	1 pc.
Ground plane	03-00007A	(W) 1800 × (H)1000 × (t) 1.5mm	3 pcs.
Discharge resistance cable	05-00054B	2 m cable equipped with 470 kΩ × 2 pcs	1 pc.




Test setup example with ESS-801
* Contents of the set are as per the specification

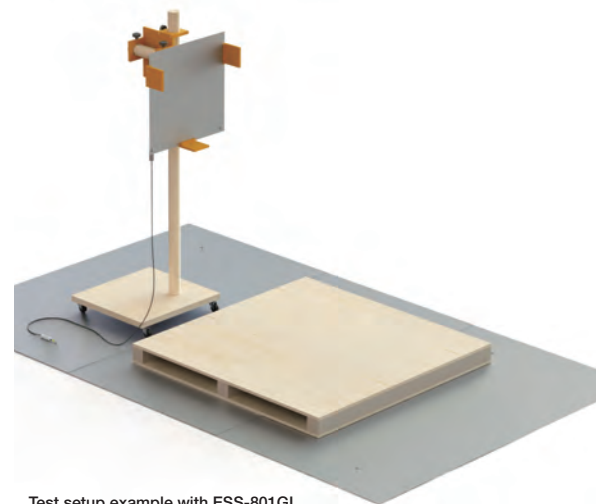

Test setup example with ESS-801GL
* Contents of the set are as per the specification

Options

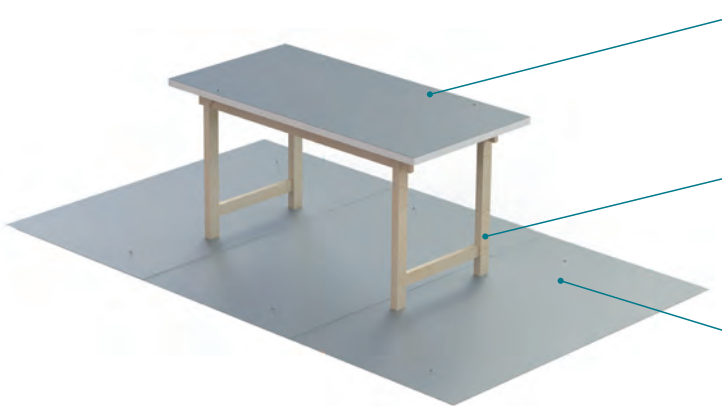

Horizontal Coupling Plane (HCP) MODEL : 03-00020A

Metal plane to be placed onto the table in case of the testing to table top devices.
W1600 × D800 × t1.5mm × 1 pc. (Made of aluminum)

Test Table MODEL : 03-00039A

Wooden table to be used for the test to devices under test (DUT).
W1600 × x H800 × D800 mm

Ground Reference Plane (GRP) MODEL : 03-00007A

Ground plane to be placed just under the wooden table.
W1800 × D1000 × t1.5 mm × 3 pcs. in 1 set (Made of aluminum)

Discharge resistance cable MODEL : 05-00054B



Cable to be used for eliminating the ESD on DUT and connect between HCP and GRP
470 kΩ × 2 pcs./1 set.

Insulating support MODEL : 03-00024A



When doing the electrostatic discharge test to floor-standing equipment, to be used for floating the equipment 10cm higher than the ground reference plane.
Size : W 1200 × D 1200 × H 100 mm
Material : Wooden
Withstanding load : 500 kg

Options

Cubic Insulating Block100 MODEL : 03-00029A

Used for floating EUT 10cm upper than the ground plane in case of testing to floor-standing EUT
 Size : W100 × D100 × H100 mm
 Material : Wood
 Withstanding load: 500 kg

ESD Elimination Brush MODEL : 05-00125A

Brush to eliminate the electrification on EUT / DUT before starting the test.

Automated ESD Eliminator MODEL : 01-00013B

Enable to eliminate electric charge which has been charged to EUT automatically with connection to ESS-S3011A. (Not standardized in the IEC Standard)

- Compatible model : ESS-S3011A

Free Arm Gun Stand MODEL : 03-00022B

Enables to move discharge gun vertically and horizontally to arbitrary desirable discharging point. (Not standardized in the IEC/ISO Standard)

- Compatible discharge gun : GT-30R series
- * Conversion adaptor model 03-00074A is necessary in addition for the attachment to GT-30R series

Probe Stand MODEL : 03-00108A

A probe stand used to fix the discharge gun for ESD Simulator. (Not standardized in the IEC Standard) Because of the articulated type, the discharge gun fixes in any direction.


Parameter	Specification
Dimensions	(H)380 mm, Pedestal diameter 160 mm
Weight	approx. 4.1 kg
Range of movement	Vertical: 150 mm, Swing angle: 130°

- Compatible discharge gun : GT-30R series

Conversion Adaptor for Free Arm Gun Stand MODEL : 03-00074A

Adaptor for connecting between Free Arm Gun Stand 03-00022B and discharge gun GT-30R series.

- Compatible discharge gun : GT-30R series

Insulating Support MODEL : 03-00066A

Sheet to be laid out in between DUT and GRP for the test to automotive electronics devices.
 W1450 × D650 × t2 mm
 Material: PVC (vinyl chloride) transparent



Aluminum Plate for Test MODEL : 03-00053A

Plate to be laid out under tires for the vehicle test
 W500 × D500 × t1.5 mm

Insulating Block MODEL : 03-00054A


Blocks to float (isolate) wirings of DUT from GRP.
 W300 × D300 × H50 mm, 5 pcs. in 1 set

Conductive Mat (for ISO Standard) MODEL : 03-00055A

Mat to be laid out in between DUT and GRP for the ESD susceptibility test in the packaging and handling.
 Surface resistance $10^7 \times 10^9 \Omega$
 W1000 × D500 × t2 mm

Ground Cable (for ISO Standard) MODEL : 05-00104A

Cable to be used for grounding connection required in ISO 10605 (2001). L2000 × W50 mm
 * Not required in ISO 10605 Ed.2 (2008)

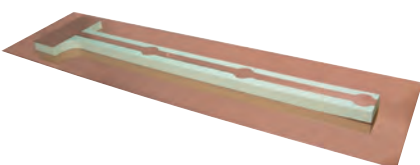Coupling Plane for ISO 10605 Annex F MODEL : 03-00065A

Coupling plane used for the optional test in ISO 10605 Ed.2 (2008). It consists of a coupling plane (made of copper) and an insulation block.
 * Ground reference plane is not included.

Options

CR Units

CR units for GT-30R series ESD Guns

● Compatible discharge gun : GT-30R series

* Please contact us if you require a CR constant other than listed on this page.

* The unit size depends on the capacitor constant.

Model	CR constant
06-00077B	500pF-0Ω
06-00078B	150pF-500Ω
06-00079B	100pF-1.5kΩ
06-00080B	200pF-0Ω
06-00081B	150pF-150Ω
06-00082B	500pF-500Ω
06-00083B	500pF-5kΩ
06-00084B	250pF-100Ω
06-00085B	200pF-100Ω
06-00086B	250pF-0Ω
06-G896	330pF-0Ω
06-G897	150pF-0Ω
06-K1936	200pF-250Ω
06-K1964	330pF-100Ω
06-N2270	500pF-100Ω



● For ISO 10605 compliant test



● GT-30R3302KA package contents

GT-30R series	gun body
03-00071A	gun head
03-00072A	gun head
06-00073B	150 pF - 330 Ω CR unit ①
06-00074B	150 pF - 2 kΩ CR unit ③
06-00075B	330 pF - 330 Ω CR unit ②
06-00076B	330 pF - 2 kΩ CR unit ④
12-00007A	conical tip
12-00008A	round tip
12-00009A	spherical tip



Energy storage capacitor / Discharge resistor values	1st discharge peak current	t ₁ Current	t ₂ Current
150 pF / 330 Ω ①	3.75 A / kV ± 10%	2A / kV ± 30% (t ₁ = 30 ns)	1 A / kV ± 30% (t ₂ = 60ns)
330 pF / 330 Ω ②	3.75 A / kV ± 10%	2 A / kV ± 30% (t ₁ = 65 ns)	1A / kV ± 30% (t ₂ = 130 ns)

Energy storage capacitor / Discharge resistor values	1st discharge peak current	t ₁ Current	t ₂ Current
150 pF / 2 kΩ ③	3.75 A / kV +30% -0%	0.275 A / kV ± 30% (t ₁ = 180 ns)	0.15 A / kV ± 50% (t ₂ = 360 ns)
330 pF / 2 kΩ ④	3.75 A / kV + 30%-0%	0.275 A / kV ± 30% (t ₁ = 400 ns)	0.15 A / kV ± 50% (t ₂ = 800 ns)

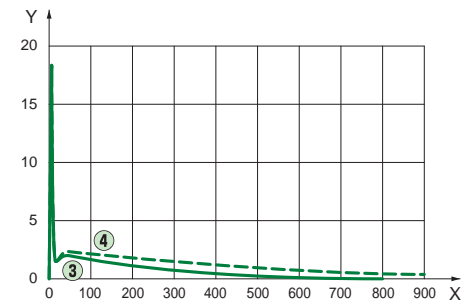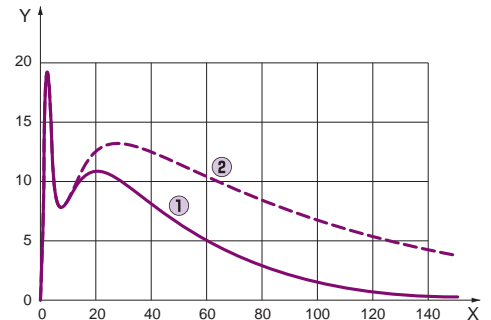

Gun Head MODEL : 03-00071A / 03-00072A



Gun head to be changed according to Standard compliant test. 2 kinds for the test with 330 Ω (03-00071A) and 2 kΩ (03-00072) are available.

● Compatible discharge gun : GT-30R series

Fast Rise Time Adaptor MODEL : 03-00073A



Realize a faster rise time of the discharge current than IEC 61000-4-2 standard value (0.6 ~ 1.0 ns) around 0.2 × 0.3 ns with attachment to the discharge gun. (Not standardized in the IEC Standard)

● Compatible discharge gun : GT-30R series

Impulsive Electric Field Adaptor MODEL : 03-00068A



Adaptor for simulating static induction as one of noise inductive mode with attachment to the discharge gun (Not standardized in the IEC Standard)

● Compatible discharge gun :GT-30R series

Discharge Tips MODELS : 12-00007A / 8A / 9A



Gun discharge tips
The all 3 tips are standard equipped with GT-30R series.

● Compatible discharge gun : GT-30R series



Impulsive Magnetic Field Adaptor MODEL : 03-00069A

Adaptor for simulating electromagnetic induction as one of noise inductive mode with attachment to the discharge gun (Not standardized in the IEC Standard)

- Compatible discharge gun : GT-30R series

Magnetic Field Adaptor MODEL : 03-00070A

Magnetic field adaptor for Ford standard. Connected to GT-30R series discharge gun, it generates transient magnetic fields. (Not standardized in the IEC Standard)

- Compatible discharge gun : GT-30R series

Parameter	Specification
Loop coil diameter	155 mm
Dimensions	168 mm (loop outer diameter) 300 mm (length) 12.7 mm (thickness of the loop)

Extension cable for GT-30R MODEL : 05-00047B

Extension cable in connection between ESD simulator main unit and its discharge gun. The length is 3 m * not compliant with the IEC standard

- Compatible discharge gun :GT-30R series

Gun Holder MODEL : 03-00075A

Holder for discharge gun during the test. Also, can be the pre-checking fixture in combination between ESS-S3011A and GT-30R series.

- Compatible discharge gun : GT-30R series

Specialized Case for Discharge Gun MODEL : 09-00006A

Specialized Case for storing and carrying the discharge gun, CR units and the other related fixtures.

- Compatible discharge gun : GT-30R series

Warning Lamp MODEL : 11-00014B

Warning light used for alerting and calling for attention during the test.

- Compatible model : ESS-S3011A

* The connection is done with DSUB connector.

AUX Connector Junction Box MODEL : 05-00052A

Enable to connect warning lamp, automated ESD eliminator and external trigger simultaneously

- Compatible model : ESS-S3011A

USB Optical Module Kit MODEL : 07-00022A

Optical conversion adaptor Used for remote control with PC. 5 m of optical fiber cable with USB interface attached.

- Compatible model : ESS-S3011A

Options

ESD simulator
ESS

Faraday cage MODEL : FC-200



Faraday cage which is defined in IIEC61000-4-2 Standard and ISO 10605 Ed.2 Standard to verify the discharge current waveform. Easy to move with casters equipped to the bottom.

Parameter	Specification
Power supply	AC100 V 50 Hz / 60 Hz 3 P inlet Equipped with over-current protective breaker
Opening Dimensions on door	(W) 410 mm × (H) 618 mm
Dimensions / Weight	(W)670 mm × (H)1612 mm × (D) 1509 mm Approx. 65 kg, 3p outlet × 2 15 A MAX

Current Target Mounting Board MODEL : 03-00052B



The board to fix the load resistor (MODEL NO. 06-00094A ESD current target) for measuring the discharge current waveform defined in IEC61000-4-2 Standard and ISO 10605 Ed.2 Standard
Dimensions : 1.2 m × 1.2 m

Coaxial Cable MODEL : 02-00157A



High frequency responsible cable to connect ESD target and oscilloscope
BNC-SMA connector (02-00133A) is also available as an option

GND Cable Positioner MODEL : 03-00060A



Stand to pull and fix the ground cable of discharge gun 0.5 m backwards at the middle of the cable when calibrating the ESD current.


ESD Current Target Calibration Set MODEL : 06-00068A

Set to calibrate the ESD target (06-00094A) in conformance with IEC61000-4-2 Ed.2.0 (2008).



Adaptor (06-00068A)

A photo of 06-00094A ESD target and 06-00068A adaptor connected faced to face

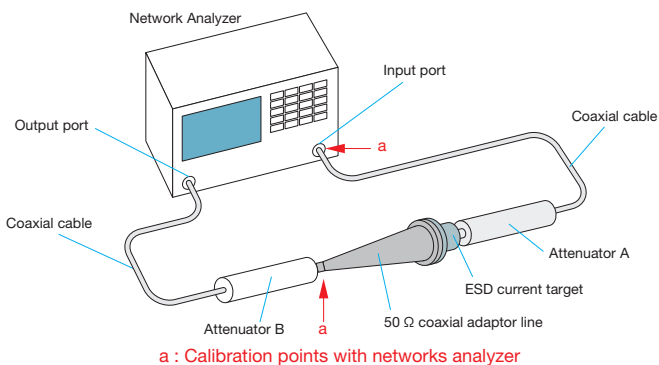

Current Target Mounting Board MODEL : 03-00027A



The board to fix the load resistor (MODEL NO. 06-00094A ESD current target) for simple measuring the discharge current waveform defined in IEC61000-4-2 Standard and ISO 10605 Ed.2 Standard. (not conforming to the standard)
Dimensions : 0.6 m × 0.6 m

ESD Current Target MODEL : 06-00094A



Load resistor to measure, verify and calibrate ESD current waveform defined in IEC61000-4-2 Standard and ISO 10605 Ed.2 Standard

Parameter	Specification
Injection voltage (pulse)	30 kV MAX
Input resistance	2.04 Ω
Output impedance	2.04Ω
Insertion loss (S21)	≤1GHz : Within ±0.5dB 1GHz~4GHz : Within ±1.2dB
Output connector	SMA type
Dimensions/Weight	70 φ × 35 mm / Approx. 480g

Discharge Gun Mount MODEL : 03-00061B




Fixture to load and fix the discharge gun to the Faraday cage (FC-200) or current target mounting board (03-00052B)

Attenuator MODEL : 00-00022A


Attenuator to protect measurement equipment for ESD current waveform.
Attenuation ratio 20 dB



Insertion of 20 dB attenuator is recommended for protecting the oscilloscope

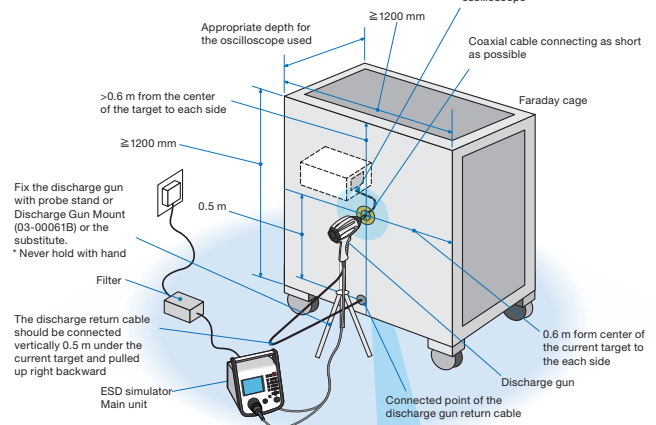


Connecting method of ESD target

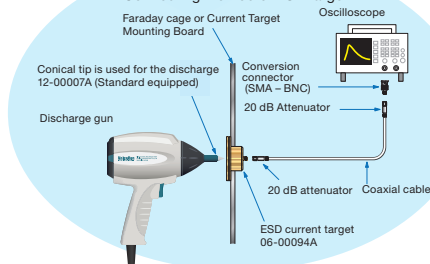

Micro-gap Discharge Tip MODEL : 12-00010A



Enabling a more stringent evaluation for the real world ESD immunity

Connected to the NoiseKen ESD gun, this tip allows for a waveform with higher peak amplitude and a faster rise time. It is a common view that ESD immunity testing is the most challenging and passing the standard test does not always assure real world immunity. This tip is helpful for more extensive testing against non-standardized field events



Gun Head Model : 03-00103A





- Events you can simulate are
- Loose screws
- Poor insulation coating
- Poor electrical connection between components and others which cause secondary discharges within a very close distance

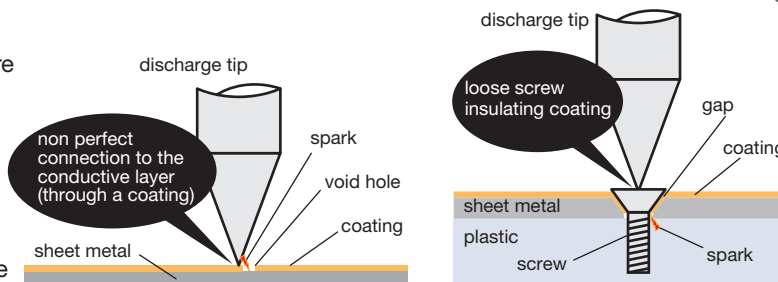

enlarged photo of the micro-gap

Simulated field events

■ Output waveform (reference)

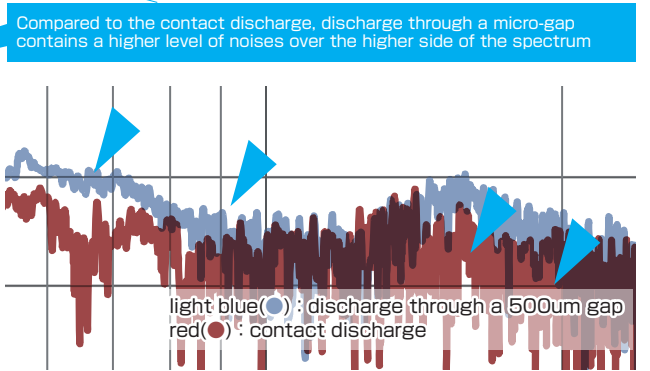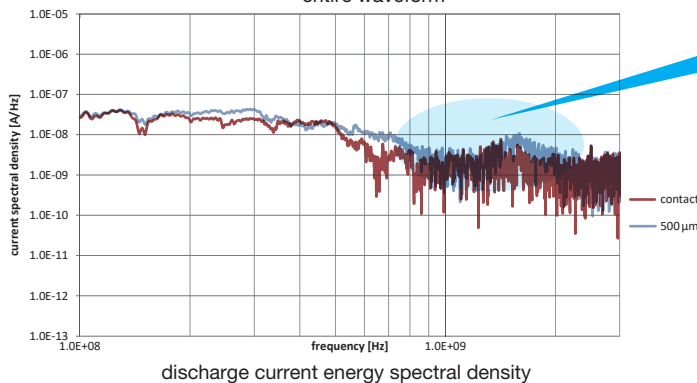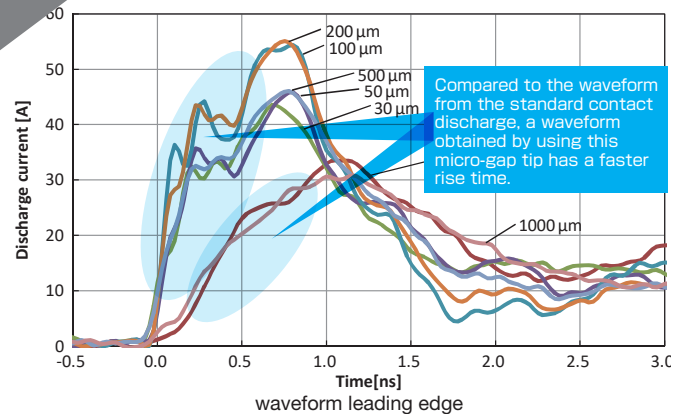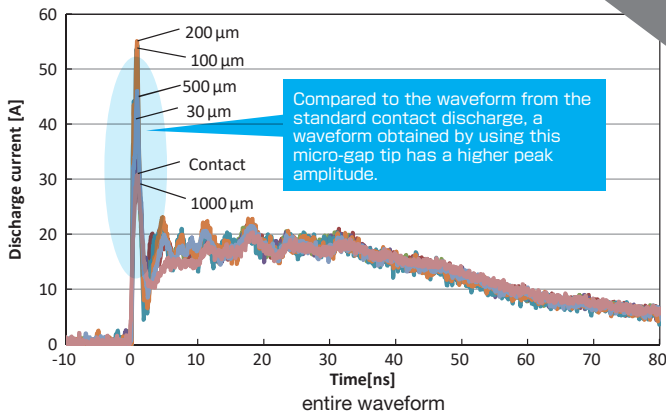

Testing with energy rich pulses for the GHz band

■ Compatible discharge guns

TC-815S, 815R, 815ISO, 815-330, 815-2K, 815S-330, GT-30R series (the Gun Head 03-00103A required)

*This product cannot be used for the air discharge testing

IEC61000-4-2 Ed.2 Test Standard Overview

1. General

The international immunity test standard which applies to electronic equipment against ESD generated directly from a human body or near metal objects in condition chemical fibers carpets or clothings are used in low humidity relatively. This standard assumes cases when charged human body discharges to electronic equipment and testing with the circuit to simulate current waveform generated in such conditions.

2. Test Levels

Test level range for the ESD

The levels as below.

Level	Test voltage (contact discharge)	Test voltage (air discharge)
1	2 kV	2 kV
2	4 kV	4 kV
3	6 kV	8 kV
4	8 kV	15 kV
X	Special	Special


* x can be any level determined by consent between the manufacturer and the user

3. Test Generator and Waveform Verification


Generator specification

The generator must satisfy following specification.

Energy accumulation capacity	150 pF (typical)
Discharge resistance	330 Ω (typical)
Output voltage	8 kV / Contact discharge, 15 kV / Air discharge
Tolerance of output voltage	± 5%
Polarity of output voltage	Positive and negative (Switching available)
Hold time	> = 5 sec.
Discharge mode of operation	Single discharges (Discharge interval > = 1 sec)
Waveform of discharge current	See right figure

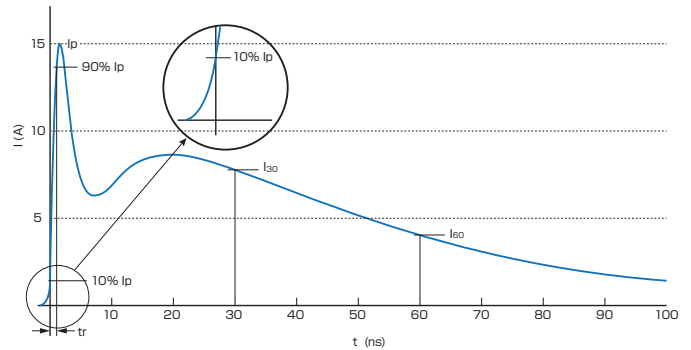

Discharge current waveform and its characteristics

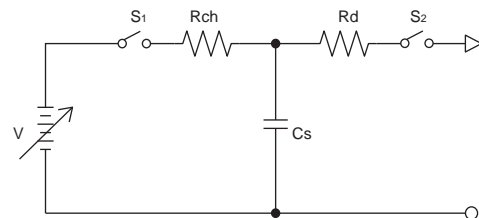

Capacitance C_s : 150 pF
Discharge resistance R_d : 330 Ω

Simplified diagram of the ESD generator

Generator characteristics

The characteristics in the following table must be verified in order to compare the tests results among different generators


Level	Indicated voltage	1 st peak current of discharge (± 15%) I_p	Rise time (± 25%)	Current (± 30%) at 30 ns	Current (± 30%) at 60 ns
1	2 kV	7.5 A	0.8 ns	4 A	2 A
2	4 kV	15 A	0.8 ns	8 A	4 A
3	6 kV	22.5 A	0.8 ns	12 A	6 A
4	8 kV	30 A	0.8 ns	16 A	8 A

IEC61000-4-2 Ed.2 Test Standard Overview

Waveform verification of ESD Generator

Measure the waveform with an oscilloscope with bandwidth of 2 GHz or more upon use of Faraday cage and the current target.

Attach the discharge electrode directly to the current target and operate the generator with the contact discharge mode.

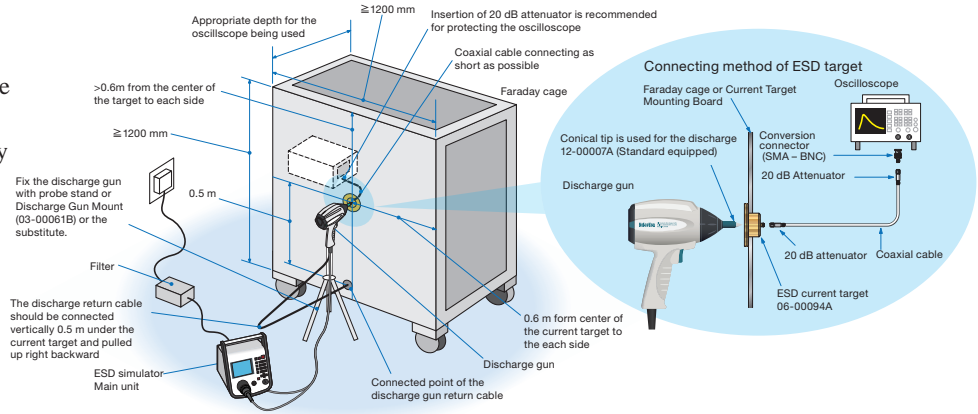

* Insertion use of approx. 20 dB attenuator for protecting the measurement equipment is recommended, although it is not specified in the IEC Standard.


4. Test setup

Example of test set-up for table-top equipment

The direct discharge test is an electrostatic direct discharge to EUT for examining its influence to the EUT.

Put a wooden table which height is 0.8 m on the ground plane and place horizontal coupling plane (HCP 1.6 m × 0.8 m). Connect the HCP with resistor 470 kΩ × 2 to the ground plane and lay an insulation sheet between the HCP and the EUT.

The indirect discharge test is an electrostatic discharge to the HCP and vertical coupling plane (VCP 0.5 m × 0.5 m) for examining its influence to the EUT. Connect the VCP with resistor 470 kΩ × 2 to the ground plane as well.

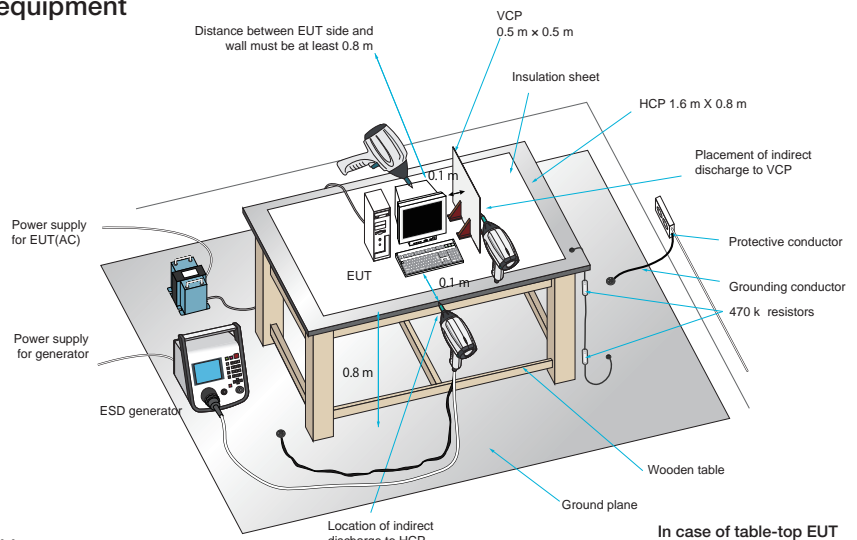


* The isolation transformer for EUT is not specified in IEC Standard.

Example of test set-up for floor-standing equipment

Put an insulation pallet which height is 0.1 m onto the ground plane and place EUT on the pallet for the direct discharge test.

The indirect discharge test is an electrostatic discharge to the VCP for examining its influence to the EUT. Connect the VCP with resistor 470 kΩ × 2 to the ground plane as well.

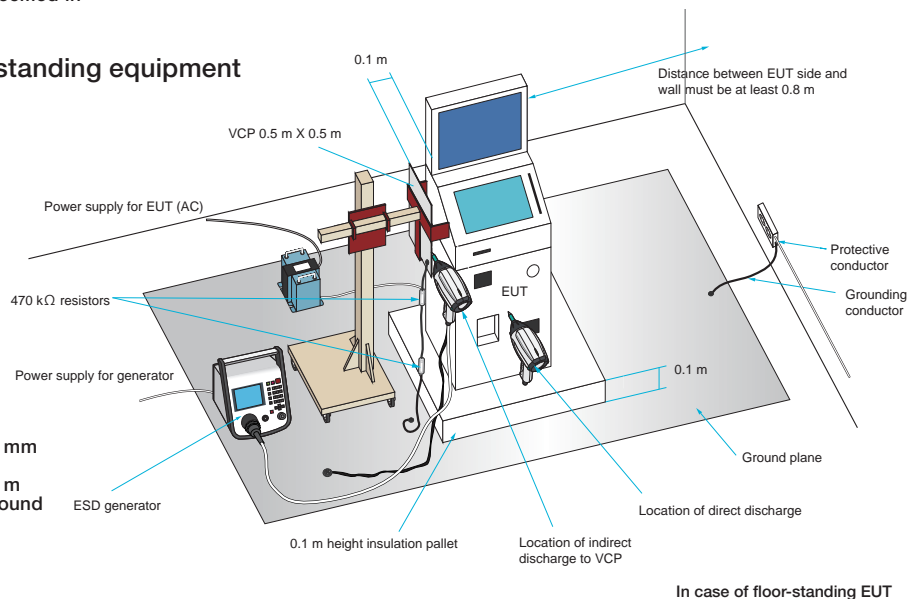

* Float cables from the ground plane with 0.5 mm thickness insulation sheet.
* Keep GND cable of the discharge gun ≥ 0.2 m from any conductive parts other than the ground plane
* The isolation transformer for EUT is not specified in IEC Standard.

IEC61000-4-2 Ed.2 Test Standard Overview

5. Test Procedure

■ Climatic and Other Environmental Conditions

It is necessary to let the equipment brought in from different climatic conditions to fully adjust to testing environment before performing the test. Also, in order to stabilize the discharging condition certainly, it is necessary to fix the climatic conditions in the test room. Fulfillment of the conditions listed in following table must be required to perform testing in conformance with IEC61000-4-2.

Ambient temperature	15°C to 35°C
Relative humidity	30% to 60%
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1060 mbar)
Electromagnetic conditions	Level not to affecting test result

■ Test Procedure

Direct discharge test : Contact discharge (at 1 second interval) and air discharge (at max. 5 sec. cycle)

Indirect discharge test : Discharge to VCP and HCP

At least 10 single discharges shall be applied at 1 second or longer interval in both positive and negative polarities.

* A preliminary test with discharges 20 times or more per second may be done in order to select the points to which single discharges should be applied.

6. Evaluation of Test Results and Test Report

The tests results are classified into following 4 patterns according to specifications of EUT and operating conditions.

- 1) Normal operation within the tolerance of the specification
- 2) Temporary degradation or loss in the operation or the function which is able to be recovered by a self-recovery function
- 3) Temporary degradation or loss in the operation or the function which needs to be recovered by user intervention or reset in the system.
- 4) Damage of the system (parts) or software, and unrecoverable degradation in the function due to loss of the data.

Generally, as far as the EUT is immune to the ESD during testing and it satisfies the functional requirements according to the product specification after testing, the test result can be perceived as "Pass"

The test report shall contain the test conditions and the result.

Notes: This test procedure and test set-up are extracted from IEC 61000-4-2 Ed.2 (2008) and JIS C 61000-4-2 ed.2.0 (2012) Standards for applying to our products. Please refer to the Standards for more details.

ISO 10605 Ed.2 Test Standard Overview

1. General

Electrostatic discharges which are generated both in vehicles and while we get on and off there can be factors to cause malfunction of the electrical devices and components. Nowadays, more attention has been paid, as vehicles install more and more electronic devices and components. This Standard regulates that static electricity is discharged to the electronic devices or equipment from the charged human body and tests are simulated by electrical circuit to reproduce the electric current waveform at the discharge.

In addition to procedures for the immunity tests and evaluations in state that the electronic devices or equipment work while the vehicle is driving, the Standard also regulates tests procedures to evaluate the immunity of the each module against simulated human discharges during the assembly process or in servicing.

2. Test levels

The following tests levels are for reference. The categories are classified according to functional importance of the electronics devices/ components.

Component test – Example severity levels for direct contact discharge and direct air discharge (Function performance status)

Test severity level	Direct contact discharge			Direct air discharge		
	Category 1	Category 2	Category 3	Category 1	Category 2	Category 3
Level 4	± 8 kV	± 8 kV	± 15 kV	± 15 kV	± 15 kV	± 25 kV
Level 3	± 6 kV	± 8 kV	± 8 kV	± 8 kV	± 8 kV	± 15 kV
Level 2	± 4 kV	± 4 kV	± 6 kV	± 4 kV	± 6 kV	± 8 kV
Level 1	± 2 kV	± 2 kV	± 4 kV	± 2 kV	± 4 kV	± 6 kV

Component test – Example severity levels for indirect contact discharge (Function performance status)

Test severity level	Indirect contact discharge		
	Category 1	Category 2	Category 3
Level 4	± 8 kV	± 15 kV	± 20 kV
Level 3	± 6 kV	± 8 kV	± 15 kV
Level 2	± 4 kV	± 4 kV	± 8 kV
Level 1	± 2 kV	± 2 kV	± 4 kV

Vehicle test – Example severity levels for contact discharge and air discharge (Test points accessible only from inside vehicle)

Test severity level	Contact discharge			Air discharge		
	Category 1	Category 2	Category 3	Category 1	Category 2	Category 3
Level 4	± 6 kV	± 8 kV	± 8 kV	± 8 kV	± 15 kV	± 15 kV
Level 3	± 4 kV	± 4 kV	± 6 kV	± 6 kV	± 8 kV	± 8 kV
Level 2	± 2 kV	± 2 kV	± 2 kV	± 4 kV	± 4 kV	± 6 kV
Level 1	–	–	–	± 2 kV	± 2 kV	± 4 kV

Vehicle test – Example severity levels for contact discharge and air discharge (Test points accessible only from outside vehicle)

Test severity level	Contact discharge			Air discharge		
	Category 1	Category 2	Category 3	Category 1	Category 2	Category 3
Level 4	± 6 kV	± 8 kV	± 8 kV	± 15 kV	± 15 kV	± 25 kV
Level 3	± 4 kV	± 6 kV	± 6 kV	± 8 kV	± 8 kV	± 15 kV
Level 2	± 2 kV	± 4 kV	± 4 kV	± 4 kV	± 6 kV	± 8 kV
Level 1	–	–	± 2 kV	± 2 kV	± 4 kV	± 6 kV

3. Specification of generator and verification of output waveform

■ Specification of ESD simulator

A simulator satisfying the following specifications must be used for the ESD Testing.



Parameter	Specification
Output voltage - Contact discharge- (kV)	2 kV ~ 15 kV
Output voltages - Air discharge- (kV)	2 kV ~ 25 kV
Output voltage accuracy (%)	≤ 5%
Polarity	Positive and negative
Rise time of short circuit current in contact discharge mode (10% to 90%)	0.7 ns ~ 1 ns
Holding time	≥ 5 s
Storage capacitances (pF)	150 pF, 330 pF
Discharge resistances (Ω)	2 kΩ, 330 Ω

ISO 10605 Ed.2 Test Standard Overview

Contact discharge mode current specifications

Following discharge characteristics must be verified.


Typical capacitance / resistance values	Peak current / charge voltage	Current at T1 / Charge voltage	Current at T2 / Charge voltage
① 150 pF / 330 Ω	3.75 A / kV ± 10%	2 A / kV ± 30% (t1 = 30 ns)	1 A / kV ± 30% (t2 = 60 ns)
② 330 pF / 330 Ω		2 A / kV ± 30% (t1 = 65 ns)	1 A / kV ± 30% (t2 = 130 ns)
③ 150 pF / 2 kΩ	3.75 A / kV + 30% -0%	0.275 A / kV ± 30% (t1 = 180 ns)	0.15 A / kV ± 50% (t2 = 360 ns)
④ 330 pF / 2 kΩ		0.275 A / kV ± 30% (t1 = 400 ns)	0.15 A / kV ± 50% (t2 = 800 ns)

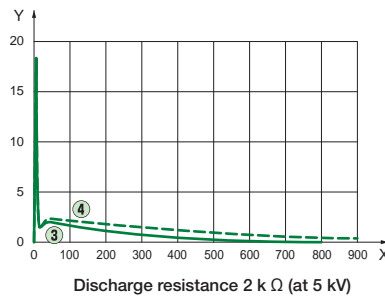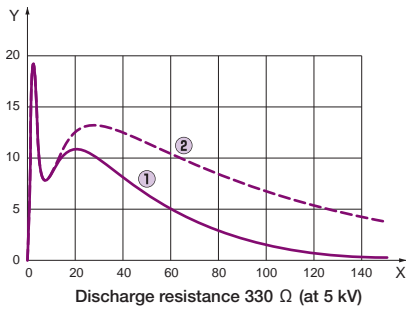


Verification of output current waveform

The waveform shall be verified with an oscilloscope which bandwidth is 1 GHz or more in a Faraday cage or with a 1.2 m × 1.2 m metallic board mounting an ESD current target in the center of the cage or the board. The discharge electrode (Discharge tip of the gun) shall be touched onto the target and the discharge mode shall be set at the contact discharge mode.

The discharge return cable shall be turned up the center of the length and connected to vertically 0.5 m under the target on surface of the Faraday cage or board.

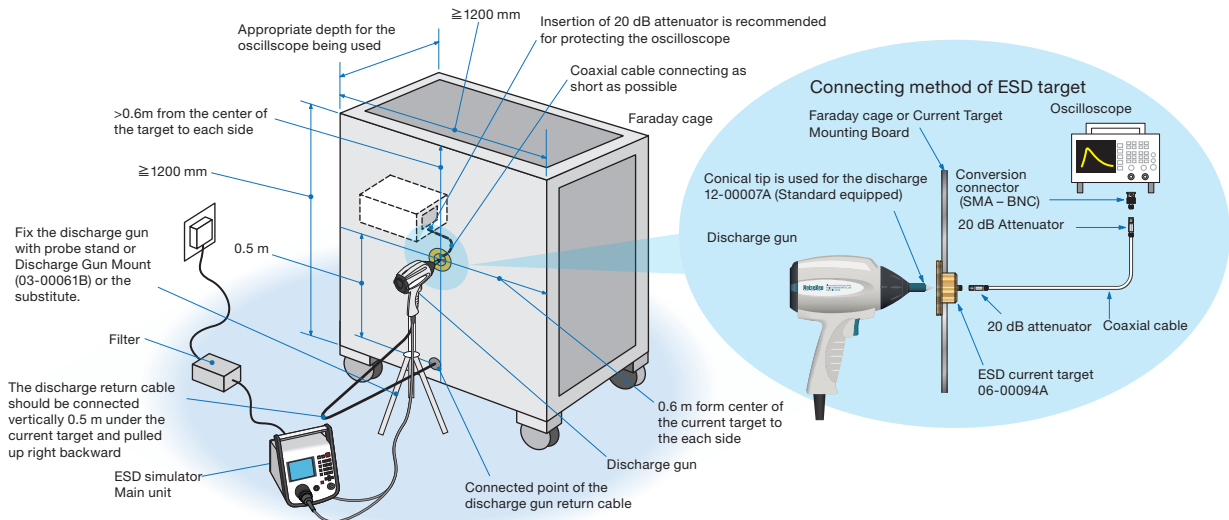

Target Calibration

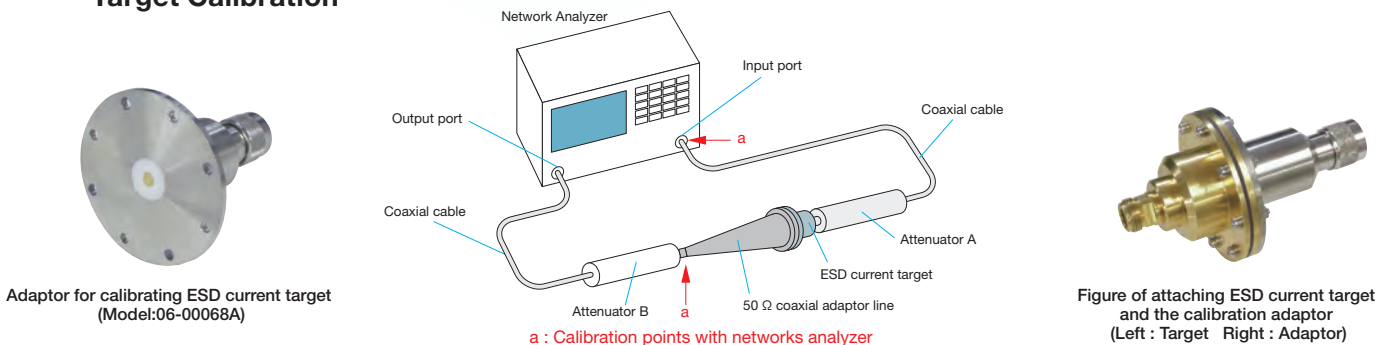


ISO 10605 Ed.2 Test Standard Overview


4. Test setup and test procedure

■ For testing powered DUT immunity to direct ESD - Contact discharge and air discharge

- Capacitance shall be selected to 150 pF (In case for components accessible from outside vehicle) or 330 pF (In case for components accessible from inside vehicle) and resistance shall be 330 Ω .
- Conduct tests of two or more levels.
- At least 3 discharges shall be applied both to the positive and negative polarities with the interval not less than 5s. The time intervals between successive single discharges in the indirect discharge shall be longer than 50 ms and the number of the test shall be > 50 times. (Discharge interval 1s or more during contact discharge)
- In the contact discharge, it shall be done to wherever human finger may touch.
- In the air discharge, the speed of approach should be between 0.1 m / s and 0.5 m / s and the discharge tip is held perpendicular to the surface of the DUT when possible; if not possible, an angle of at least 45° to the surface of the DUT is preferred.
- Insulating blocks shall be used for DUT which is not grounded to the chassis directly.

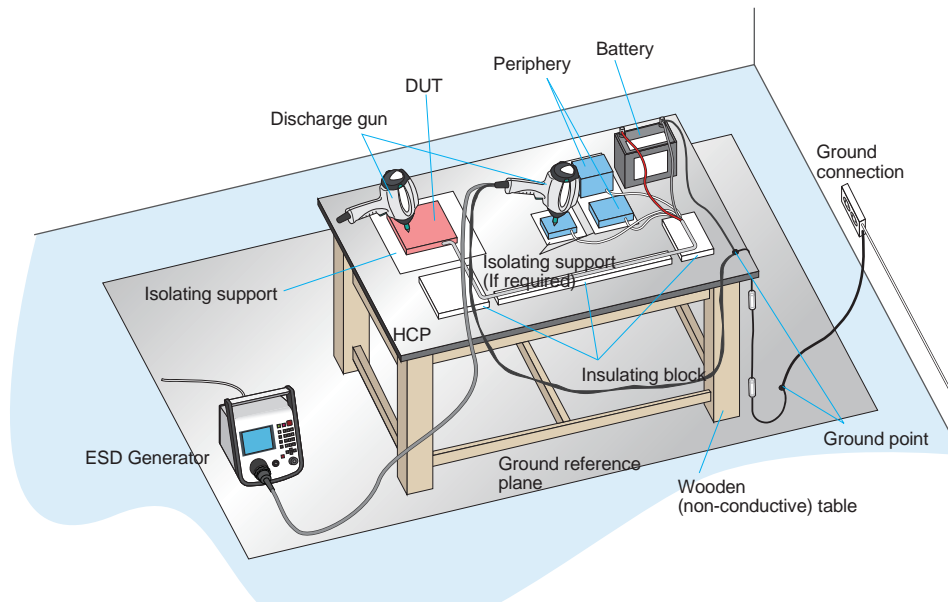

■ For testing powered DUT immunity to indirect ESD

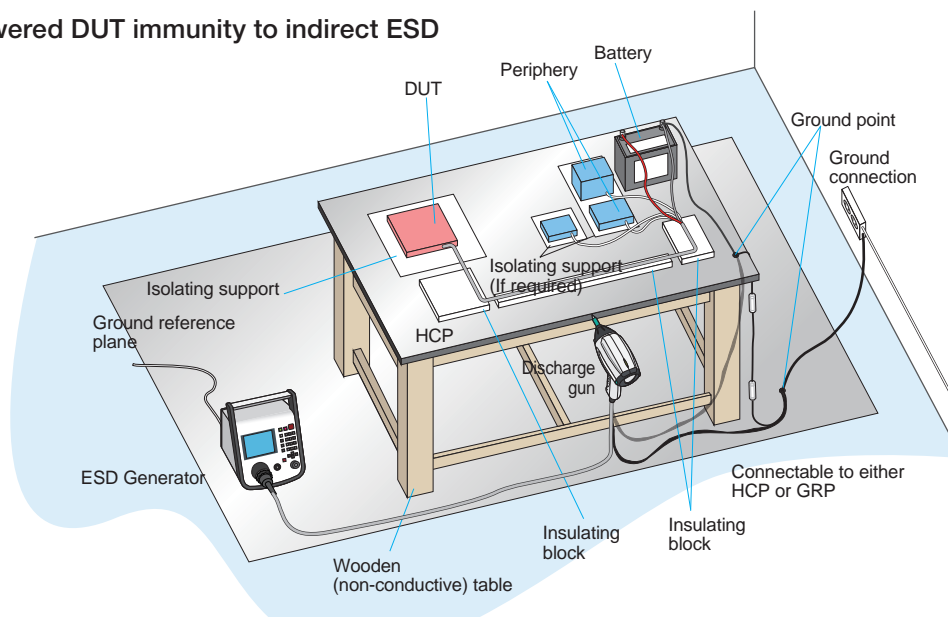


ISO 10605 Ed.2 Test Standard Overview

ESD simulator
ESS


■ For testing (unpowered) packaging and handling ESD sensitivity

- Capacitance shall be selected to 150 pF (Although the resistance value is not regulated, it is recommended to perform the tests supposing both resistance when the DUT may be directly accessible by human body (2 kΩ) and it may be accessible by a metal object a human holds (330 Ω))
- Conduct tests of two or more levels.
- At least 3 discharges shall be applied both to the positive and negative polarities with the interval not less than 1s.
- In the contact discharge, it shall be done to wherever human finger may touch.
- Charge build-up should be eliminated by briefly connecting a bleeder wire with high resistance (> 1 MΩ) after the discharge and the DUT shall be turned on. Afterwards, normal operation of it shall be confirmed.

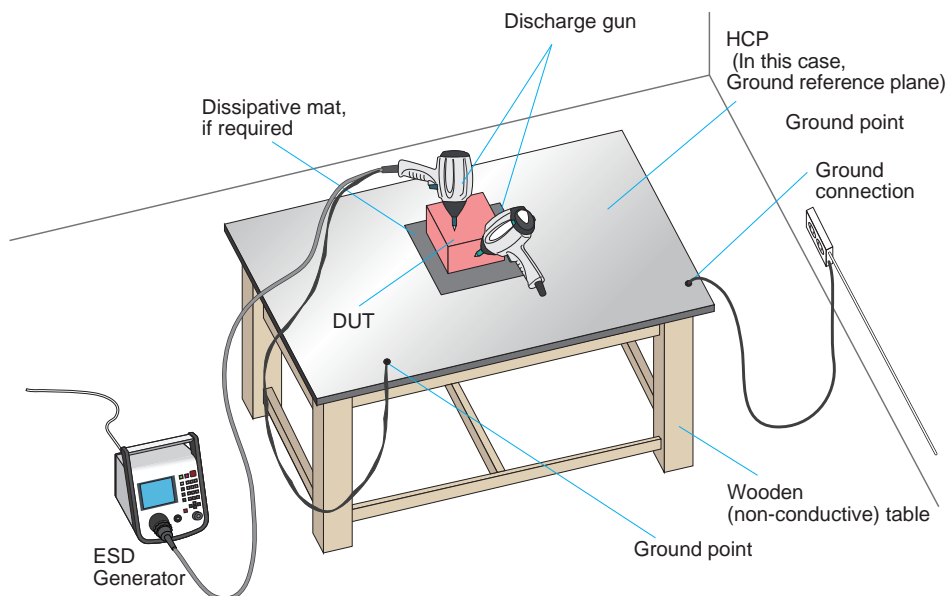


■ Vehicle test – Internal and external points

- Choose a generator capacitance of 330 pF for areas that can easily be accessed only from the inside of the vehicle and resistance of 330 Ω or 2 kΩ
- Choose a capacitance of 150 pF for points that can easily be touched only from the outside of the vehicle and resistance of 330 Ω or 2 kΩ.
- The ESD generator ground shall be connected to chassis like the seat-rail in case of the interior test or connected to a metallic plate under the wheel closest to the application point in case of the exterior test.
- Both the contact discharge and air discharge shall be done both for the internal and external tests.

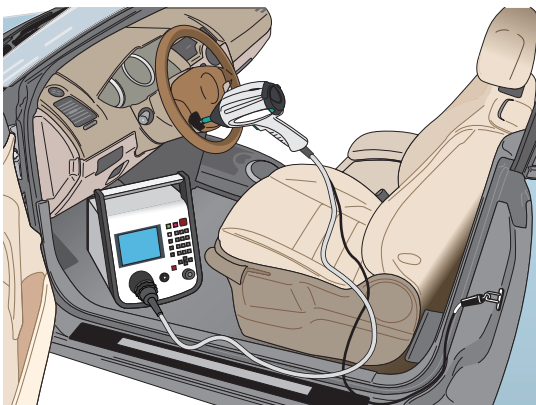


Internal test

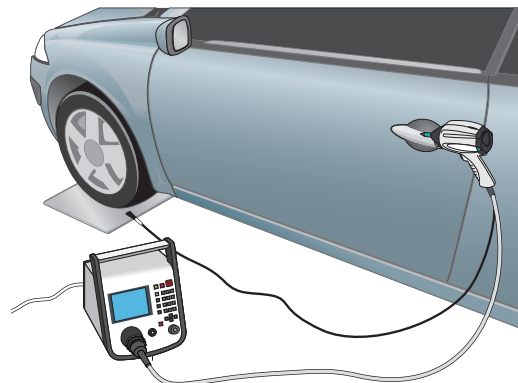

External test

ISO 10605 Ed.2 Test Standard Overview

■ Optional test set-up and procedure for electronic modules (powered-up test) – Direct and indirect discharge

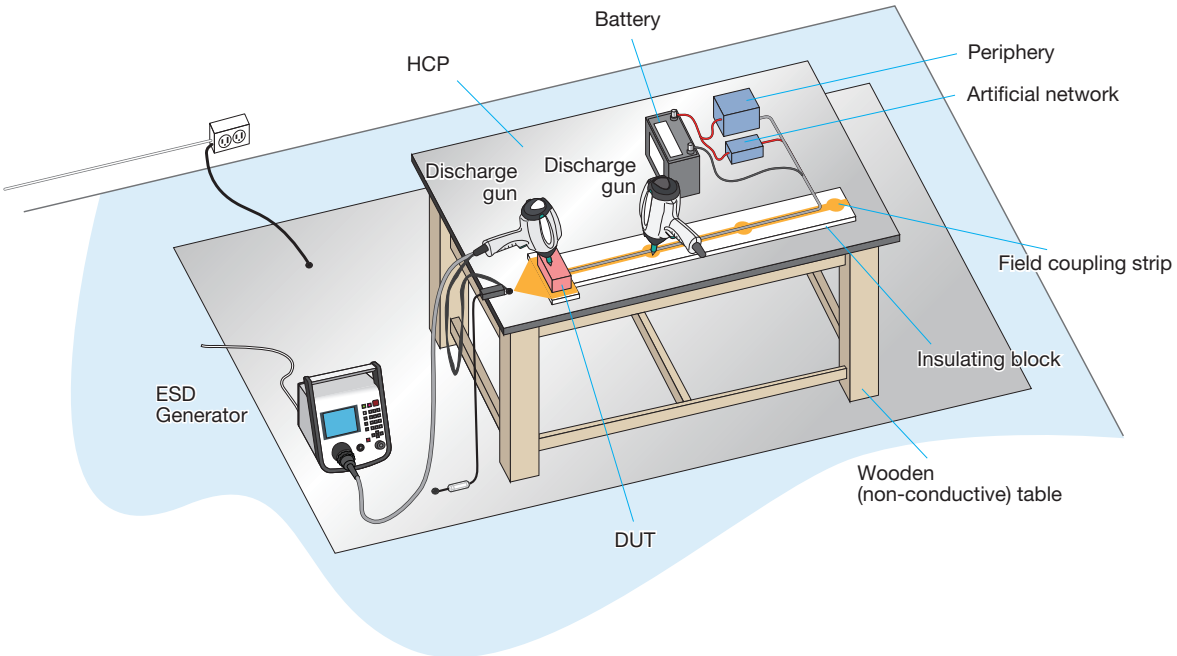

Notes: This test set-up is quoted from ISO10605 ed2.0 (2008) Standard.
Please refer to the Standard if more details are required.



Impulse Noise Simulator (semi-conductor type)
INS-S220 / S420

To solve the real trouble in the market

This Noise simulator simulates high frequency noises generated by ON/OFF switching at contact points of switches or relays, and arcs caused by electric motor, allowing to evaluate the resistibility of electric devices.

The Pulse contains wide range of frequency components and energy volume is changeable by adjusting pulse width. This allows conducting of highly-reproducible noise tests for noise troubles in the market.





- Button touch instead of coaxial cable replacing reduces pulse width setting time.
- Pulse waveform stability has improved, allowing highly-reproducible testing.
- Consumable parts reduction cut down running cost.
- Common mode/normal modes are easily switched between by a short plug.
- "Test time setting" new function simplifies test time setting.
- Wiring became easier thanks to a built-in 50Ω terminator resistor design.
- Repetition cycle became faster. Due to high repetition, malfunction occurrence rate is up and test time is shortened.(only INS-S220)
- Outlet Panel allows direct connection of EUT AC plug.(option)
- Various tests are available by using different probes and coupling clamps.(option)
- Using of external CDN allows testing to 3-phase EUTs.(option)
- Dedicated software simplifies testing with various test conditions (option, applicable to INS-S420 only)

Noise Simulator
INS

Features

To solve the trouble in the market
Test pulse with adjustable high frequencies and energy volume


Narrow pulse of 50-100ns width although contains small energy, greatly affects electric circuits due to two transient fluctuations of short-time rise and fall and inductive coupling by steeply generated electromagnetic field. Wide pulse of 800ns-1000ns contains more energy, making it easy to apply large voltage fluctuations to the circuit. The rise time of impulse simulator is faster than IEC61000-4-4 fast transient/burst test and contains high frequency components up to 1GHz. Therefore, when noise is applied to the EUT, it is easier to penetrate and affect the electronic circuit. In addition, since the included frequency spectrum components and intensity differ depending on the pulse width of the impulse, it is recommended to conduct tests with several types of pulse widths.

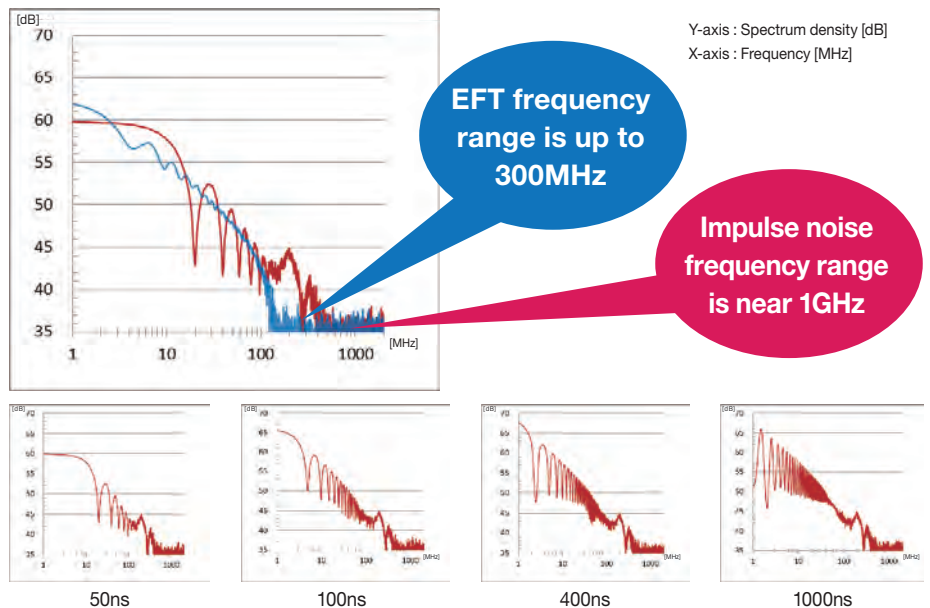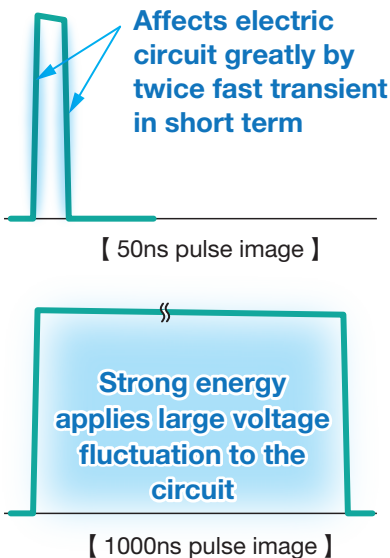

INS-S220 / S420

Improved reproducibility of test results Allows for more quantitative testing

By changing from the conventional mercury relay to the semiconductor relay, the stability of the test pulse waveform has been improved, enabling tests with more quantitative and highly reproducible test results than before. In addition, the output waveform defect occurring with the mercury relay deterioration has been eliminated.

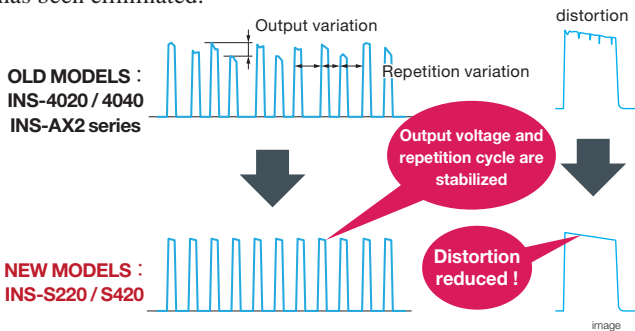

Pulse Width setting simplified Setting time reduced

Pulse width setting in old models (INS-4020/4040) required troublesome manual cable connection switching. New Impulse Noise Simulator models INS-S220/S420 setting is simple by pushing buttons, reducing setting time and helping avoid connection errors.




Complicate cable connection setting becomes...

SIMPLE with button operations.

Operating Cost reduction Consumable parts reduced


Adopted semiconductor type relay instead of old mercury type relay (consumable). Consumables such as pulse width setting cables and mercury relays are no longer required, reducing replacement costs.

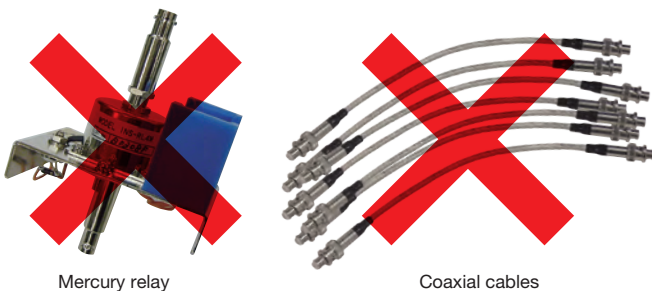

Improved malfunction occurrence rate Contributes to testing time reduction

By speeding up the test pulse repetition period compared to old models, product malfunction occurrence rate should increase contributing to overall test time reduction.

Example : In case the repetition cycle is 2ms

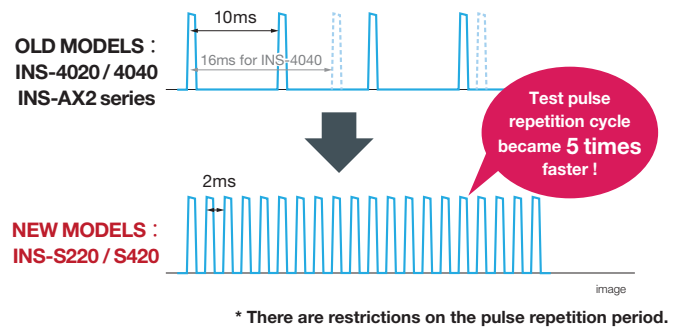

Connection simplified Connection time reduced

Outlet panel was adopted for easy EUT connection. By using an outlet panel (optional) matching the shape of each country, you can easily connect EUT for the test.



Easy Noise countermeasurement Identify the malfunction location

A large number of noise application options are available for power lines, communication lines, harnesses, housings, and board levels, making it easy to identify malfunction locations.



Noise Simulator
INS

INS-S220 / S420

Specifications

Parameter	INS-S220	INS-S420	
Pulse settings-1	Pulse output voltage	0.50kV ~ 0.99kV ±10% 0.01kV step	-
	Pulse width	100ns ~ 1000ns ±10% 50ns step	
	Repetition cycle	1ms ~ 999 ms ±10% 1ms step	
Pulse settings-2	Pulse output voltage	1.00kV ~ 2.00 kV ±10% 0.01kV step	0.50kV ~ 4.00kV ±10% 0.01kV step
	Pulse width	50ns ~ 1000 ns ±10% 50ns step	50ns ±15%, 100ns ~ 1000ns ±10% 50ns step
	Repetition cycle	10ms ~ 999 ms ±10% 1ms step	
Output voltage	0.5 ~ 2.00kV±10% (10V step)		
Polarity	+ / -		
Rise time	<3ns		
Output impedance	50Ω		
Terminal resistance	50Ω		
Pulse repetition modes	LINE PHASE	50Hz/60Hz injection phase angle 0 ~ 360° ±10° (1° step) synchronized with L-N of EUT supply or external CDN	
	VARIABLE	1ms ~ 999ms ±10 % (~ 1kV) *pulse settings-1 10ms ~ 999ms ±10 % (1kV ~ 2kV) *pulse settings-2	10ms ~ 999ms ±10 %
	EXT TRIG	Period : >10ms Input signal level : TTL/open collector negative logic Pulse width : >1ms When LINE PHASE mode is selected and there is an input with a period of 16 to 20 ms, it is recognized as a zero-cross sync signal for external CDN.	
	1 SHOT	Single pulse generation each time the 1 SHOT button is pressed. Synchronized (phase angle set on the PHASE control) or asynchronous pulse period.	
Memory storage	5 tests		
Test time	1s ~ 999s ±10% 1s step		
Coupling switch	L(+), N(-), PE / PULSE OUT *manual switch by coaxial cable		
Coupling mode	common-mode / normal-mode *manual switch by short plug		
EUT power capacity	Single phase AC240V / DC125V 16A (L(+), N(-), PE)		
External control	N/A	RS-232C compliant optical communication	
Power supply	AC100 ~ 240V 50Hz/60Hz		
Operating temperature / humidity	15 ~ 35°C / 25 ~ 75%		
Dimensions / weight	(W) 430× (H) 249× (D) 540mm (protrusions excluded) / approx. 20kg	(W) 430× (H) 349× (D) 540mm (protrusions excluded) / approx. 23kg	
HV coaxial cable connector	NMHV Noiseken custom type		
Accessories	coaxial cable 30cm (02-00155A): 2pcs, SG short plug (02-00106A): 1pc, SG cable (05-00103A): 1pc, outlet panel: 1pc, AC cable: 1pc, Instruction Manual: 1 volume, accessories bag: 1pc		



Automatic CDN for Impulse Noise Simulator

IJ-AT450

Automatic CDN for Impulse Noise Simulator (Model:IJ-AT450) is a superposition unit allowing testing to 3-phase AC lines and high-voltage DC lines by combining with the Impulse Noise Simulator. By performing remote control from Windows PC using dedicated software, the tester can automatically perform the test such as setting of voltages and applied phase, as well as sequence control.

- Tests can be performed on three-phase four-wire lines up to AC500V/50A.
- Testing to DC-lines up to DC250V/50A is also possible.
- EUT line switch allows the AC/DC line to be shut off.
- Emergency stop switch to stop the test in case of emergency.

Parameter	Specifications
Input pulse voltage	4kV terminating resistance 50 Ω is connected
EUT power capacity	AC: 3-phase, 4-wire (L1, L2, L3, N) 500V / 50A DC:250V / 50A
Input and output terminals	Input terminal: Terminal block Output terminal: Terminal block panel
High voltage coaxial connector	NMHV type *NoiseKen custom
Superimposed phase switching	Switching by selection operation *Switching by the front switch of the main unit or remote software.
Zero Cross Detection	Detected from between L1-L2
Line protection circuit	Mounted with shut-off circuit device *Connectable/releasable input and output
Emergency stop	Built-in mushroom-type switch for push-lock and rotation-release
External control	Remote control from PC with optical I/F circuit
Power supply	AC100 ~ 240V 50Hz/60Hz
Operating temperature /humidity	Temperature: 15 to 35° Humidity: 25 to 75%
Dimensions/weight	(W)430×(H)199×(D)540mm (protrusions excluded) / Approx. 24kg
Accessories	BNC coaxial cable (02-00159A): 1pc, high-voltage coaxial cable (02-00160A): 1pc, AC cable: 1pc, SG cable (05-00172A): 1pc, outlet panel (18-00074A): 1pc, instruction manual: 1 volume, accessories bag: 1pc.



IJ-AT450 in connection with INS-S420

Noise Simulator
INS

Easy switching of application phase Setting time reduced

In the old model, setting the applied phase was troublesome requiring manual switching using the dedicated coaxial cables and short-plug. IJ-AT450 simplifies switching and reduces setting time and helps avoid connection errors.




Applied phase switching with coaxial cables is troublesome..



Button operation makes it easy!!



Connection simplified Connection time reduced

Outlet panel was adopted for easier EUT connection and conducting the test.

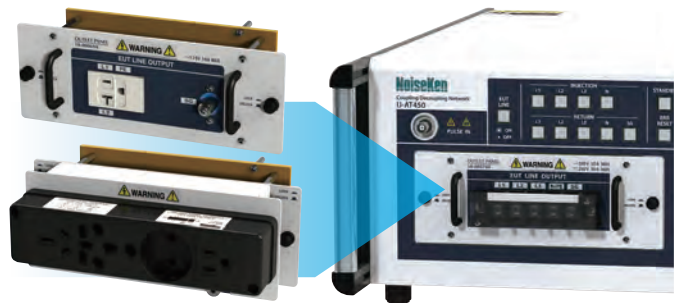

Remote control Testing automation reduces testing time and man-hours

Using remote control software, in addition to test parameters such as pulse output voltage, pulse width, polarity, and repetition period, the application mode (common/normal) and applied phase can be set, and the test conditions can be controlled in sequence. This reduces the time and effort required to change the wiring during testing and contributes to shortening the testing time and reducing the number of man-hours.

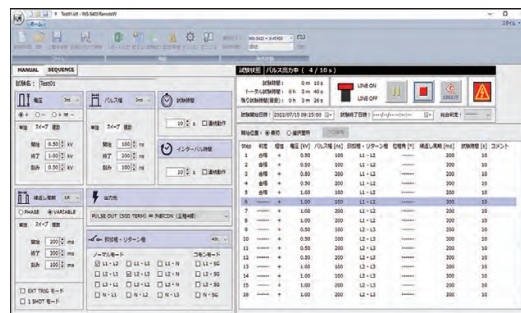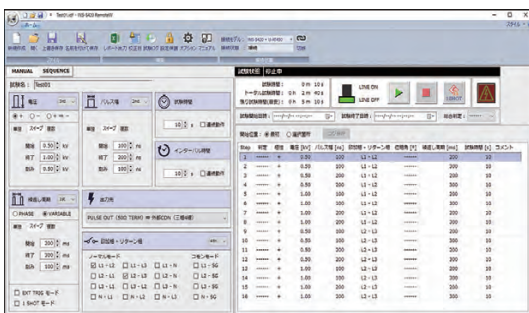

INS-S420 Remote Control Software

INS-S420 RemoteW Model:14-00062A

INS-S420 RemoteW (Model: 14-00062A) is a dedicated software for remote control of INS-S420 or INS-S420 & IJ-AT450.


Using this software, you can set the application mode as well as test parameters such as pulse output voltage, pulse width, phase angle and repetition period. Test conditions can be controlled in sequences, which contributes to reducing the test time and man-hours.

- Manual tests can be performed by setting test parameters such as pulse output voltage, pulse width, phase angle, repetition period, and test time.
- Sequence tests can be performed by arbitrarily combining manual test data.
- Test information such as test conditions, test list, etc. can be generated into a Test Report and exported in Excel format.
- EUT FAIL signal detected using digital I/O.
- Compatible with Windows 10,11 64 bit versions with English and Japanese supported languages.
- Various settings data can be protected by the "Settings Protection" function.

Hardware Configuration


【PC Remote control of INS-S420】

Allows controlling the pulse output voltage, pulse width, phase angle and repetition period of the Simulator's main unit, however application phase and return phase switch control is not available.

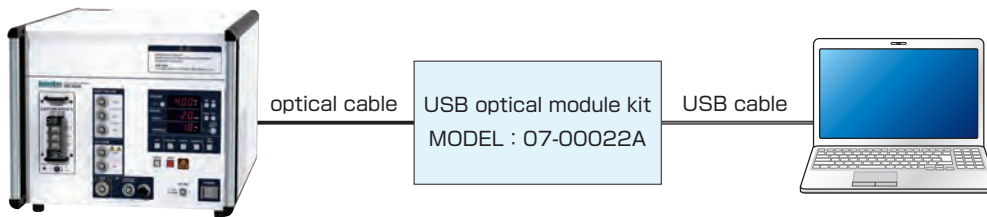

【PC Remote control of INS-S420 & IJ-AT450】

Allows controlling the pulse output voltage, pulse width, phase angle and repetition period of the Simulator's main unit, and also application phase and return phase switching and EUT LINE ON/OFF control is available.

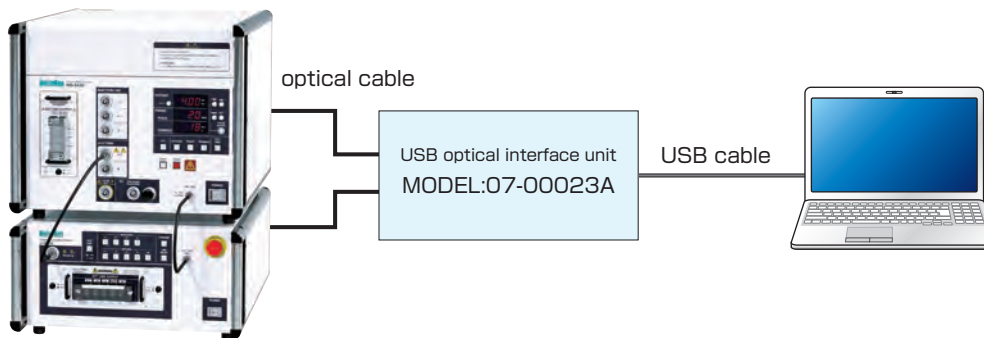

Software System Requirements

Parameter	Specifications
OS	Windows 10, 64bit (English or Japanese ver.) Windows 11, 64bit (English or Japanese ver.)
CPU	Dual-Core over 2.4GHz or better recommended
RAM	8GB or more recommended
Storage	5GB available free space
Display	1920×1080 pixels (FullHD) or more recommended

【Attention】

- Operation is not guaranteed when using software on cloud services or using online storages.
- For correct "Report Export" function, be sure to have installed Microsoft Excel compatible with the OS and within the support period. (Please use the Desktop version, not the Store App version.)
- Optical USB Interface unit is required (models 07-00022A or 07-00023A).
- Available USB ports required.
- (2 USB ports required. In case of using Digital I/O - 3 USB ports required.)
- CD-ROM or DVD-ROM drive required for installing drivers for the Optical USB Interface.

14-00062A


Remote Control Software

Manual Test

Settings Screen


* Software English version available

Run Screen

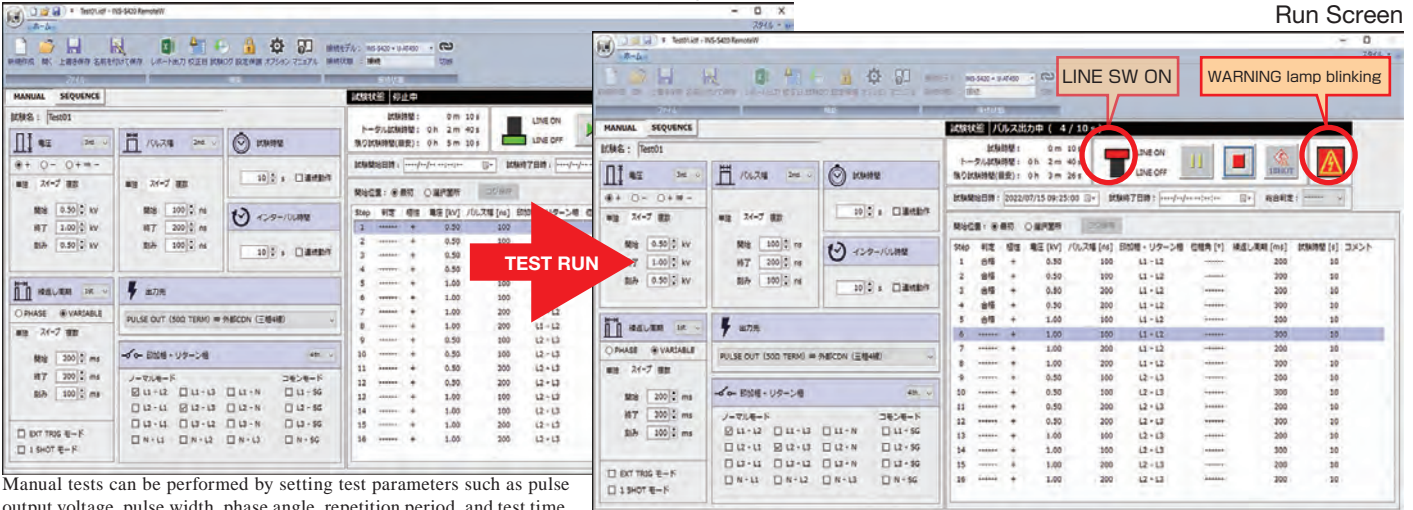


Manual tests can be performed by setting test parameters such as pulse output voltage, pulse width, phase angle, repetition period, and test time.

Sequence Test

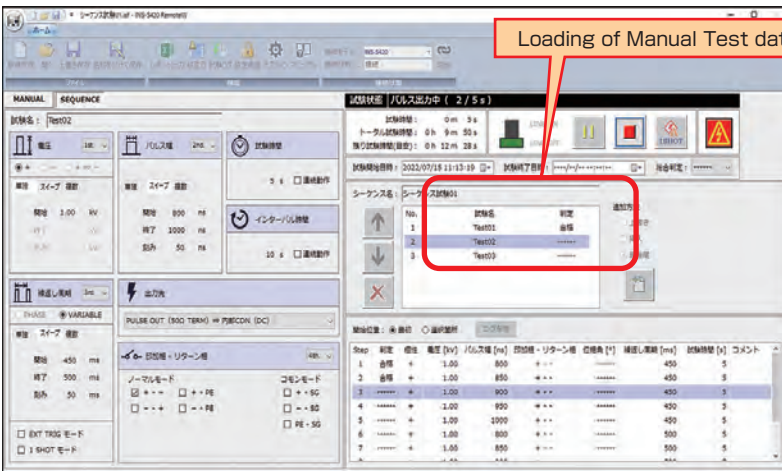


Sequence tests can be performed by arbitrarily combining manual test data.

Sweep Function

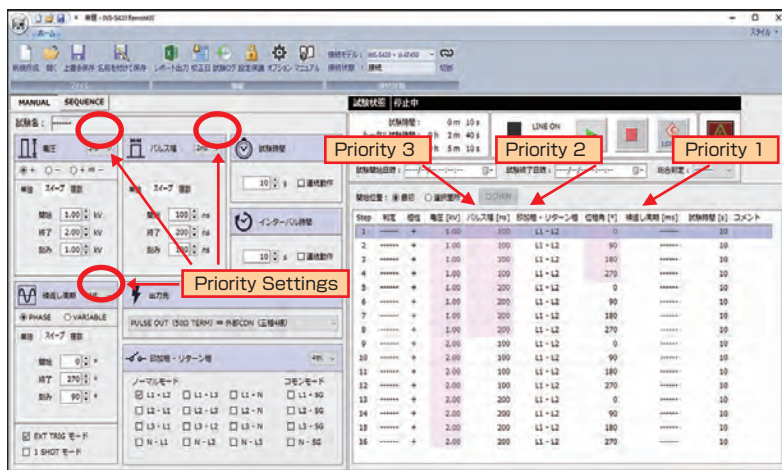

Sweep test with priorities set for test parameters is available.

Report Generation

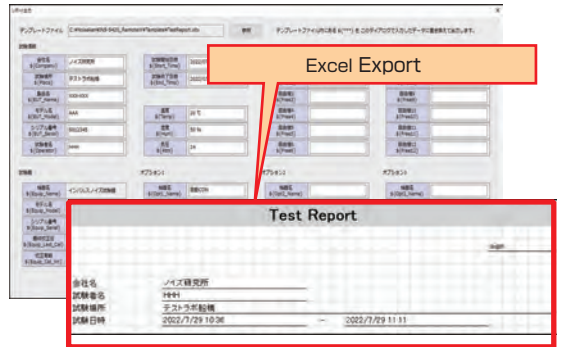


Test information such as test conditions, test list, etc. can be generated into a Test Report and exported in Excel format. Test Report can be set to a desired format by loading a template file.

EUT FAIL signal detection function



By using a digital I/O by National Instruments, you can detect up to 8 EUT FAIL signals and you can set the operation and judgment when EUT FAIL signals are detected. Please contact us for more details.



Options

Noise Simulator
INS

Attenuator for waveform check MODEL : 00-00017A



Attenuator for measuring high voltage pulse.

Parameter	Specifications
Attenuation rate	DC~2GHz:40dB (100:1)
Input pulse peak voltage	4000V MAX
Tolerable continuous pulse examples	Pulse width : 50ns~1000ns Pulse repetition frequency : Max. 60Hz at 4000V output; Max. 100Hz at 2000V 1 hour continuous use
Input impedance	50Ω (50Ω ± 1% at DC)
Output impedance	50Ω (50Ω ± 1% at DC) *If using an oscilloscope with high input impedance (1 MΩ), a 50 Ω termination is required.
Interface connectors	INPUT:HN(F) OUTPUT:N(F)
Dimensions/ Weight	(W)154.5mm×(D)105mm×(H)37mm / Approx 1350g
Accessories	Input cable (HN(P)-NMHV(P) 0.5m) 1pc., Output cable (N(P)-BNC(P) 1m) 1pc., Instruction Manual 1pc.

Attenuator MODEL : 00-00011A



Attenuator for protecting measuring instruments.

It is recommend to use this attenuator when using the waveform checking attenuator (00-00017A) to protect measuring instrument.

Attenuating rate 20dB, N type connector INS-S220/S420 → coaxial cable → 00-00017A → 0000011A → coaxial cable → oscilloscope

PULSE DIVIDER for INS MODEL : 00-00021A



Voltage divider enabling low voltage test by dividing and outputting high voltage pulses at a ratio of 4:1.

Parameter	Specifications
Attenuation rate	DC~2GHz : 12dB (4 : 1)
Input pulse peak voltage	2000V MAX
Tolerable continuous pulse examples	Pulse width : 10ns~1000ns Pulse repetition frequency :2000V output ≤ 62.5Hz (continuous output)
Input / Output impedance	50Ω (50Ω ± 1% at DC)
Interface connectors	HN(F)
Dimensions / Weight	(W)169mm×(D)119mm×(H)37mm / Approx 1490g
Accessories	I/O cables (HN(P)-NMHV(P) 0.5m) 2pcs., Output cable (HN(P)-HN(P) 0.3m) 1pc., Instruction Manual 1pc.


Outlet Panel MODEL : 18-00059C/60B/84A



Outlet panel to be available for different types of connectors in line output of INS-S220 / S420.

Model	Specifications
18-00059C	JP/USA Type AC125V 16A MAX
18-00060B	CEE Type AC240V 16A MAX
18-00084A	multi outlet type AC250V 16A MAX

Outlet Panel MODEL : 18-00069A/71A

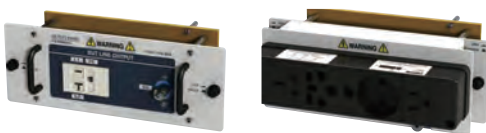

Outlet panel for converting the line output connector IJ-AT450


Model	Specification
18-00069A	JP/USAType AC125V 16A MAX
18-00071A	multi outlet type

Coupling Adaptor MODEL : 15-00014A



Allows noise application combined with an Impulse Noise Simulator by simply inserting a cable of an electronic device. Calibration fixture (15-00015A) for this clamp is also available.

- Allows to injecting the noise without cutting signal, DC, AC, GND, etc.
- Allows to test noise immunity of electric devices separately.
- Allows highly-effective noise immunity testing since the noise can be injected directly to signal lines.



Parameter	Specifications
Input voltage	4000V Max
Input pulse width	50~1000ns
Coupling method	Capacitive coupling
Dimensions / Weight	(W)386×(H)155×(D)140mm (protrusions excluded) / Approx 4kg
Adequate cable dimensions	maximum diameter 20mm
Terminal resistor	N/A
Coaxial connectors	Coaxial cable NMHV(P)-NMHV(P)-1.5M 2pcs

Coupling Adaptor MODEL : CA-805B (Capacitive coupling)



Allows noise application combined with an Impulse Noise Simulator by simply inserting a cable of an electronic device.

- Allows injecting the noise without cutting signal, DC, AC, GND, etc.
- Allows to test noise immunity of electric devices separately.
- Allows highly-effective noise immunity testing since the noise can be injected directly to signal lines.
- Allows to clamp bundle of lines whose of maximum diameter up to 26mm.




Parameter	Specifications
Input voltage	4000V MAX
Input pulse width	50~1000ns
Coupling method	Capacitive coupling
Dimensions / Weight	(W)350×(H)105×(D)110mm (protrusions excluded) / Approx 3kg
Adequate cable dimensions	maximum diameter 26mm
Terminal resistor	N/A
Coaxial connectors	Coaxial cable NMHV(P)-NMHV(P)-1.5M 2pcs (MODEL 02-00025A)

Coupling Adaptor MODEL : 15-00007A (CA-806 / Magnetic field coupling)



Allows noise application combined with an Impulse Noise Simulator by simply inserting a cable of an electronic device.

- Allows injecting the noise without cutting signal, DC, AC, GND, etc.
- Allows to test noise tolerance of electric devices separately.
- Termination resistance built-in.




Parameter	Specifications
Structure	Magnetic field coupling noise injection clamp
Input voltage	2000V Max.
Input pulse width	50~1000ns
Coupling ratio	1/10±10% of input voltage
Termination resistance	50Ω built-in(54Ω)
Max. diameter of ground cable	27mm
Dimensions / Weight	(W)89×(H)64×(D)120mm / Approx 1000g
Coaxial connector	NMHV(P)-NMHV(P) 1m: 1pc. (MODEL: 02-00053A)

EMS Probe Kit MODEL : H2-B



Probes for noise injection onto PCB patterns and flat cables using the Impulse Noise Simulator. By choosing different probes, it is possible to separate the electric field/magnetic field and perform near field irradiation. * Max. pulse voltage: 1kV, max. pulse width: 50ns, fastest repetition period: 10 ms)

- Noise can be applied to any part of a PCB or harness.
- Allows to detect noise immunity weak points by separating and combining use of electric/magnetic field probes.
- A set of 3 electric field probes and 3 magnetic field probes with different shapes and sizes.
- Noise can be applied in the range of several millimeters, allowing to easily identify weak points.
- Allows to identify weak points for specific frequencies by using a signal generator as a wave source.
- Suited for locating noise sensitive spots by using with the INS or FNS equipment



BS05DB



ES02




ES00



ES05D



BS02

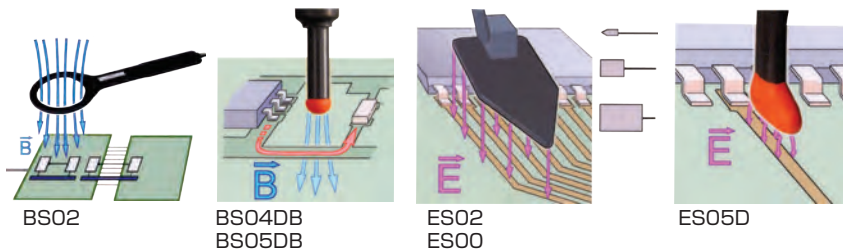

Options

Noise Injection Probe MODEL : 01-00034A



A probe for injecting noise directly into the pattern and parts of the printed circuit board.


*Input pulse repetition period: 10 ms or more

- Noise immunity can be tested at the board level because noise can be injected directly into each pin of the LSI.
- Up to 500V noise injection is possible utilizing INS or FNS simulator.
- Possible to exchange the coupling capacitor (Option)
- 50 ohm termination resistor built-in

[Options]

Coupling capacitors: 06-00039A 220pF. 06-00040A 330pF. 06-00041A 3pF. 06-00042A 500pF.

* 01-00034A does not include the coupling capacitors

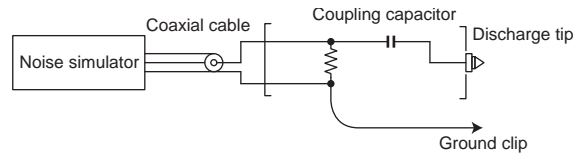


Radiation Probes MODEL : 01-00006A / 7A / 8A / 9A / 10A / 31A / 50A




These probes, in combination with Impulse Noise Simulator allow to emit electromagnetic field radiation noise to the wiring of PCB inside electronic equipment, and is used to search for areas vulnerable to radiation noise.

Parameter	Specifications
Input voltage	4000V Max
Input pulse width	50~1000ns (1μs)
Loop diameter	01-00006A : φ50mm, 01-00007A : φ75mm, 01-00008A : φ100mm, 01-00009A : φ150mm, 01-00010A : φ200mm, 01-00031A : 250mm, 01-00050A : 30mm
Cable length	Approx.2m
Weight	Approx.180g~220g
Termination Resistance	N/A


Probes application examples

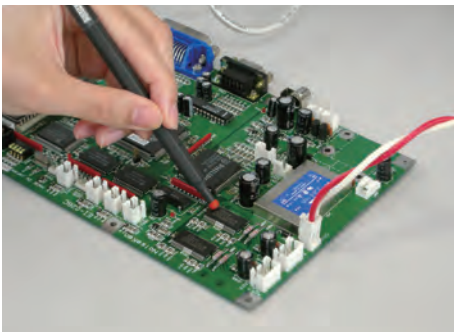

H2-B

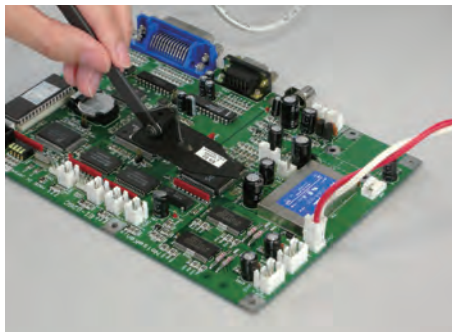


H2-B

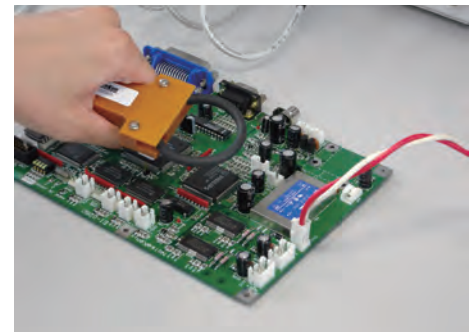


Radiation probe



Noise injection probe

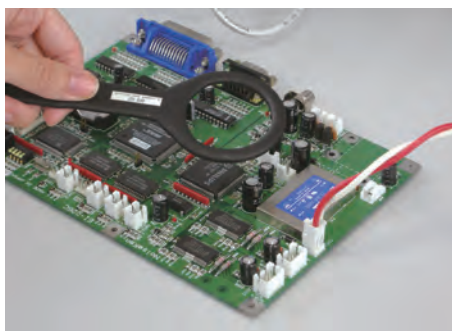

H2-B

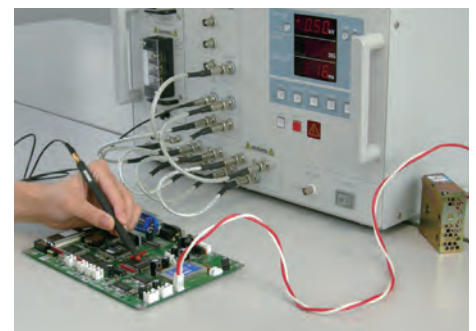

H2-B

Pulse Injection Cable MODEL : 02-H1834




This cable is used for direct noise injection in combination with an Impulse Noise Simulator.

* It cannot be used for applying current to places where current flows, such as power lines.

INS Direct Injection Capacitor MODEL : 01-00047A



A unit for directly applying the pulse output of the Impulse Noise Simulator without passing through the simulator's internal CDN. A coupling capacitor same with the CDN is built-in. It can be used when the power supply capacity of the test product is a weak current such as a DC5V line, and when it cannot be energized when passing through the simulator's CDN.

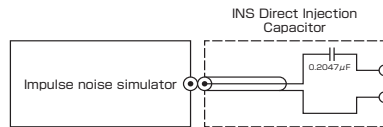

Item	Specifications
Coaxial connector	NMHV
Connector	M6 ring crimp terminals
Dimensions / weight	80×80×150 mm (protrusions excluded) / 400g

Injection Unit MODEL : IJ-4050



Unit allowing noise injection to power supply lines of EUT up to 3-phase 5 lines (L1, L2, L3, N, PE) in combination with main units of INS series. Setting for Normal mode and Common mode is simple and easy with change of the connectors configurations.

In case of the combination with INS-4020 / 4040 / S220, test synchronized with EUT lines can be conducted.

Parameter	Specifications
Input impulse voltage	Max. 8kV without 50Ω termination Max. 4kV with 50Ω termination
EUT power capacity	3-phase 5 lines (L1, L2, L3, N, PE) AC415V 50A (Unavailable for DC) AC415V between L1-L2, L2-L3, L3-L1 AC240V between L1, L2, L3 - N
Injection phase switching	By coaxial connectors L1, L2, L3, N, PE
Coupling modes	Normal / Common (Setting with short plug connection)
Zero cross detection	Detects between L1 - L2 and outputs the synchronization signal from SYNC OUT terminal
EUT line protection circuit	Detects current in L1, L2 and L3 lines and breaks L1, L2, L3 and N lines
EUT line input terminal	Terminal block, screw connection
EUT line output terminal	Exclusive contact for φ6
Coupling Attenuation characteristics	≤-10db 10kHz-1GHz without load
Residual voltage at input	≤450V Residual voltage without load when 4000V impulse is injected with 50Ω termination
Termination resistance	N/A (Termination resistance in Impulse Noise Simulator is applied)
Power supply	AC100V-240V±10% 50 / 60Hz 20VA Max
Operating temperature / humidity range	15~35°C 25~75%
Dimensions / Weight	(W)430×(H)199×(D)535mm (Protrusions excluded) / Approx 25kg

Injection Unit MODEL : IJ-5100Z



Unit allowing noise injection to power supply lines of EUT up to AC480V / 100A 3-phase 5 lines (L1, L2, L3, N, PE) in combination with main units of INS series. In case of the combination with INS-4020 / 4040 / S220, test synchronized with EUT lines can be conducted.

Parameter	Specifications
Input impulse voltage	Max. 8kV without 50Ω termination Max. 4kV with 50Ω termination
EUT Line	3-phase 5 lines (L1, L2, L3, N, PE)
Maximum voltage of EUT line	AC 480V
Maximum current of EUT line	100A
Line synchronization output	1/2 of EUT line input voltage
Through characteristics	within -10db in 10kHz-1GHz
CDN power supply	AC 100~240V ±10% 50 / 60Hz
Dimensions / Weight	(W)488×(H)520×(D)825mm (Protrusions included) / Approx 115kg

Circuit Breaker Box MODEL : 18-00072A (20A) / 18-00073A (50A)



A breaker box allowing to cut off the line between the Simulator and the power supply side by using it in combination with the INS-S220/S420/IJ-4050/AT450.* Connection requires processing of the connection cable. Contact us for more details.

Parameter	Specifications (18-00072A)	Specifications (18-00073A)
Rated Voltage	AC250V 50/60Hz DC65V	AC240/415V 3 phase 4 wire Y-connection, 50/60Hz AC240V : Line-N (neutral) AC415V : Line-Line
Rated Current	20A	50A
Switching durability	over 10,000 times (rated open/close 6,000 times, no load open/close 4,000 times, frequency 6 times/minute)	
Neutral pole (N pole)	N/A	The neutral pole does not trip by itself. The neutral pole does not open before the other poles and does not close after the other poles.
Operating temperature, humidity	15 ~ 35°C 25 ~ 75% (no condensation)	
Dimensions	(W)180×(H)92×(D)100mm (excluding protrusions)	(W)180×(H)92×(D)120mm (excluding protrusions)
Weight	0.75 kg	1.2kg

Options

Isolation Transformer MODEL : TF-2302P

Model TF-2302P is a single-phase isolation transformer rated AC240V/30A with dielectric strength of 4kV. For safety reasons, an isolation transformer is indispensable for AC powered testing for equipment.



Parameter	Specifications
Maximum input voltage	Single phase AC240V Max (50/60Hz)
Maximum output current	30A Max
Dielectric strength	Primary winding to core AC4kV (1 minute) Secondary winding to core AC4kV (1 minute) Primary to secondary windings AC4kV (1 minute)
Insulation resistance	100MΩ or more at DC500V
Dimensions / Weight	(W)350×(H)475×(D)400mm (Except for eye bolt and handle) / Approx. 60kg
Accessories	AC single phase line input cable (5.5sq 3-line 3m, One end: with a stick-type soldering terminal, The other end: without terminal): 1pc., PE/FG cable (3.5sq 3m Both ends: with a φ6 ring-type soldering terminal) : 1pc. Instruction Manual: 1pc. AC single phase line output cable (3.5sq 3-line 2m, One end: with stick-type soldering terminal, The other end: with a φ5 ring-type soldering terminal): 1pc.

Isolation Transformer MODEL : TF-6503P, TF-6633P

Model TF-6503P, TF-6633P are three-phase isolation transformers rated AC 600 V / 50 A (TF-6633P 63A) and dielectric strength of 4 kV. For safety reasons, an isolation transformer is indispensable for AC powered testing for equipment.



Parameter	TF-6503P Specifications	TF-6633P Specifications
Maximum input voltage	Single / Three phase AC 600 V Max (50/60 Hz)	
Transformer wiring method	Star wiring	
Maximum output current	50 A Max	63 A Max
Dielectric strength	Primary winding to core AC 4 kV (1 minute) Secondary winding to core AC 4 kV (1 minute) Primary to secondary windings AC 4 kV (1 minute)	
Insulation resistance	100 MΩ or more at DC 500 V	
Dimensions / Weight	TF-6503P: (W)500×(H)640×(D)700mm (Eye bolts and handles excluded) approx. 350kg TF-6633P: (W)500×(H)661×(D)700mm (Eye bolts and handles excluded) approx. 400kg	
Accessories	AC three-phase line input cable (14sq (22sq for TF-6633P) 4-line 3m, One end: with a stick-type soldering terminal, the other end: without terminal):1 pc. PE cable (8sq 3m, One end: with a φ6 ring-type soldering terminal, The other end: without terminal): 1 pc. PE/FG cable (8sq 3m Both ends: with a φ6 ring-type soldering terminal): 1 pc. Instruction Manual: 1 pc. AC three phase line output cable (14sq (22sq for TF-6633P) 4-line 2m, One end: with stick-type soldering terminal, The other end: with a φ5 ring-type soldering terminal): 1pc. PE cable (8sq 2m, One end: with a φ6 ring-type soldering terminal, The other end: with a φ5 ring-type soldering terminal): 1pc.	

Noise Canceller Transformers NCT series

These series have excellent attenuation characteristics for impulse noises. Used for line input insulation during impulse noise testing.



MODEL	Primary / Secondary Voltage	Rated current	Frequency
NCT-160	120V	5A	50/60Hz
NCT-1240		20A	
NCT-2240	240V	10A	


Line input cable MODEL : 05-00160A Line output cable MODEL : 05-00161A

The connection cable between noise impulse simulator and noise canceller transformer on primary winding. Please inquiry us for details.



Description	MODEL	Specifications
Line input cable	05-00160A	Single phase 20A, 3m Cabtyre cable, Ring terminal end - Stripped end (termination at the customer's side)
Line output cable	05-00161A	Single phase 20A, 2m Cabtyre cable, Ring terminal end - Ring terminal end

Options

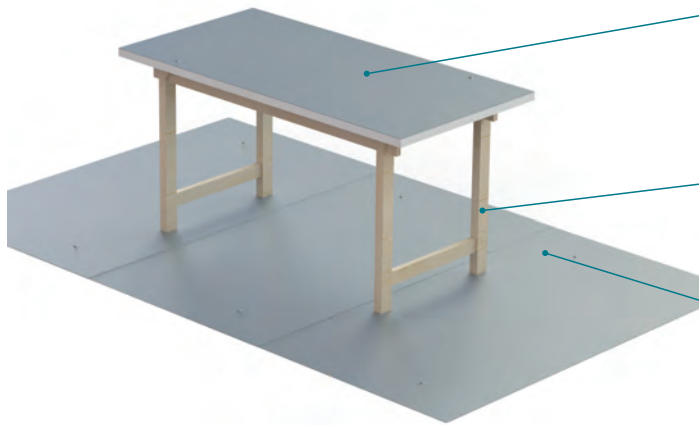**Horizontal Coupling Plane (HCP) MODEL : 03-00020A**

Metal plate placed on the table for the testing of tabletop EUT.
(W)1600 × (D)800 × (t)1.5 mm × 1 sheet (made of Aluminum)
* Used as a horizontal coupling plane in ESD testing and also can be used as a ground plane

Test Table MODEL : 03-00039A

Wooden table to be used for the test to equipment (EUT) and devices under test (DUT).
(W)1600 × (H)800 × (D)800 mm

Ground Reference Plane (GRP) MODEL : 03-00007A

Ground plane to be placed under the wooden table.
(W)1800 × (D)1000 × (t)1.5 mm × 3 pcs. in 1 set (made of aluminum)

Insulating Block MODEL : 03-00054A

Blocks to float (isolate) wirings of EUT from GRP.
(W)300 × (D)300 × (H)50mm, 5 pcs. in 1 set

Material: Polyethylene foam

Insulating support MODEL : 03-00024A

Used for floating EUT 10cm above the ground plane in case of testing to floor-standing EUTs.

Size : (W)1200 × (D)1200 × (H)100mm
Material : Wooden
Withstanding load : 500kg

Cubic Insulating Block100 MODEL : 03-00029A

Used for floating EUT 10cm above the ground plane in case of testing to floor-standing EUTs.

Size : (W)100 × (D)100 × (H)100mm
Material : Wood
Withstanding load: 500kg
4 pcs per set


SG Cable MODEL : 05-00103A

Braided wire cable to connect between SG terminal of the main unit and the ground reference plane.

Length : 0.1m

USB Optical Module Kit MODEL : 07-00022A

Connection adapter used for remotely controlling the simulator from a PC.
Equipped with USB-Optical conversion fiber optic cable (5m)

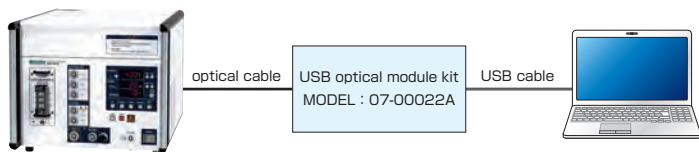

[PC control image of INS-S420 only]


Allows controlling the pulse output voltage, pulse width, phase angle and repetition period of the Simulator's main unit, however application phase and return phase switch control is not available.

SG Connection Plate MODEL : 03-00112A

Metal plate connecting simulator's SG and ground plane. Screw attaching to the Ground Plane is not required contributing to simulator's mobility.
*for INS-S220/S420

USB optical interface unit MODEL : 07-00023A

Connection adapter used for remotely controlling the simulator from a PC. Equipped with USB-Optical conversion fiber cables 5m x 4 (ch)

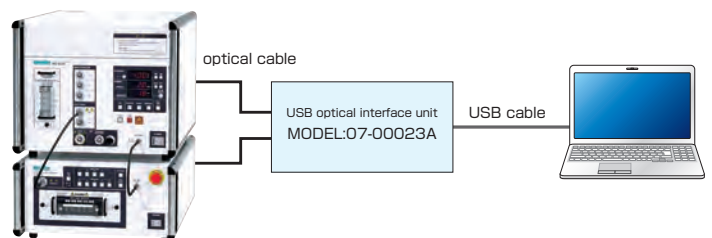

[PC control image of both INS-S420 and IJ-AT450]


Allows controlling the pulse output voltage, pulse width, phase angle and repetition period of the Simulator's main unit, and also application phase and return phase switching is available.

Impulse Noise Test Overview

(Square Wave) Impulse Noise Test Method


Power supply lines test method

- ① Connect the power supply line for EUT to EUT LINE INPUT on the simulator main unit (hereafter referred to as the Main Unit) through an isolation transformer.
- ② Lay a ground plane and insulation sheet under the main unit and the EUT, and ground the ground plane for safety.
- ③ Connect the power supply cable of EUT to the main unit (fold and bind the cable to shorten it if too long)
- ④ In the common mode test, connect the SG short plug, and connect the SG terminal of the main unit and the ground plane as well as the FG terminal of the EUT (if there is a terminal) and the ground plane with a short and reliable braided wire with low impedance for high frequencies.
- ⑤ Connect 50Ω TERM OUT connector to connector of phase (L1 or L2, PE if necessary) the noise is intended to be injected with coaxial cable.

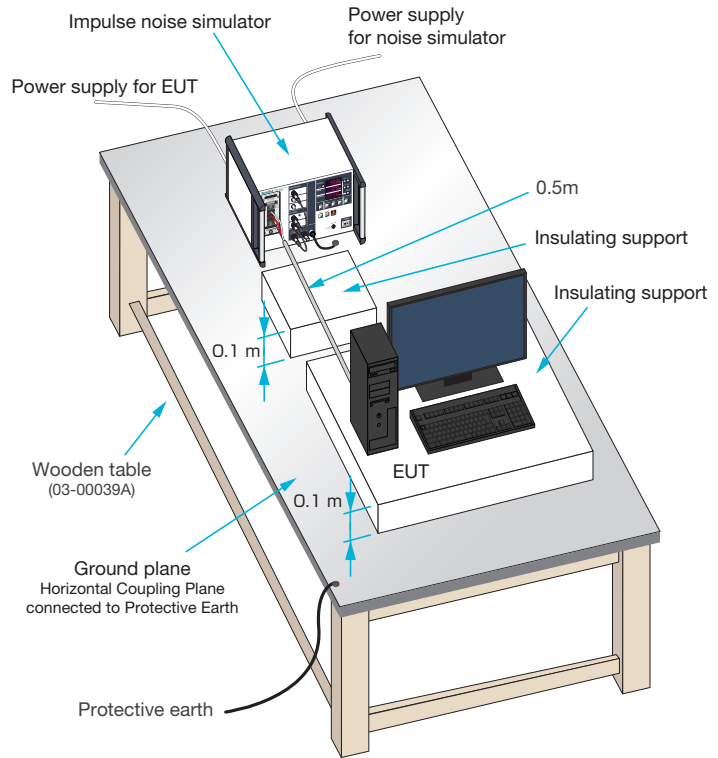

Interconnection lines test method

- ① Lay a ground plane and insulation sheet under the main unit and the EUT, and ground the ground plane for safety.
- ② Open the coupling adaptor 15-00014A (option) and clamp interface cable with the adaptor. Connect connector of the adaptor to PULSE OUT of the main unit. Connect the other connector of the adaptor to 50Ω TERM IN of the main unit.
- ③ Connect power supply cable of EUT to any power source since no high voltage pulse is injected in this test.
- ④ Connect the Main Unit's SG terminal and FG terminal of EUT to the ground plane.

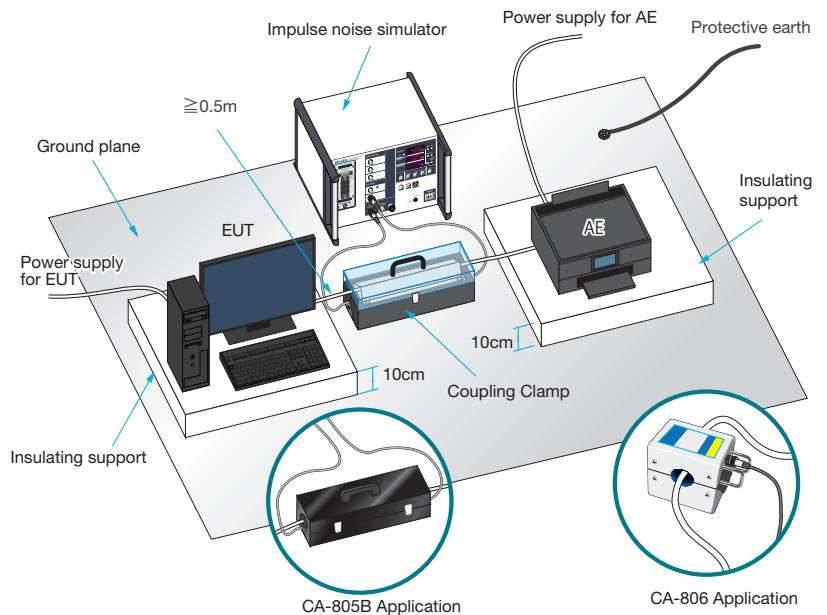

Impulse Noise Test Overview


WAVEFORM OBSERVATION

Waveform observation using the 00-00017A attenuator for waveform observation.


- ① Connect the PULSE OUT of the Main Unit and the input connector of the 00-00017A waveform observation attenuator with the (HN(P)-NMHV(P)) coaxial cable included with the 00-00017A waveform observation attenuator. Connect the output connector of 00-00017A and the included coaxial cable (N(P)-BNC(P)) to the input of the oscilloscope. If necessary, insert an attenuator between them.
- ② The output impedance of 00-00017A is 50Ω , so set the oscilloscope input to 50Ω termination.
- ③ Start the Main Unit.

-Reference- The reason to use an attenuator if necessary


The impedance of the Main Unit is 50Ω . Since the load resistance of 00-00017A is also 50Ω , if the voltage is set to $4,000\text{V}$, then $4000\text{V} \times (50\Omega/50\Omega+50\Omega) = 2000\text{V}$ output can be confirmed, and the attenuated by 00-00017A voltage of 20V is input to the oscilloscope. Some oscilloscopes cannot accept 20V input when measuring with 50Ω termination, so it is necessary to insert a 20dB attenuator for further attenuation. (In this case, the input is $20\text{V} \rightarrow 2\text{V}$ due to the attenuation ratio of 10:1)

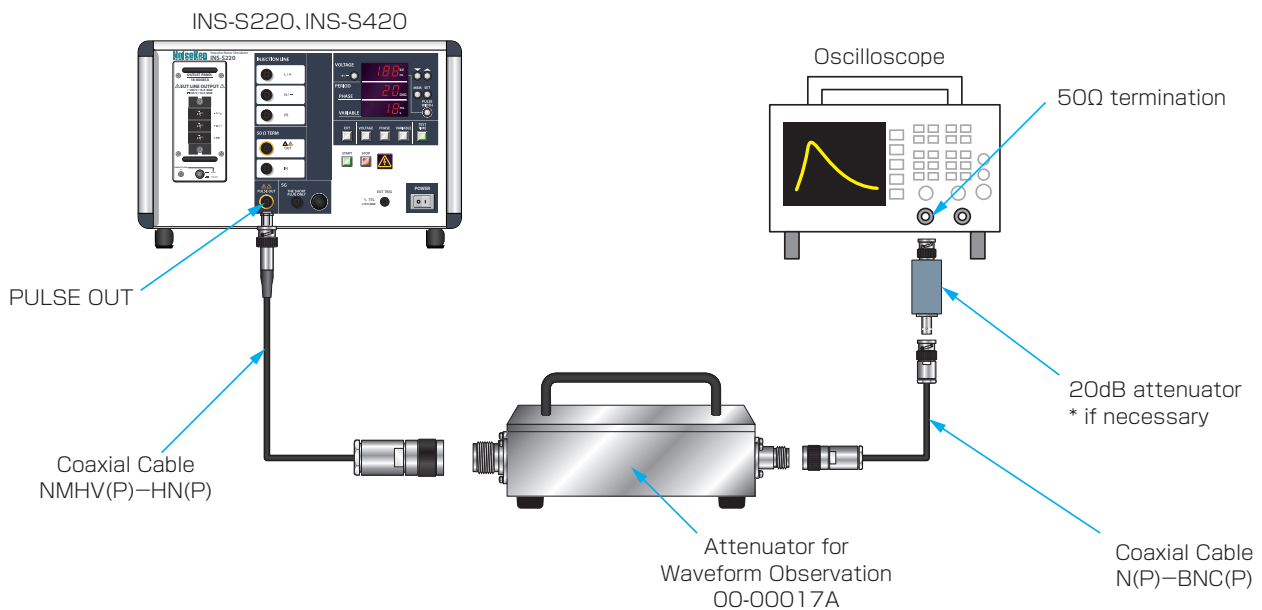

Output waveform image

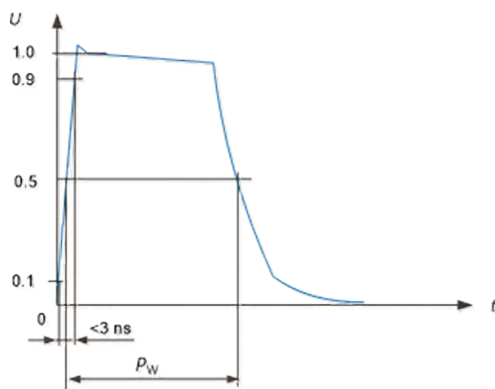

Output waveform (rise time and PW specification)

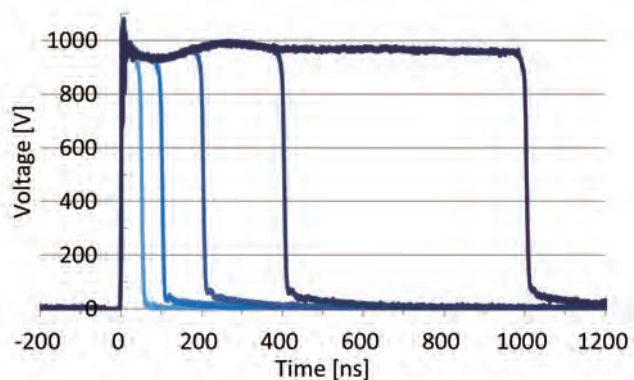

Output waveform (50ns, 100ns, 200ns, 400ns, 1000ns)

Fast transient / burst simulator

FNS-AX4-A20/B63

It is compact and equipped with new functions to make EMC testing easier

It is a tester that evaluates the resistance of electronic devices by simulating high-frequency noise that rises quickly due to discharge between contacts of switching devices and arc discharge generated from electronic motors.

- IEC 61000-4-4 Ed.3 standard compliance.
- Pre-check function equipped, making inspection before testing easier.
- Normal mode test support for testing for real field troubles. (option)
- Utilize an outlet box that simplifies EUT connection. (option)
- Compared with conventional products, the size has become compact. (Approximately 67% by volume)
- Easy to understand Panel display reduces mistakes in connecting power cables.
- Windows compatible software control. (option)
- Next calibration date notification. (Windows software only)
- LCD screen with multi-language support and enhanced operability.
- Maximum output voltage of 5 kV and maximum pulse frequency of 2 MHz allowing to test above the standard test level.
- CDN capacity is increased to single phase type AC 240 V 20 A, single and three phase type to AC 600 V 63 A, supporting a wider range of EUTs.
- Large capacity CDN (100 A or 150 A) option available for Injection test on various EUTs.
- Using coupling clamps and EMS probe kit allows to test signal lines and evaluate noise immunity on PCBs. (option)



EFT/B FNS

Specifications

■ Generator specifications

Parameter	Specification / Function
Output voltage	200 to 5000 V 10 V Step
Polarity	Positive or negative, polarity alternation possible per burst
Repetition frequency	0.1 kHz to 2000 kHz 0.1 kHz to 1 kHz / 0.01 kHz step Tolerance $\pm 5\%$, 1.0 kHz to 10 kHz / 0.1 kHz step Tolerance $\pm 5\%$ 10 kHz to 100 kHz / 1 kHz step Tolerance $\pm 5\%$, 100 kHz to 1000 kHz / 10 kHz step Tolerance $\pm 5\%$ 1000 kHz to 2000 kHz / 100 kHz step Tolerance $\pm 10\%$, (Limitation per voltage levels when continuous output)
Number of pulses	1 to 1000 at a step of 1 pulse, Setting limit: 1 pulse per ms in a burst (repetition frequency 1 kHz or more)
Burst duration	Formula for Burst duration = Pulse number / Repetition Frequency Scope of manually setting value for burst duration: 0.01 to 999 ms
Burst period	10 to 1000ms $\pm 10\%$ 10ms steps (500ms or more for polarity alternate mode)
Polarity alternate function	Output polarity alternated between positive and negative at each burst period Setting condition: the burst period is 500ms or more and the burst pause period [(burst period) - (burst duration)] is 100ms or more Maximum test time: 10 minutes
Continuous Pulse output	Up to 1000 V -10 kHz or less, to 2000 V -4 kHz or less, to 5000 V -1 kHz or less. Maximum test time for each case: 10 min
Frequency modulation	Frequency is shifted continuously between set frequency and approximately -10% from the set frequency. The modulating wave is triangular wave of approximately 20Hz
External trigger	External trigger input invokes 1 burst output in synchronization with the trigger input. Trigger specification: Hi (+ 5V) \rightarrow Lo (0 V) triggers one burst period.
Pulse waveform (at 50 Ω load)	Pulse peak voltage: (set voltage / 2) $\pm 10\%$ Rise time: 5 ns $\pm 30\%$ Pulse width: 50 ns $\pm 30\%$
Pulse waveform (at 1 k Ω load)	Pulse peak voltage: (set voltage \times 0.95) $\pm 20\%$ Rise time: 5 ns $\pm 30\%$ Pulse width: 35 to 150 ns
DC blocking capacitor	10nF $\pm 20\%$

■ CDN specifications

Parameter	Specification / Function
Power capacity	A 20 model: single phase AC 240 V / 20 A, DC 125 V / 20 A (10 A for PE) B 63 model: three-phase AC 600 V / 63 A, DC 125 V / 63 A (10 A for N / PE)
Applied phase	A20 model: L / N / PE B63 model: L1 / L2 / L3 / N / PE Single line or all lines can be specified individually for each phase
Injection mode	Common mode (Normal mode available using option)
EUT Line input/output	ϕ 6 mm safety socket
Coupling capacitor	33 nF
Output waveform specification	Pulse peak voltage: (set voltage) / 2 $\pm 10\%$ Rise time: 5.5 ns ± 1.5 ns Pulse width: 45 ns ± 15 ns Set voltage ± 4000 V, frequency specified from 5 kHz to 100 kHz
Input residual voltage	10% or less of setting pulse voltage EUT line input is 50 Ω termination, line output is defined as open
AC Line Sync	Synchronous and asynchronous setting available. Setting phase angle: 0 to 360 $^{\circ}$ $\pm 10^{\circ}$ 1 $^{\circ}$ Step Synchronizable voltage: AC 85 V to rated voltage Reference phase: between L-N (A20 model), L1-L2 (B63 model)

■ Other specifications

Parameter	Specification / Function
Emergency stop	Push lock type switch (Test stop, EUT line OFF)
EUT FAIL function	FAIL signal from external (Hi \rightarrow Lo) detected during test FAIL signal specifications VLO: 0 V, VHI: + 5 V Choose operation from test stop / pause when triggered 3 channels available for the FAIL input
External interface	REMOTE (For external PC control), CDN I/F (For external CDN), INDICATOR (For Warning Lamp or indicator lamp) EUT FAIL INPUT (For temporary pause at EUT failure event)
Accessories	Power Cable, SG Cable, Line Input Cable, Output Cable, Waveform Check Connector, Coaxial Cable, Operation Manual, Accessories bag
Operating environment	Temperature 15 to 35 $^{\circ}$ C Relative humidity 25 to 75%
External Dimensions / Weight	(W)430 \times (H)199 \times (D)370 mm (excluding protrusions) / Approximately 14 kg (A20 model) and 22 kg (B63 model)
Power supply	AC 100 to 240 V $\pm 10\%$ 50/60 Hz approx. 120 VA


FNS-AX4-A20/B63

Operation Screen

■ Operation Screen


In each test mode screen, you can simply push button on/off and simply enter numerical parameters with the numeric keypad. In addition, all test conditions can be set within 1 to 2 screens.

STANDARD mode




The test conditions defined in IEC 61000-4-4 are pre-set. When injected on the power supply, test pulse frequencies are 5 kHz or 100 kHz and voltage selections are 0.5 kV, 1.0 kV, 2.0 kV, 4.0 kV.

MANUAL mode




In the MANUAL mode, detailed test conditions can be set. The pictograms are shown to intuitively understand the setting of the test conditions. From this screen you can switch to the setting screen for conducting the sweep test.

MANUAL mode (Test condition setting)



Polarity and injection phase setting can be easily set by turning the button on/off. Numerical parameters, such as test voltage, etc. can be entered with numeric keypad which appears when necessary for easy number entering.


MANUAL mode (sweep test setting)



It is a test mode in which the condition of output voltage and repetition frequency change can be set to be executed automatically. In the setting example, shows burst voltage change in 100V step from 500V to 1000V. A convenient function for judging the malfunction point of EUT by setting the condition change of output voltage, repetition frequency, polarity, power injection phase, injection phase angle.

■ Screen Configuration

Set either "STANDARD" or "MANUAL" from the menu screen, and make various settings such as test voltage, polarity, frequency, injection phase and so on. "MANUAL" also allows you to set the sweep mode injection. You can save up to 30 test conditions. In "SEQUENCE", you can load the test conditions set in "MANUAL" and combine the test conditions of maximum 18 steps, and create up to 15 programs. You can also pre-check before starting test.

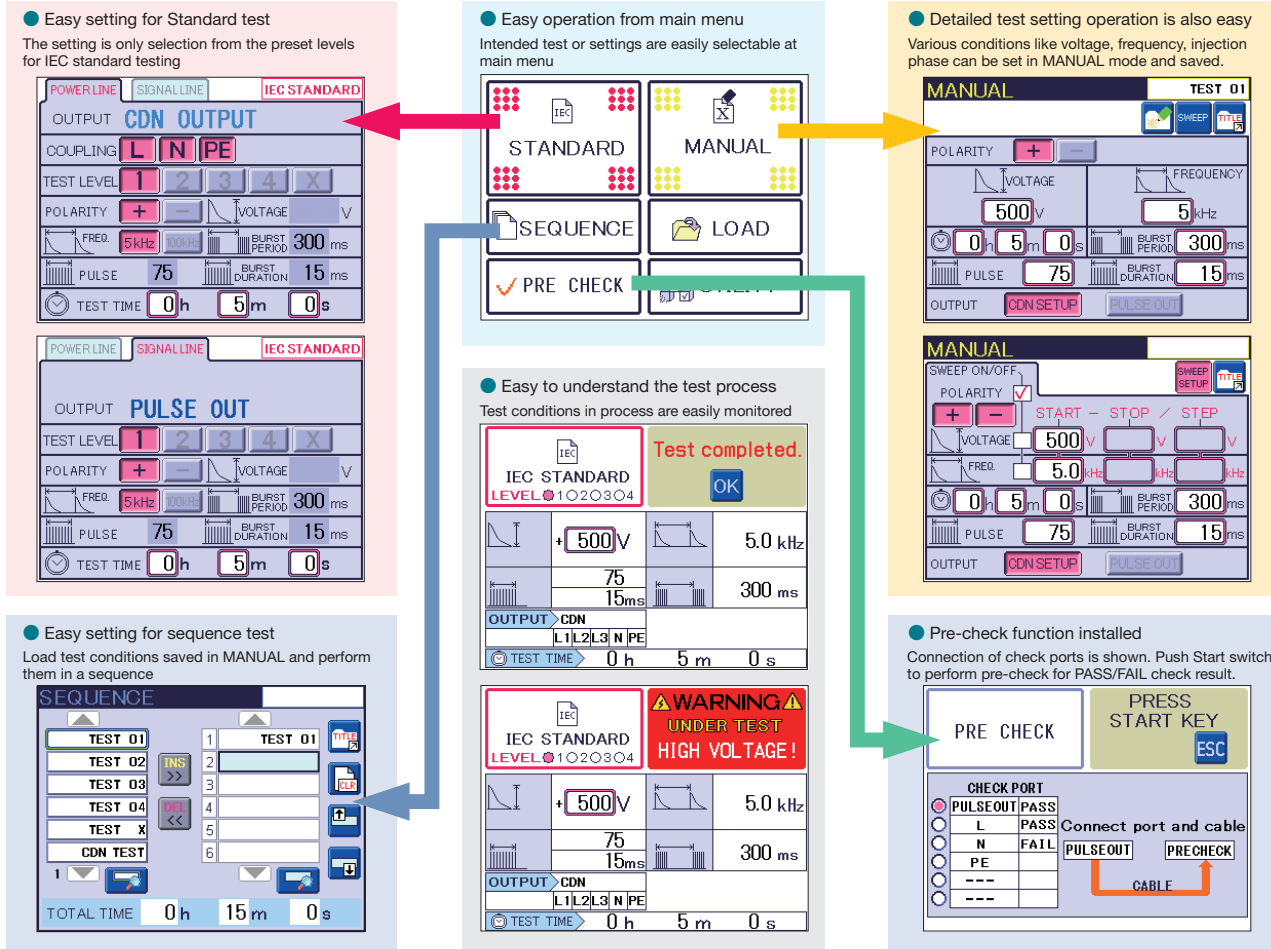

EUT/B FNS

FNS-AX4-A20/B63

Features

Easy to perform pre-test inspection with pre-check function

Built-in monitor circuit for pre-check in the tester body. By simply connecting the waveform observation connector and the attached coaxial cable to the CDN OUT or PULSE OUT of the tester, you can easily check whether the pulse is output normally. You can easily perform pre-start inspection without using a dedicated attenuator or oscilloscope.

* Note: this is not a calibration of the tester.

Connect a cable to a port for pre-check




Check CDN line out




Check of pulse out

Pre-check is executed when the START switch is pressed



Pre-check execution screen (B63 type)

Pre-check completed!

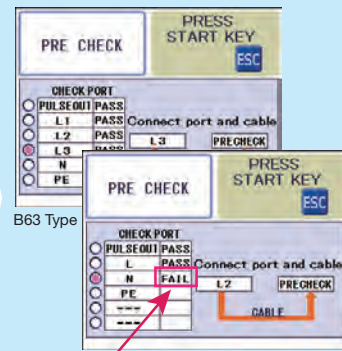


"FAIL" message displayed when the test is not passed

EFT/B FNS

Simple and Easy EUT power line connection Injection phase indicator on front panel

In order to prevent mistakes in the connection of the power cable during the test, front panel shows the connection destination at a glance. Also an outlet box (option) is available for the simple power connection.

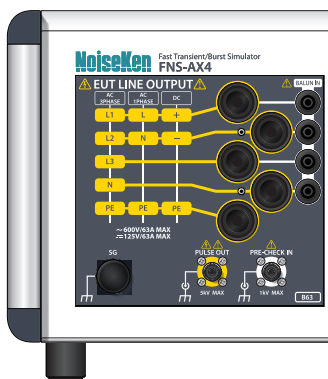





Coupling Balun available for normal mode test

IEC 61000-4-4 standard has the provision of the common mode test only, but noise may enter the equipment in the normal mode in the field and malfunction may occur. ANSI C37.90.1 standard specifies for corresponding normal mode noise testing. FNS-AX4 can now perform the normal mode test complying with ANSI C 37.90.1 standard with an optional dedicated normal mode coupling balun.



Easy to understand "multi-language" test settings


Operation settings are available in English, Japanese, Korean, and Chinese for easy understanding of the test setting and operation.




FNS-AX4-A20/B63

OUTPUT Waveform


PULSE OUT connector waveform: 50 Ω

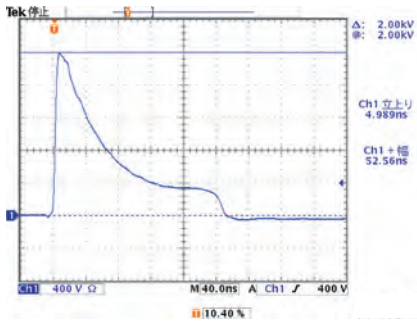

EUT LINE OUTPUT waveform : 50 Ω

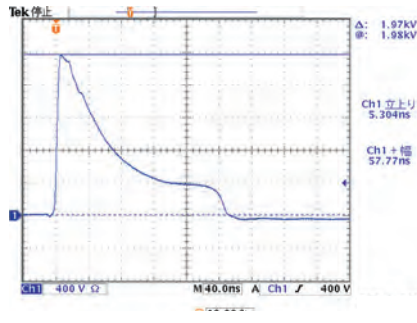


Repetitive pulses output as burst

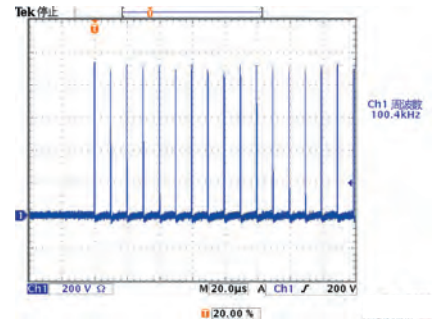


Front Panel / Rear Panel

Front Panel

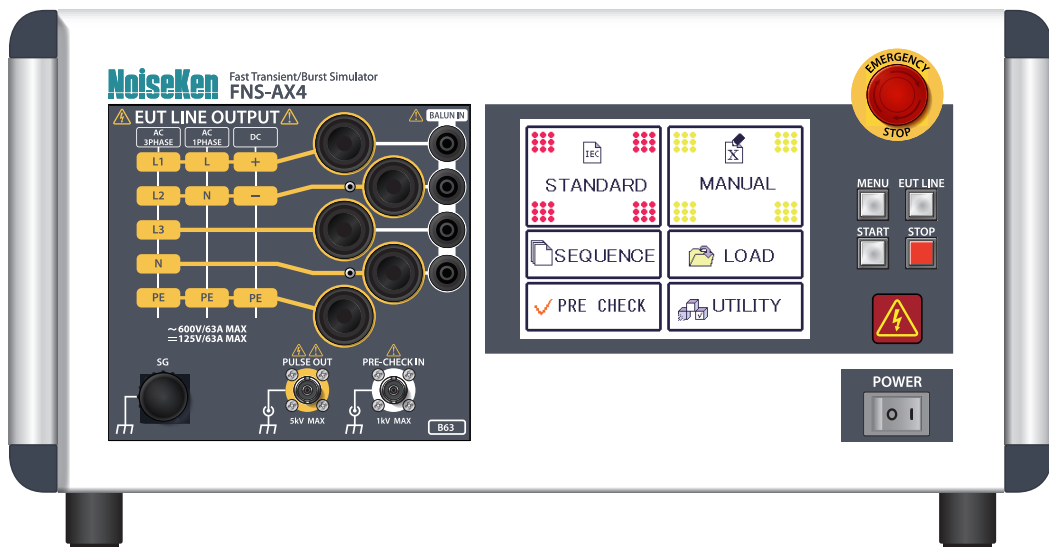

Rear Panel

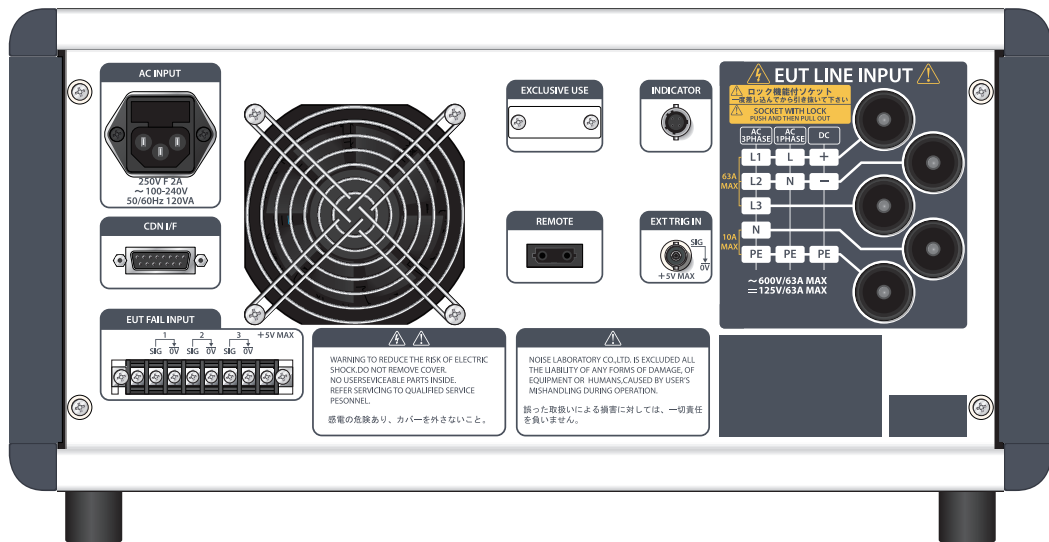

EFT/B FNS

FNS-AX4-A20/B63

Windows software

Remote control from Windows PC is possible using optional Optical USB module (MODEL : 07-00022A). Windows software is available for customer environment for setting test conditions, saving test results, recording test logs, report generation, etc.




Test Log

Manual Test/ Sequential test will create test log and setting file and saved automatically. Setting file is named automatically from the tested year/month/date/time.

名前	更新日時	種類	サイズ
20171017_153333.fn4	2017/10/17 15:33	FnsAx4.Document	7 KB
20171017_153348.fn4	2017/10/17 15:33	FnsAx4.Document	7 KB
20171017_153435.fn4s			8 KB
20171017_153445.fn4s			8 KB
20171017_153528.fn4			7 KB


(Files automatically saved in a folder/ [.fn4]: Manual test setting file/ [.fn4s]: sequence test setting file)

With software setting, you can enable or disable test log saving and also set folder location of the setting files saved. You can load the testing condition saved in the test log to re-test with the previously saved condition.

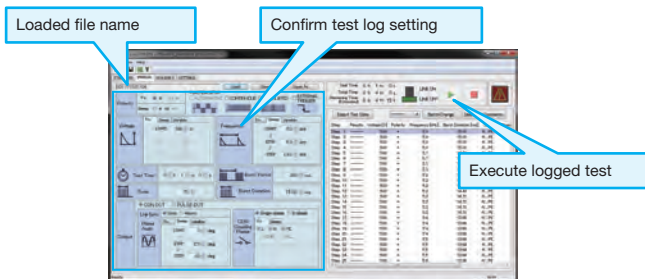


Next calibration date notification

Following notification will be shown when the date set as notified date comes. It is simply set by the pop-up calendar.

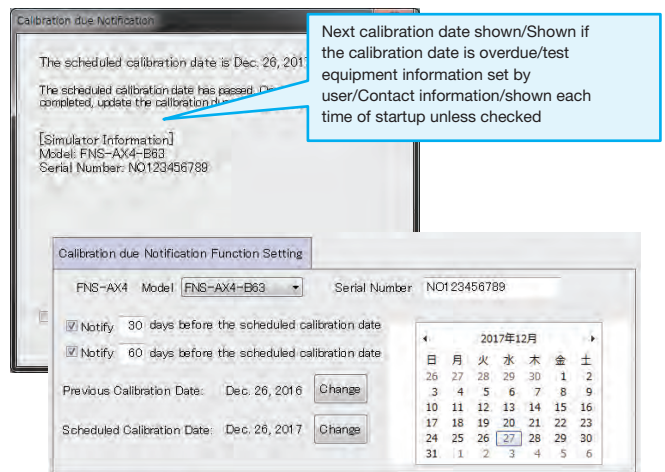


Manual mode test screen (For Manual setting)


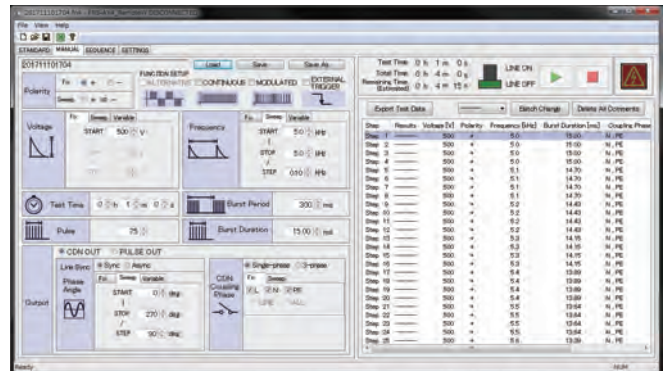


In Manual mode, a balloon shows up to indicate setting limitation by just placing mouse pointer. Balloon display can be enabled or disabled.

Standard mode test screen (For IEC standard testing)

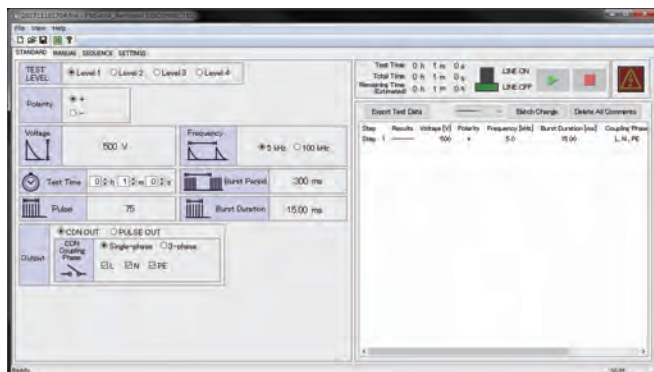

Sequence mode test screen (For sequence test)

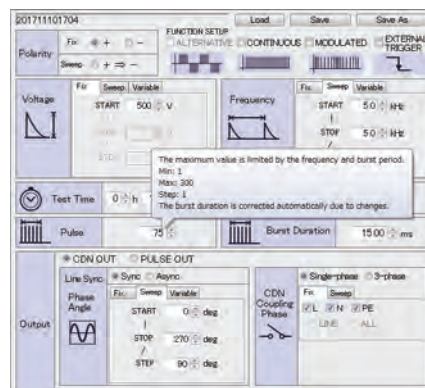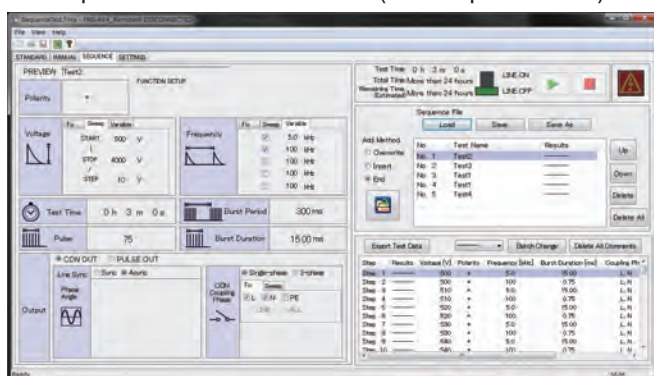

Options

Coupling Clamp MODEL: 15-00018A



Clamp calibration fixture (15-00010A)



Coupling clamp for capacitive coupling test on interconnection lines complying to IEC61000-4-4 Ed.3. In addition, calibration fixture for coupling clamp is available.

- Size: W1110 × D210 × H189 mm (protrusions excluded)
- Visibility of the tested cable is improved by the transparent plastic upper lid
- Clamp bar allows you to easily fix coupling plate to signal or control lines

OUTLET BOX




OUTLET BOX converts LINE output socket.

18-00081A	Outlet box 125 V 15 A 2P+PE	Btype (3Ptype, JP/USAtype) AC 125 V 15 A MAX
18-00082A	multi-outlet box	Japan (JIS), America (UL), Canada (CSA), Australia (CSA), Swiss (SEV), Italy (CEI), Europe (CEE, DIN), England (BS) Input up to 4.55 kV
18-00083A	Outlet box	Europe CEE DIN 250 V 16 A MAX
18-T2300	3P terminal block conversion box	3P terminal block M6 with protective cover & Input up to 5 kV. * This is a custom product. Please contact us for details.
18-N2494	5P terminal block conversion box	5P terminal block M6 with protective cover & Input up to 5 kV. * This is a custom product. Please contact us for details.

Normal mode coupling balun Model: 15-00013A



The product allows injection of test voltage on EUT with Normal mode. 5 kV Max.

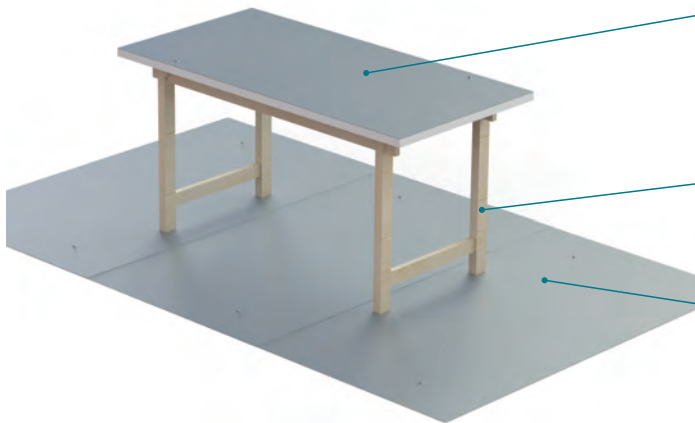

Horizontal Coupling Plane (HCP) MODEL : 03-00020A

Metal plate plane on the table for the testing of tabletop EUT.
W1600 × D800 × t1.5 mm × 1 sheet (Made of Aluminum)
* Used as a horizontal coupling plane in ESD testing and also can be used as a ground plane

Test Table MODEL : 03-00039A

Wooden table to be used for the test to devices under test (DUT).
W1600 × H800 × D800 mm

Ground Reference Plane (GRP) MODEL : 03-00007A

Ground plane to be placed just under the wooden table.
W1800 × D1000 × t1.5 mm × 3 pcs. in 1 set (Made of aluminum)

Insulating block MODEL : 03-00054A



Keep the EUT and its wirings afloat above the ground plane
Size: W300 × D300 × H50 mm
Material: foamed polyethylene
5 pcs per set

Insulating support MODEL : 03-00024A



Keep the EUT and its wirings 10cm afloat above the ground plane
Size: W1200 × D1200 × H100 mm
Material: Wood
Withstanding load: 500 kg

Cubic insulator block MODEL : 03-00029A



Keep the EUT and its wirings 10cm afloat above the ground plane
Size: W100 × D100 × H100 mm
Material: Wood
Withstanding load: 500kg
4 pcs per set

SG cable MODEL : 05-00103A



Braided wire cable to connect between SG terminal of the main unit and the ground reference plane.
Length: 0.1 m

Options

Warning Lamp MODEL : 11-00008B



Alarm lamp for FNS-AX4 series. Alarm lamp illuminated when high voltage is generated at the time of test.

Tri-color pilot light MODEL : 11-00015A



The light is for FNS-AX4 series. Three colors indicate corresponding simulator's test status change.

Attenuator for waveform check MODEL : 00-00017A

Attenuator for measuring high voltage pulse.



Parameter	Specification
Attenuation rate	DC ~ 2 GHz: 40 dB (100:1)
Input pulse peak voltage	4000 V MAX
Tolerable continuous pulse examples	Repetition Frequency : ≤ 5 kHz Burst duration : ≤ 15 ms Burst period : ≥ 300 ms, (Assuming IEC 61000-4-4 pulse waves)
Input impedance	50 Ω (50 $\Omega \pm 1\%$ at DC)
Output impedance	50 Ω (50 $\Omega \pm 1\%$ at DC)
Interface connectors	INPUT: HN (F) OUTPUT: N (F)
Dimensions/ Weight	(W)154.5 mm \times (D)105 mm \times (H)37 mm approx. 1350 g

Attenuator for waveform check MODEL : 00-00018A

Attenuator for measuring high voltage pulse.



Parameter	Specification
Attenuation ratio	DC ~ 400 MHz : 60 dB (1000 : 1)
Input pulse peak voltage	5000 V MAX
Tolerable continuous pulse examples	Repetition frequency : ≤ 5 kHz Burst duration : ≤ 15 ms Burst period : ≥ 300 ms, (Assuming IEC 61000-4-4 pulse waves)
Input impedance	1000 $\Omega \pm 2\%$
Output impedance	50 Ω ($\pm 2\%$ at DC ~ 400 MHz)
Interface connectors	INPUT : NMHV (F) OUTPUT : N (F)
Dimensions / Weight	(W)133 mm \times (D)25.4 mm \times (H)25.4 mm approx. 150 g

USB Optical Module Kit MODEL : 07-00022A




Conversion adapter to interface with PC for the remote control of FNS
USB to optical interface. Fiber cable 5m included.

EMS Probe Kit MODEL : H2-B



Probes for noise injection onto PCB patterns and flat cables using the Impulse Noise Simulator.
By choosing different probes, it is possible to separate the electric field/magnetic field and perform near field irradiation.
* Max. pulse voltage: 1kV, max. pulse width: 50ns, fastest repetition period: 10 ms)

- Noise can be applied to any part of a PCB or harness.
- Allows to detect noise immunity weak points by separating and combining use of electric/magnetic field probes.
- A set of 3 electric field probes and 3 magnetic field probes with different shapes and sizes.
- Noise can be applied in the range of several millimeters, allowing to easily identify weak points.
- Allows to identify weak points for specific frequencies by using a signal generator as a wave source.
- Suited for locating noise sensitive spots by using with the INS or FNS equipment



BS05DB



ES02




ES00




ES05D




BS02




BS02



BS04DB
BS05DB



ES02
ES00



ES05D

Options

Noise Injection Probe MODEL : 01-00034A



A probe for injecting noise directly into the pattern and parts of the printed circuit board.


*Input pulse repetition period: 10 ms or more

- Noise immunity can be tested at the board level because noise can be injected directly into each pin of the LSI.
- Up to 500V noise injection is possible utilizing INS or FNS simulator.
- Possible to exchange the coupling capacitor (Option)
- 50 ohm termination resistor built-in

[Options]

Coupling capacitors: 06-00039A 220pF. 06-00040A 330pF. 06-00041A 3pF. 06-00042A 500pF.

* 01-00034A does not include the coupling capacitors

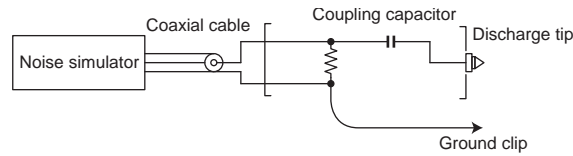


Radiation Probes MODEL : 01-00006A / 7A / 8A / 9A / 10A / 31A / 50A




These probes, in combination with Impulse Noise Simulator allow to emit electromagnetic field radiation noise to the wiring of PCB inside electronic equipment, and is used to search for areas vulnerable to radiation noise.


Parameter	Specifications
Input voltage	4000V Max
Input pulse width	50~1000ns (1μs)
Loop diameter	01-00006A : φ50mm, 01-00007A : φ75mm, 01-00008A : φ100mm, 01-00009A : φ150mm, 01-00010A : φ200mm, 01-00031A : 250mm, 01-00050A : 30mm
Cable length	Approx.2m
Weight	Approx.180g~220g
Termination Resistance	N/A

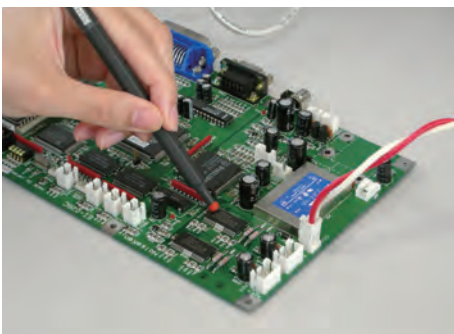

H2-B

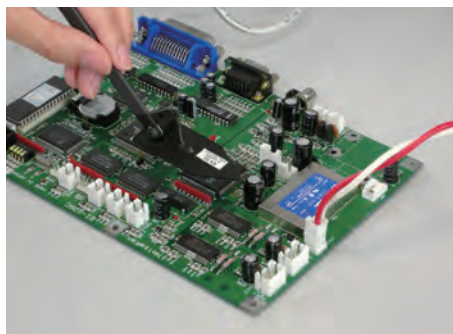


H2-B

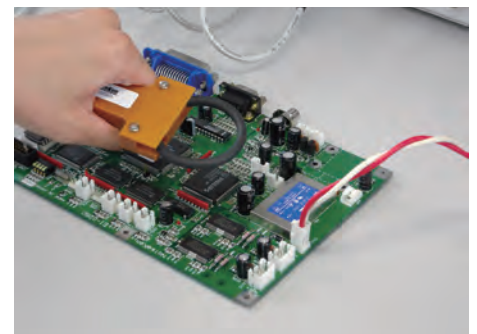


Radiation probe



Noise injection probe

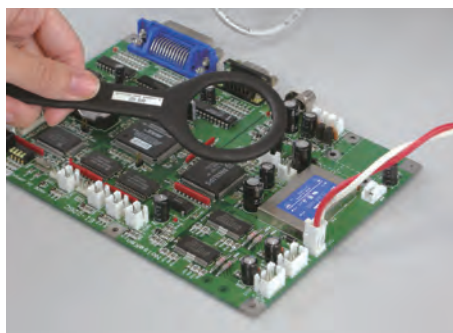

H2-B

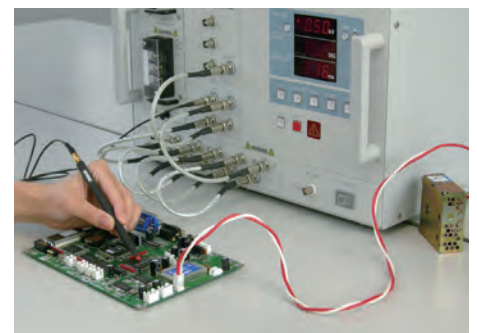

H2-B

Options

Coupling Adaptor MODEL: CA-805B



CA-805B makes testing for noise tolerance possible by just clamping interconnection cable of electrical equipment in combination with FNS series.

- Inject noise without cutting cables
- Able to test individual noise tolerance of electrical equipment
- Able to clamp bundle lines up to 26 mm max diameter

Parameter	Specification
Input voltage	4000 V Max
Dimensions	(W) 350 × (H) 120 × (D) 130 mm
Clamp interim	26mm
Weight	approx. 3 kg

Coupling Adaptor MODEL: 15-00007A (CA-806)



15-00007A (CA-806) makes testing for noise tolerance possible by just clamping interconnection cable of electrical equipment in combination with FNS series.

- Inject noise without cutting cables
- Able to test individual noise tolerance of electrical equipment
- Able to clamp bundle lines up to 27 mm max diameter

Parameter Structure	Specification
Input voltage	2000 V Max.
Coupling ratio	1/10 of input voltage ± 10%
Termination resistance	50 Ω system built-in
Max. diameter of cable clamped	27 mm
Dimensions	(W) 89 × (H) 64 × (D) 120 mm (protrusion excluded)
Weight	approx. 1000 g

EFT/B FNS

<Quick comparison of Clamps>

Clamp Model	Coupling method	Maximum Input voltage	Coupling ratio	Interim diameter of clamp
CA-805B	Capacitive (Electrostatic)	±4000 V	1:1	26 mm
CA-806	Inductive (Magnetic)	±2000 V	10:1	27 mm

High power Coupling Decoupling Network

High power Coupling Decoupling Network (CDN) can be provided for customers' requirements. Please consult with us for details.



Coupling Fixture for High Frequency Surge Test

Coupling fixture provided to inject noise to harness in combination with Fast Transient Burst simulator.

The varieties of coupling capacity are lined up. Please contact us for details.



Fast transient / burst simulator

CDN Unit (DC 600V 200A)

This equipment can be combined with the Fast transient/Burst Simulator's main unit to perform noise superimposition tests on 3 wires (+ / - / PE) up to DC600V/200A.

In combination with the FNS-AX4 Simulator main unit, tests can be performed by setting the applied phase switching and applied phase sweep.

Allows to evaluate burst noise immunity during charging of EV/PHV vehicles, which is required by ECE R10-05/05. (EV Fast Charging applicable)

Target models: FNS-AX4 series

* For using this CDN unit, modification of the Simulator's main body is required. Please contact us for details.

※ This product is a custom product. Please contact us for details.

Customization up to DC1000V is available.



EFT/B FNS

Specifications

Parameter	Specification
Maximum pulse applied voltage	4500V
Number of power lines	3 phase (+ / - / PE)
Power supply capacity	DC 600V 50 / 60Hz 200A max
Coupling mode	common mode
Applied Phase	Single line, all lines, each phase can be set individually
Coupling capacitor	33nF
CDN power supply	AC 100 ~ 240V ± 10% 50/60Hz
Dimensions / Weight	(W)555 mm × (D)790 mm × (H)1250mm (excluding protrusions) / approx.150kg

IEC61000-4-4 Ed.3 Test Standard Overview

1. General

The Test Standard for evaluating immunity of electric / electronic equipment when they are interfered by fast transient repetitive bursts which are generated by break of inductive load equipment or bounds of relay contact point.


2. Test Levels

Open circuit output test voltage and repetition rate of the impulses

Level	On power port, PE		On I/O (input/output) signal, data and control ports	
	Voltage peak (kV)	Repetition rate (kHz)	Voltage peak (kV)	Repetition rate (kHz)
1	0.5	5 or 100	0.25	5 or 100
2	1	5 or 100	0.5	5 or 100
3	2	5 or 100	1	5 or 100
4	4	5 or 100	2	5 or 100
X	Special	Special	Special	Special


3. Burst Generator and Waveform Verification

Circuit diagram of a fast transient/burst generator

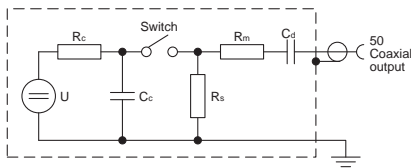


U High-voltage source
 Rc Charging resistor
 Cc Energy storage capacitor
 Rs Impulse duration shaping resistor
 Rm Impedance matching resistor
 Cd DC-blocking capacitor


Waveshape of a single pulse into a 50 Ω load

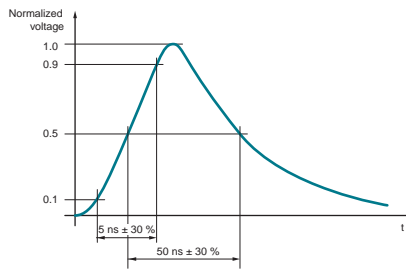


Waveshape of a single pulse into a 1 kΩ load

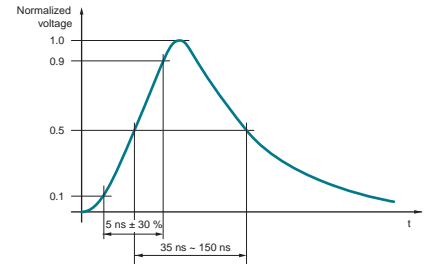


Pulse waveshape into a 50 Ω load and general graph of a fast transient/burst

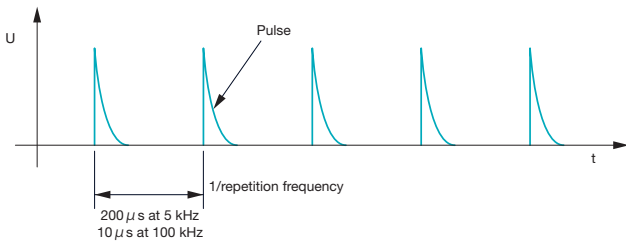

■ CDN for AC/DC power mains supply ports/terminals FNS-AX4 allows injection to All Phases and to an arbitrary phase

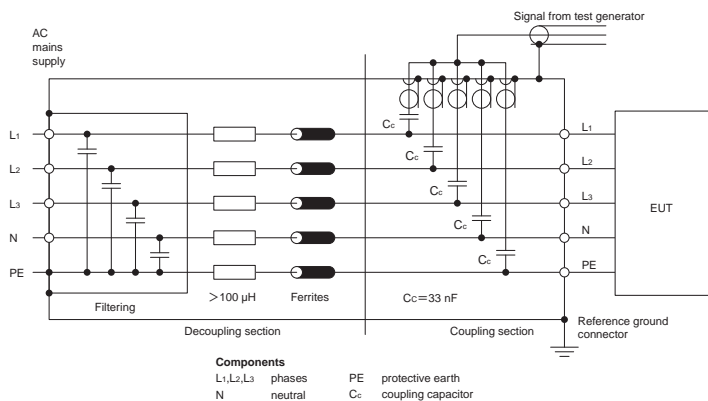

■ Structure and dimensions of Capacitive coupling clamp for signal and control lines

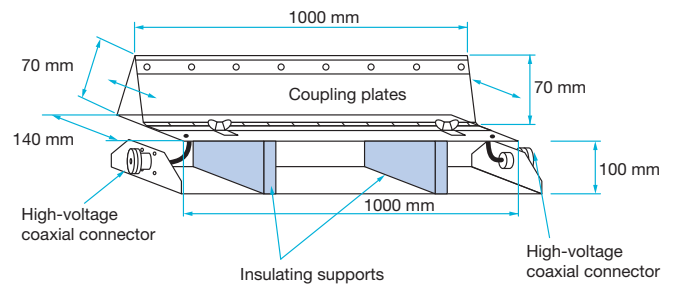



IEC61000-4-4 Ed.3 Test Standard Overview

4. Test Setup

■ Test Method to Power Supply Lines

- ① Put the simulator onto ground reference plane which is connected to the protective ground and connect SG terminal on the front panel to the ground reference plane.
- ② Place an insulating support (10cm thick) onto the ground reference plane and put EUT on the support (so that the EUT can be isolated from the ground reference plane).
- ③ Connect LINE OUTPUT on the front panel of the simulator to EUT with a cable (keep distance of 50 cm for Table-Top EUT, and 1m for Floor-Standing EUT) and start operation of EUT.
- ④ Set the required test conditions (like the burst voltage, etc.) and start the test.



In case of table top EUT

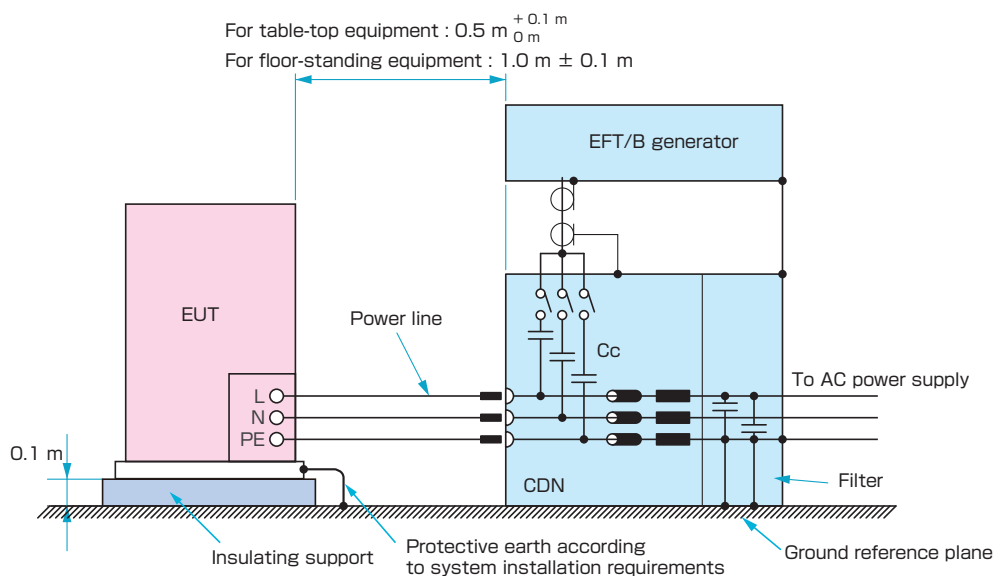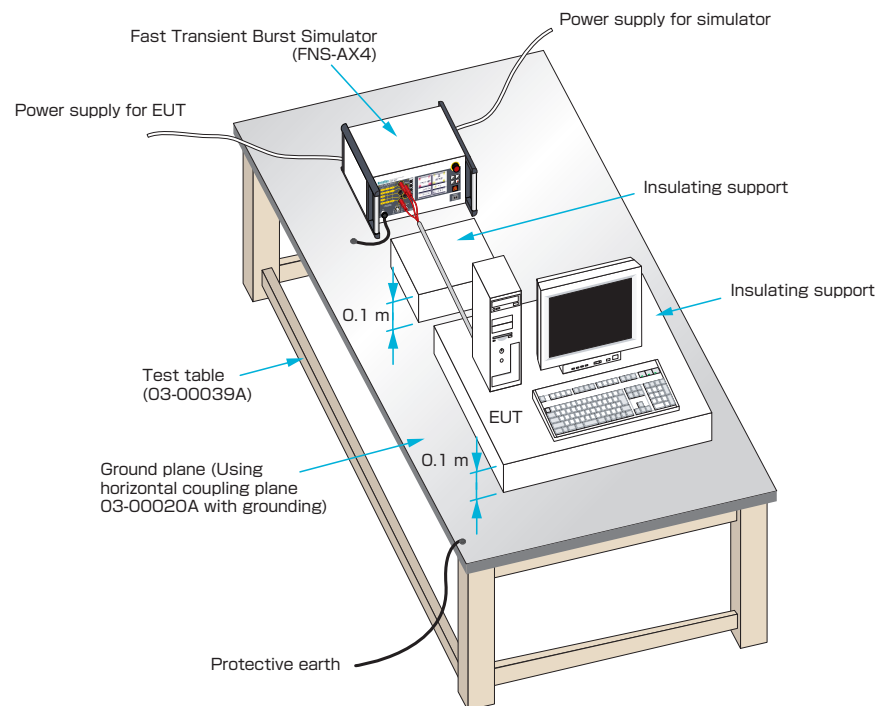

IEC61000-4-4 Ed.3 Test Standard Overview

■ Test Method to Signal or Control Lines

- ① Put the simulator onto ground reference plane which is connected to the protective ground and connect SG terminal on the front panel to the ground reference plane.
- ② Place the coupling clamp (Option) onto the ground reference plane.
- ③ Connect PULSE OUT port to connector of the coupling clamp.
- ④ Pass the line cable through the coupling clamp. Adjust the clamping part so that the coupling capacity can be largest (space between the cable and clamp can be minimum).
- ⑤ Cover the coupling clamp for preventing the electrical shock, set the required test conditions (like the burst voltage, etc.)

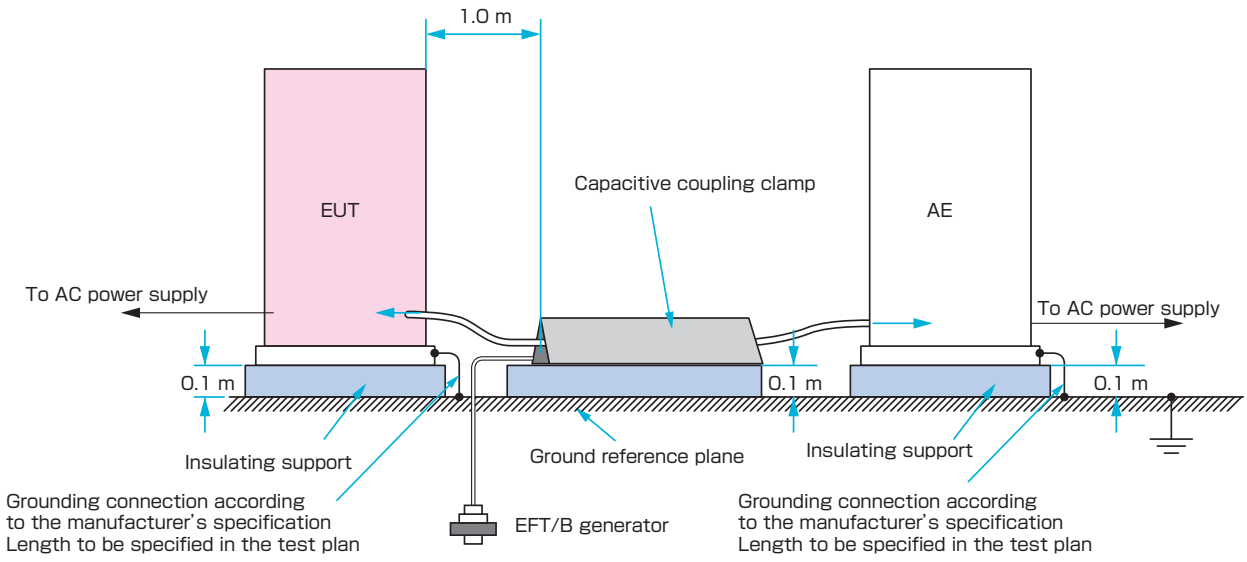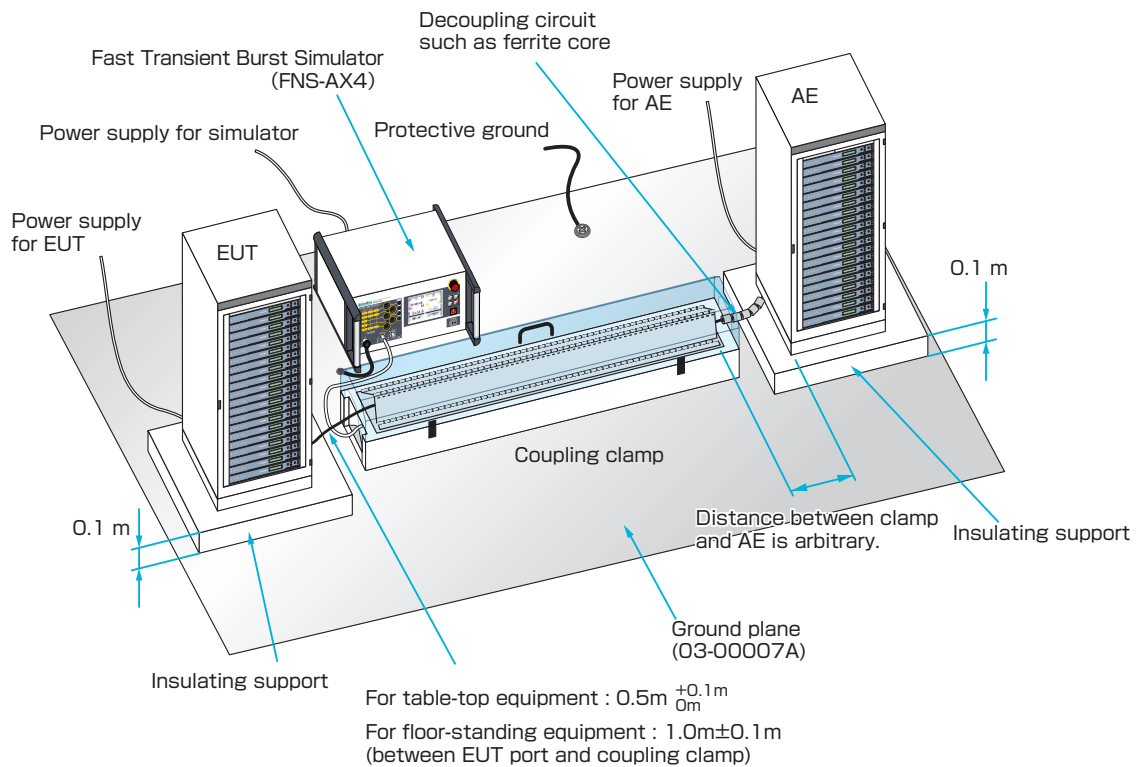

EFT/B FNS

IEC61000-4-4 Ed.3 Test Standard Overview

5. Test Procedure

The test shall be carried out on the basis of a test plan that shall include the verification of the performances of the EUT as defined in the technical specification.

- Type of test that will be carried out;
- Test level;
- Polarity of the test voltage (both polarities are mandatory);
- Internal or external generator;
- Duration of the test (not less than 1 min);
- Number of applications of the test voltage;
- EUT's ports to be tested;
- Representative operating conditions of the EUT;
- Sequence of application of the test voltage to the EUT's ports;
- Auxiliary equipment;

6. Evaluation of Test Results and Test Report

Classify tests results as below in terms of specifications and operating conditions of EUT.


- 1) Normal performance within limits specified by the manufacturer, requestor or purchaser;
- 2) Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- 3) Temporary loss of function or degradation of performance, the correction of which requires operator intervention;
- 4) Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

Notes: This test procedure and test set-up are extracted from IEC61000-4-4 Ed.3 (2012) and JIS C 61000-4-4 standards for applying to our products.
Please refer to the Standards if more details are required.

■ Test Method using various clamps (outside of IEC 61000-4-4 compliance testing)

Test Method using Fast Transient / Burst Simulator


- ① Place the simulator onto the ground plane which is connected to the protective earth and connect SG terminal on the front panel to the ground plane.
- ② Connect power cable (Standard accessory) to AC IN on the back of the simulator.
- ③ Place coupling adaptor CA-805B (Option) onto the ground plane and connect G terminal on side connector part of the clamp to the ground plane.
- ④ Connect PULSE OUT connector on the front of the simulator to connector of the adaptor.
(Pay due attention so that no high voltage is being output during the connection)
- ⑤ Clamp the interconnection lines to be tested with the adaptor.
- ⑥ Set the test conditions like the coupling voltage, etc. , by the touch-panel on the simulator and start the test.

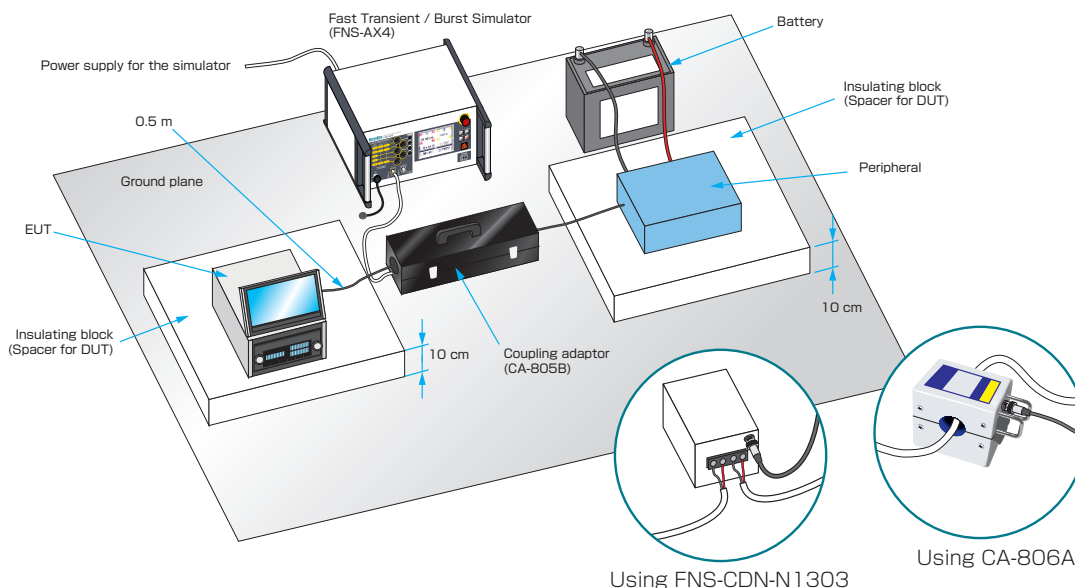

IEC61000-4-4 Ed.3 Test Standard Overview


Waveform Verification on 50Ω load (Using waveform verification attenuator 00-00017A)

- Connect between input of waveform verification attenuator 00-00017A and PULSE OUT of the test equipment using coaxial cable comes with the attenuator (HN(P)-NMHV(P)).
Also connect between oscilloscope input and output connector of the attenuator using coaxial cable comes with the test equipment (N(P)-BNC(P)).
Add an attenuator to oscilloscope if necessary.
- Input impedance of oscilloscope shall be set to 50 ohm because output impedance of 00-00017A is 50 ohm.
- START the test equipment generator.

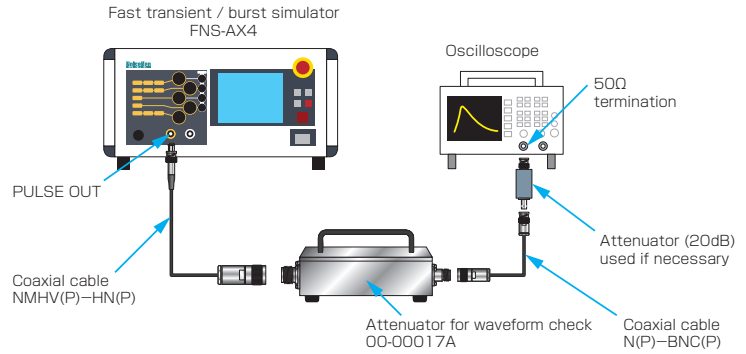

Waveform Verification on 1kΩ load (Using Waveform verification attenuator 00-00018A)

- Directly connect the input of waveform verification attenuator 00-00018A and PULSE OUT of the test equipment.
- Input impedance of oscilloscope shall be set to 50 ohm because output impedance of 00-00017A is 50 ohm.
- START the test equipment generator.


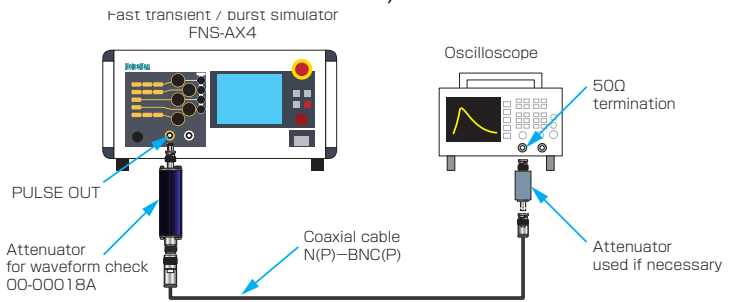


Waveform verification at EUT LINE OUT (Using 02-00151A and 00-00017A)

- Use the waveform verification connector(02-00151A) included with the FNS-AX4 onto EUT LINE OUTPUT and ground reference socket.
- Set the simulator to inject all phases and verify waveform of each OUTPUT LINE.
- Insert the waveform verification connector straight onto EUT LINE OUTPUT connector and ground reference socket next to the connector. Be sure to insert deep and secure.
- Connect between input connectors of waveform verification attenuator 00-00017A and the waveform verification adapter using the coaxial cable included with the attenuator (HN(P)-NMHV(P)).
Also connect between oscilloscope input and output connector of the attenuator using the coaxial cable included with the test equipment (N(P)-BNC(P)).
Add an attenuator to the oscilloscope if necessary.
- Input impedance of oscilloscope shall be set to 50 ohm because output impedance of 00-00017A is 50 ohm.
- START the test equipment generator.



02-00151A adapter mounted onto L2(N.-) port of EUT LINE OUTPUT

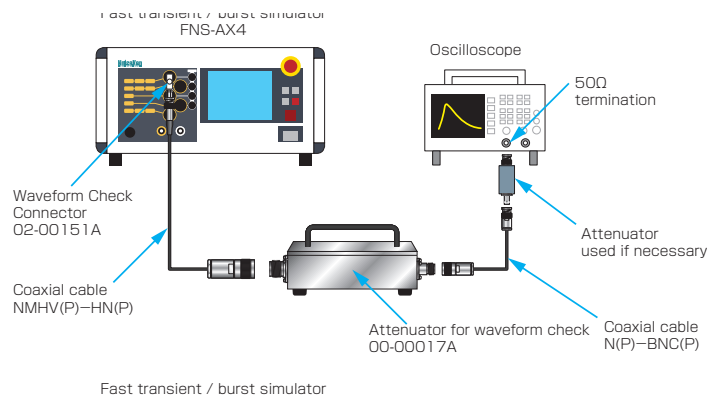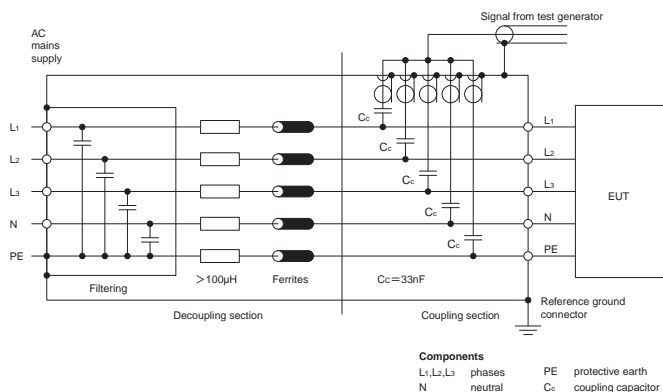


Lightning Surge Simulator

LSS-6330A series

This simulator for evaluation of the resistance of electronic devices simulates "high-energy induced lightning noise" induced in distribution lines and communication lines due to the ground potential fluctuations caused by lightning strikes.

- Compliant to IEC 61000-4-5 Ed.3, IEC61000-4-12 Ed.3 (RINGWAVE 100kHz) and ANSI IEEE62-45 (2002)*
- Equipped with pre-check function for a simple pre-start inspection of the simulator (not calibration)
- Equipped with output waveform monitor terminal: waveform applied to EUT during testing can be observed on oscilloscope.
- Equipped with 2 test modes. Standard Test mode with IEC 61000-4-5 standard preset test conditions and Manual Test mode allowing arbitrary test conditions setting for easy settings according to the application.
- Optional PC remote control software is available for supporting lengthy lightning surge testing.
- Employs MPU control that simplifies continuous testing: surge output, waveform switching, polarity switching, etc. can be performed automatically.

* For Ring Wave coupling, simultaneous application is possible only for the Basic test type with PE as surge COM.

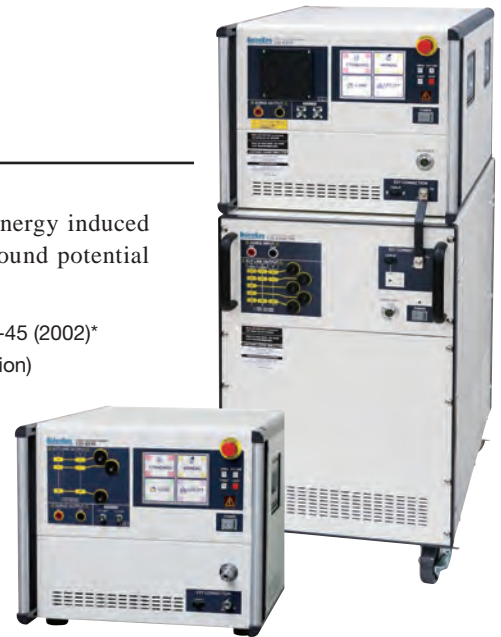

Model	Specifications
LSS-6330A-A20A	left picture: single phase 20A type
LSS-6330A-B63A LSS-6330A-C63A	right picture: three phases 63A type (up: surge generating unit, below: CDN) * C63 does not include the Ring Wave

Simple pre-start inspection with the equipped pre-check function

Before, pre-start inspection required using two high-voltage probes and an oscilloscope capable of differential measurement for the output waveform verification. Now, with the LSS-6330A you can pre-check the presence of output simply by connecting a dedicated cable to the main body of the simulator. (Check available at SURGE OUTPUT / EUT LINE OUTPUT)

CDN pre-check

Generating Unit pre-check


Press Start for performing Pre-check

Pre-Check Complete !

"FAILED" message displays when pre-check fails


Intuitive connection panel Applied phase displayed on the front panel

Equipped with an intuitive connection front panel helping prevent misconnection of power cables during the test. Optional Outlet boxes are also available for easier connection.

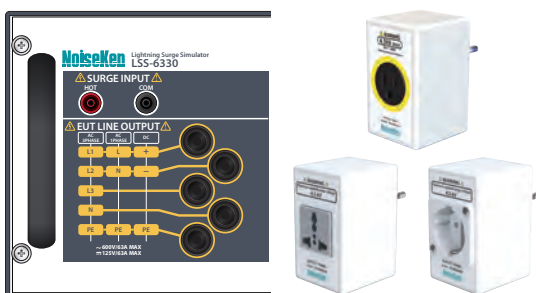

Emergency stop button and interlock terminal ensuring safety

Equipped with operation safety functions in both hardware and software. Safety connection sockets as well as emergency stop switch and interlock terminal secure high operation safety regarding EUT connection. Using optional "safety fence" and "EUT protection box" allows ensuring further safety.

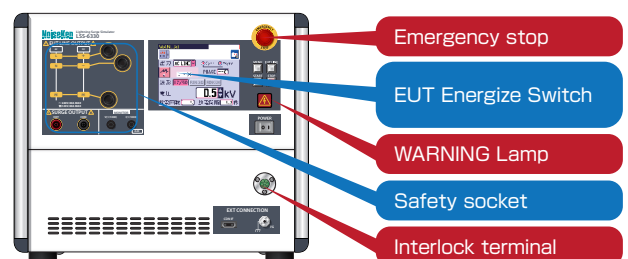

LSS-6330A series

PC Software available (option) For Remote Test Control (14-00053B)


Allows setting test conditions, saving test results and test history, exporting test reports, etc.



* Software English version available


Waveform verification through "output waveform monitor terminal"

In response to multiple requests from our customers, we equipped the monitor terminal allowing to verify the injected waveform on an oscilloscope. Even without the oscilloscope, the test panel displays applied voltage and current parameters.

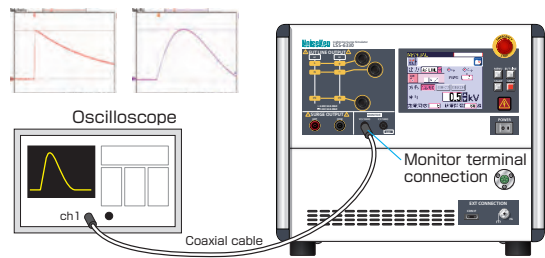

Multilingual localization

Multilingual touch panel display supports easy and sure test setting. English, Chinese, Korean and Japanese languages available.

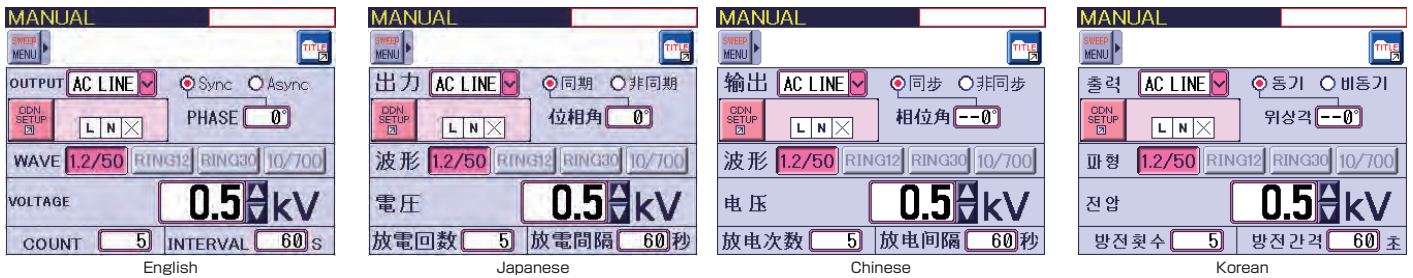

Specifications

■ Surge generator unit LSS-6330A-A20A / B63A / C63A common

Parameter	Specifications	Notes
Surge Waveform	1.2/50 μ s-8/20 μ s combination 10/700 μ s-5/320 μ s combination RING WAVE	※RING WAVE only for A20A and B63A
1.2/50 μ s-8/20 μ s combination	Open voltage	0.5kV ~ 6.7kV \pm 10%
	Front time	1.2 μ s \pm 30%
	Time to half-value	50 μ s \pm 20%
	Short-circuited current	250A ~ 3350A \pm 10%
	Front time	8 μ s \pm 20%
10/700 μ s-5/320 μ s combination	Open voltage	0.5kV ~ 6.7kV \pm 10%
	Front time	10 μ s \pm 30%
	Time to half-value	700 μ s \pm 20%
	Short-circuited current	12.5A ~ 167.5A \pm 10%
	Front time	5 μ s \pm 20%
RING WAVE ※for A20A and B63A only	Open voltage	0.25kV ~ 6.6kV \pm 10%
	Front time	0.5 μ s \pm 30%
	Frequency	100kHz \pm 10%
	Waveform envelop	Pk2 = 40% < Pk1 < 110% Pk3 = 40% < Pk2 < 80% Pk4 = 40% < Pk3 < 80%
	Short-circuited current	8.3 ~ 220A \pm 10% (30 Ω) 20.8 ~ 550A \pm 10% (12 Ω)
Polarity	+/-	
Output impedance	2 Ω \pm 10%	1.2/50 μ s waveform
	40 Ω \pm 10%	10/700 μ s waveform
	12 Ω \pm 20%、30 Ω \pm 20%	RING (selectable)

LSS-6330A series

Parameter	Specifications	Notes
Surge generation circuit	Floating	
Minimum charging time	0.0kV ~ 4.0kV : 5 sec 4.1kV ~ 6.7kV : 10 sec	1.2/50 μ s waveform
	0.0kV ~ 4.0kV : 10 sec 4.1kV ~ 6.7kV : 15 sec	10/700 μ s waveform
	0.0kV ~ 4.0kV : 1 sec 4.1kV ~ 6.6kV : 3 sec	RING WAVE
Communication fuction	RS-232C compliant Optical connector	Optional
	External CDN control	※only for B63A and C63A
Emergency stop	Push-lock button switch (Test STOP, High voltage OFF, EUT Line switch SHUT OFF)	
Interlock function	External connection status detection	
Emergency lamp	Red LED blinking after start the tests	
Emergency lamp connector	Equiped with emergency lamp connector. Emergency lamp turns on after the test start.	
EUT Fail	3 ports	
Voltage monitor	BNC output、2000V/V \pm 10% Accuracy : \pm 10% vs. actual output	Waveform not guaranteed
Current monitor	BNC output、1000A/V \pm 10% Accuracy : \pm 10% vs. actual output	Waveform not guaranteed
Phase angle control	0° ~360° \pm 10°	EUT power AC90V Min. 50Hz/60Hz \pm 10%
Trigger input	asynchronous , synchronized to AC line 0° ~360° / 1° step, external input	
Power supply	AC100V ~ AC240V \pm 10% 50Hz / 60Hz \pm 10%	
Operational environment	Temperature : 15 ~ 35°C Humidity : 25 ~ 75%RH	
Dimensions	LSS-6330A-A20A : (W)430 × (H)349 × (D)530 mm LSS-6330A-B63A / LSS-6330A-C63A surge generating unit : (W)430 × (H)349 × (D)530 mm	protrusions excluded
Weight	LSS-6330A-A20A : approx 50kgs LSS-6330A-B63A surge generating unit : approx 40kgs LSS-6330A-C63A surge generating unit : approx 35kgs	

■ CDN Output Unit LSS-6330A-A20A

Parameter	Specifications	Notes
Surge Waveform	1.2/50 μ s-8/20 μ s combination,RING WAVE	
1.2/50 μ s-8/20 μ s combination	Open voltage	0.5kV ~ 6.7kV \pm 10%
	Front time	1.2 μ s \pm 30%
	Time to half-value	50 μ s \pm 20%
	Short-circuited current	250A ~ 3350A \pm 10%
	Front time	8 μ s \pm 20%
	Time to half-value	20 μ s \pm 20%
	Open voltage	0.5kV ~ 6.7kV \pm 10%
	Front time	1.2 μ s \pm 30%
	Time to half-value	50 μ s +10 μ s /-25 μ s
	Short-circuited current	41.7A ~ 558A \pm 10%
	Front time	2.5 μ s \pm 30%
	Time to half-value	25 μ s \pm 30%
RING WAVE	Open voltage	0.25kV ~ 6.6kV \pm 10%
	Front time	0.5 μ s \pm 30%
	Frequency	100kHz \pm 10%
	Waveform envelop	Pk2 = 40% < Pk1 < 110% Pk3 = 40% < Pk2 < 80% Pk4 = 40% < Pk3 < 80%
	Short-circuited current	20.8 ~ 550A \pm 10%
	Front time	0.2 ~ 1 μ s
Power Capacity for EUT line	AC240V/20A MAX 50/60Hz、DC125V/20A MAX	
Decoupling coil	1.5mH	
Voltage dip	Less than 10% of the rated voltage when the rated current is energized	at the AC CDN unit output terminal
Residual voltage	Less than 15% of the max injected voltage or less than double of the power line rated voltage (peak value)	

LSS-6330A series

■ CDN Output Unit LSS-6330A-B63A / LSS-6330A-C63A

Parameter	Specifications	Notes
Surge Waveform	1.2/50 μ s-8/20 μ s combination, RING WAVE	※RING WAVE only for B63A
1.2/50 μ s-8/20 μ s combination	Open voltage	0.5kV \sim 6.7kV \pm 10%
	Front time	1.2 μ s \pm 30%
	Time to half-value	50 μ s \pm 20%
	Short-circuited current	250A \sim 3350A \pm 10%
	Front time	8 μ s \pm 20%
	Time to half-value	20 μ s \pm 20%
	Open voltage	0.5kV \sim 6.7kV \pm 10%
	Front time	1.2 μ s \pm 30%
	Time to half-value	50 μ s +10 μ s /-25 μ s
	Short-circuited current	41.7A \sim 558A \pm 10%
	Front time	2.5 μ s \pm 30%
	Time to half-value	25 μ s \pm 30%
	Open voltage	0.25kV \sim 6.6kV \pm 10%
	Front time	0.5 μ s \pm 30%
Frequency	100kHz \pm 10%	
Waveform envelop	Pk2 = 40% < Pk1 < 110% Pk3 = 40% < Pk2 < 80% Pk4 = 40% < Pk3 < 80%	
Short-circuited current	20.8 \sim 550A \pm 10%(12 Ω)	
Front time	0.2 \sim 1 μ s	
Power Capacity for EUT line	AC600V/63A MAX 50/60Hz、DC125V/63A MAX	
Decoupling coil	1.5mH	
Voltage dip	Less than 10% of the rated voltage when the rated current is energized	at the AC CDN unit output terminal
Residual voltage	Less than 15% of the max injected voltage or less than double of the power line rated voltage (peak value)	
Phase angle control	0° \sim 360° \pm 10° EUT power supply AC90V min. 50Hz / 60Hz \pm 10%	
Power supply	AC100V \sim AC240V \pm 10% 50Hz / 60Hz \pm 10%	
Operational environment	Temperature : 15 \sim 35°C Humidity : 25 \sim 75%RH	
Dimensions	(W)430 \times (H)695 \times (D)686 mm / approx 135kgs	protrusions excluded

■ Included Accessories (LSS-6330A-A20A)





Item	Quantity	Notes
AC cable	1	
Line output cable	3	1.5m, Plug - M6
FG cable (05-00070A)	1	2m, M6 - M6
Coaxial cable for monitoring (02-00128A)	1	1m, BNC - BNC
Interlock connector	1	
Precheck cable for Surge output terminal	1	1m, plug - plug
Precheck cable for Line output terminal	1	1m, plug - plug
Line input cable	1set	1red, 1black, 1green/yellow
Surge output cable	2	1.5m, Plug - Alligator clip
Instruction manual	1	
Accessories bag	1	

■ Included Accessories (LSS-6330A-B63A / LSS-6330A-C63A)

Item	Quantity	Notes
AC cable	2	
Line output cable	5	1.5m, Plug - M6
Surge input cable	1	connector cover red & black
FG cable (05-00070A)	2	2m, M6 - M6
Coaxial cable for monitoring (02-00128A)	1	1m, BNC - BNC
Interlock connector	1	
Precheck cable for surge output terminal	1	1m, plug - plug
Precheck cable for line output terminal	1	1m, plug - plug
Interlock cable	1	
FG connection short bar	1	
Optical cable	1	
Line input cable	1set	3red, 1black, 1green/yellow
Surge output cable	2	1.5m, Plug - Alligator clip
Instruction manual	1	
Accessories bag	1	

LSS-6330A series

Front panel

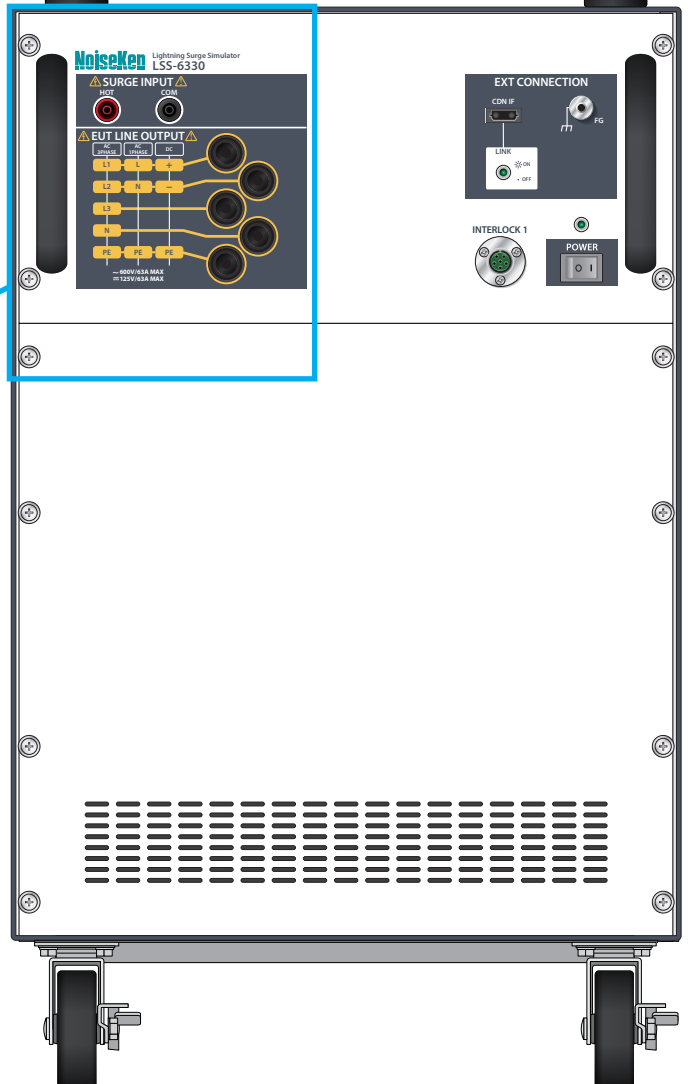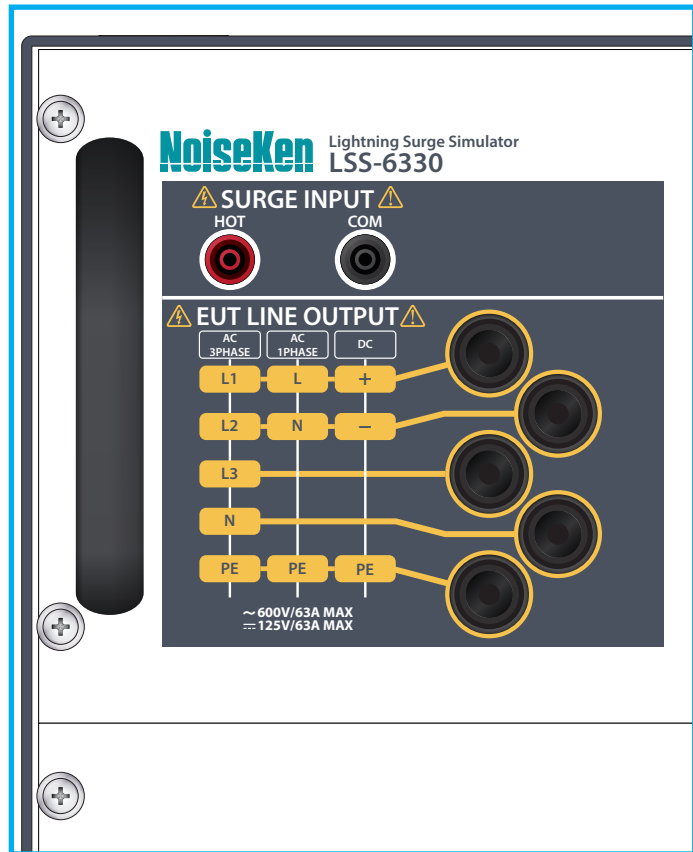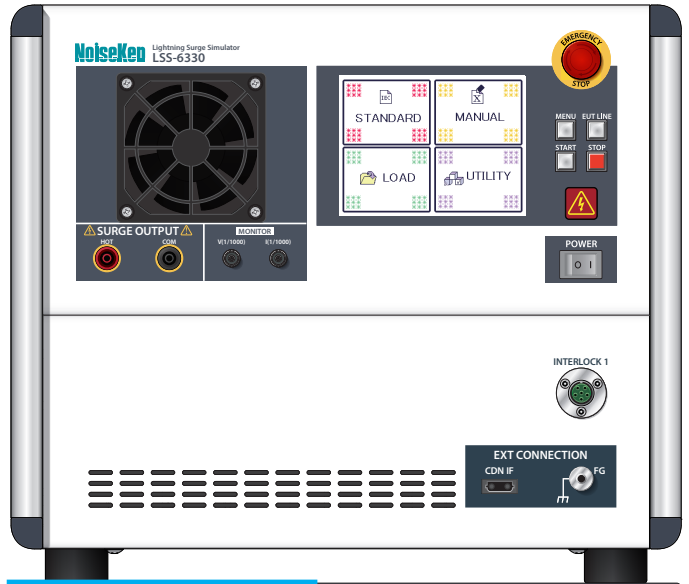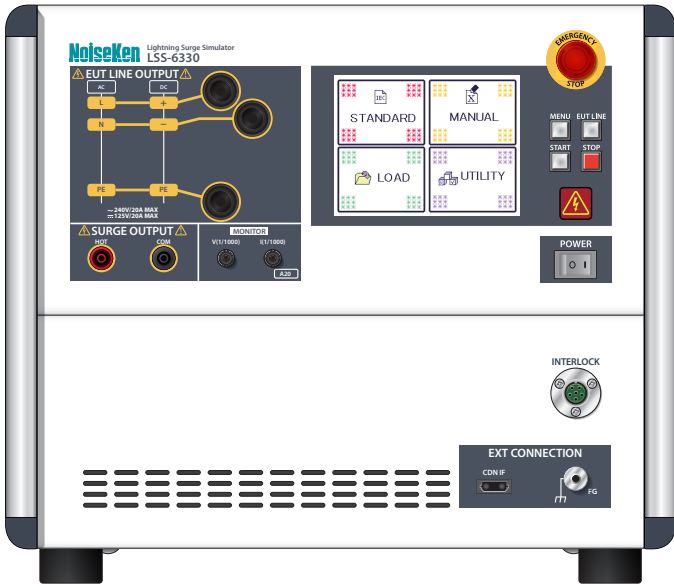


Lightning Surge LSS

LSS-6330A PC Remote Control Software

LSS-6330A RemoteW Model:14-00053B

LSS-6330A RemoteW (model: 14-00053B) is a PC Software for LSS-6330A series Lightning Surge Simulators remote control. This software allows setting of test parameters such as output voltage, polarity, phase angle and application mode. It greatly supports lengthy lightning surge tests, contributing to shorter test time and man-hours reduction.

- Standard Test mode allows testing based on IEC 61000-4-5 standard preset test conditions.
- Manual Test mode allows arbitrary setting of test parameters such as output voltage, polarity, phase angle and application mode.
- Test Report including test conditions, test lists and other test information can be exported in Excel format.
- Compatible with Windows 10 and 11 64 bit versions, supports English and Japanese languages.


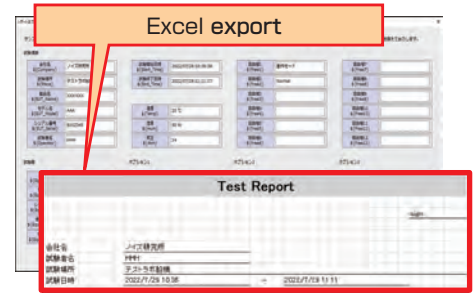


Report Export function

Hardware Configuration

【 Remote Control operation image 】

Perform the lightning surge test by controlling the output voltage, polarity, phase angle and application mode of the simulator's Main Unit.

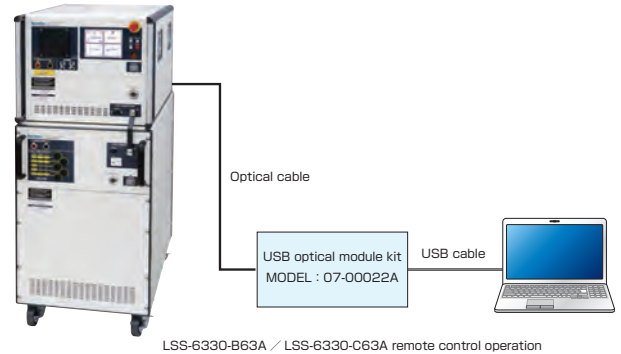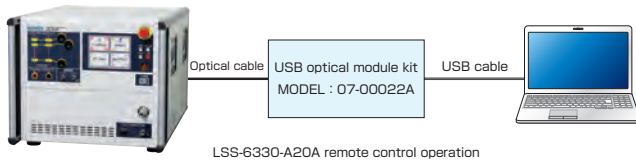

Software system requirements

Parameter	Specifications
OS	Windows 10,64bit (English or Japanese ver.) Windows 11,64bit (English or Japanese ver.)
CPU	Dual-Core over 2.4GHz or better recommended
RAM	8GB or more recommended
Storage	5GB or more available free space
Display	WXGA resolution (1366×768) minimum WXGA ++-resolution (1600×900) or better recommended

【Attention】

- Operation is not guaranteed when using software on cloud services or using online storages.
- For correct "Report Export" function, be sure to have installed Microsoft Excel compatible with the OS and within the support period.
*Please use the Desktop version, not the Store App version.
- USB Optical Module Kit (model 07-00022A) is required.
- 2 (two) available USB ports required.
- CD-ROM or DVD-ROM drive required for installing drivers for the USB Optical module.


PC remote control software

Standard Test mode



Perform IEC Standard test easily

Manual Test mode

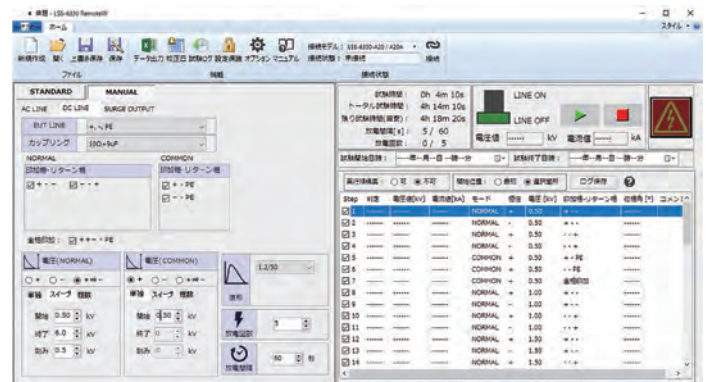

Perform testing at arbitrary test parameters settings

Lightning Surge Simulator LSS-F03 series

For a stricter test with a maximum voltage of 15 kV

A tester simulatively generates "High energy induced lightning noise" which induced to distribution lines or communication lines by ground potential fluctuation caused by lightning strikes.

- Lightning surge simulator compliant with the IEC61000-4-5 Edition 3 requirements
- Maximum output voltage 15 kV (maximum coupling of 15 kV to AC / DC CDN and 6 kV to Telecom CDN)
Enables to conduct the more extended reliability test including the destructive test
- Large size LCD for the operation is adopted for realizing better visibility and operatability
- Easy operation for the sequential tests with adoption of MPU control. Surge output / Waveform switching / Polarity switching / Sequence can be automated sequentially
- Selectable either MANUAL or PROGRAM modes. MANUAL mode is used for the test according to the Standard or performing single conditioned test and PROGRAM mode can perform different conditioned tests sequentially so that the tests can be performed easily along purposes.
- Excellent safety with equipment of interlock
- Standard equipment of terminal for checking the waveforms : Enable to check the waveforms in connection to an oscilloscope with a BNC cable
- Isolation transformers available (Option)
- In order to avoid resonance with the power supply, possible to vary the constant of the decoupling network (1.5, 1.3, 1.0 , 0.8 mH) (Customized production).




Lightning Surge LSS

15kV Output Voltage, 7500A Current Enable EUT destruction resistance test

Approx. 60% of the users are conducting the test with voltage more than the IEC standard regulated voltage.

IEC Standard Requirement < To keep up with quality in the market

Test voltage of lightning surge immunity test

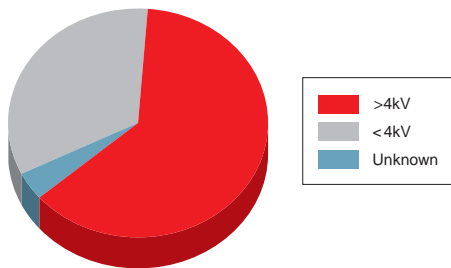


Based on the market research by NoiseKen in 2010

"Touch-panel" adopted for easy test setting

Adopted LCD touch panel for pursuing high visibility and realizing user-friendly operation with affluent icons.

Also, easy operation is realized not only for the test according to IEC Standard but also for the sequential tests with the parameter sweep function.

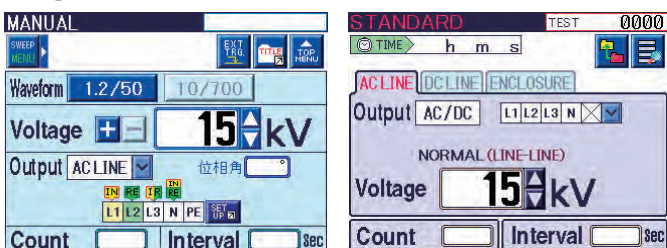

Prevent the Resonance with the Power supply! Inductance constant switching function

Resonance phenomenon may occur in some EUTs when connected to the lightning surge simulator, causing malfunctions. By switching the inductance constant, it is possible to shift the resonance phenomenon and operate the EUT normally. Even when this function is used, the output waveform satisfies the IEC Standard regulations.

(Inductance constant values: 0.8 mH/ 1.0 mH/ 1.3 mH/ 1.5 mH)


* This function is available as a custom order. Please contact us for details.



Inductance Constant switch section

"Multi-languages" for easy operation processing available


English, Japanese, Chinese and Korean languages available for easy operation processing.

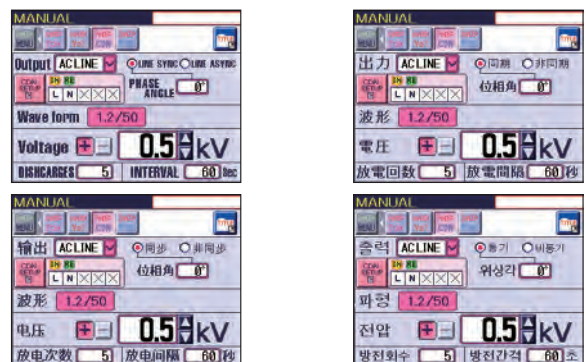

LSS-F03 series


"Indicator" which is linked with the test setting equipped

Indicators which visualize the cables connections in the test equipped.

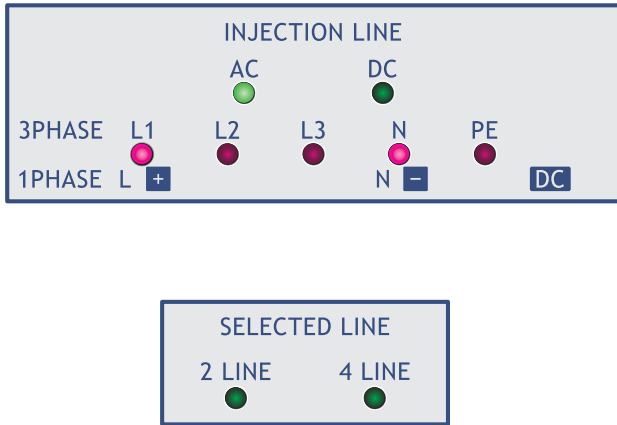

PC control available with the optional software

Dedicated software allows control from an external Windows® PC. enabling to output the test result report as a record.
* Software is available for download from our website.

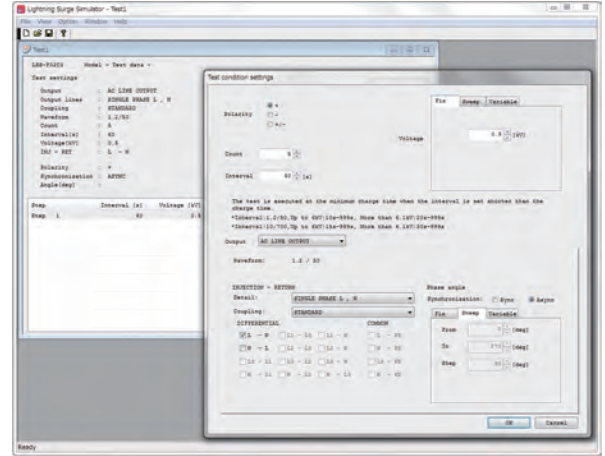

"Emergency stop" & "Interlock terminal" to ensure the test operator's safety

Emergency stop function ensuring safety of the test operator equipped both in the main body and the software. Also, the interlock setting and output voltage limit function equipped. Protective safety fence and protective safety box are available as options for a more safe test.



"Output waveform monitor terminal" which can ease pre-checking of the waveforms prior to the actual test

Monitor terminal adopted to allow a simple waveform check before the test.

*The terminal is just for simple checking.

If an accurate measurement is required, the specialized equipment is necessary.

Please contact us for more details.

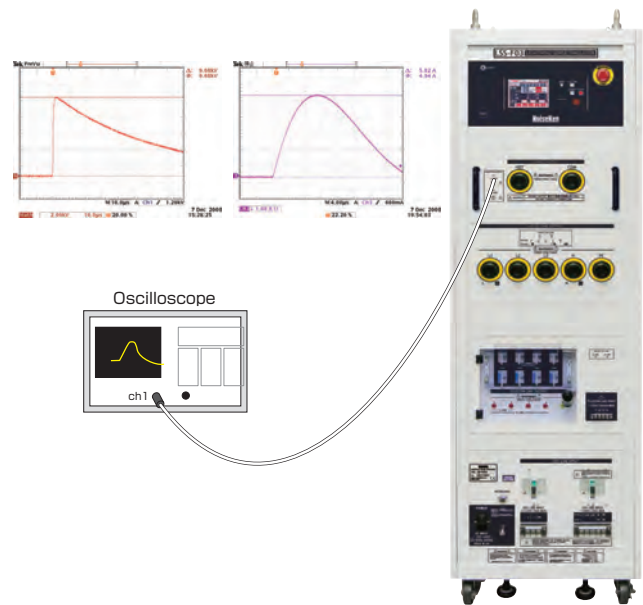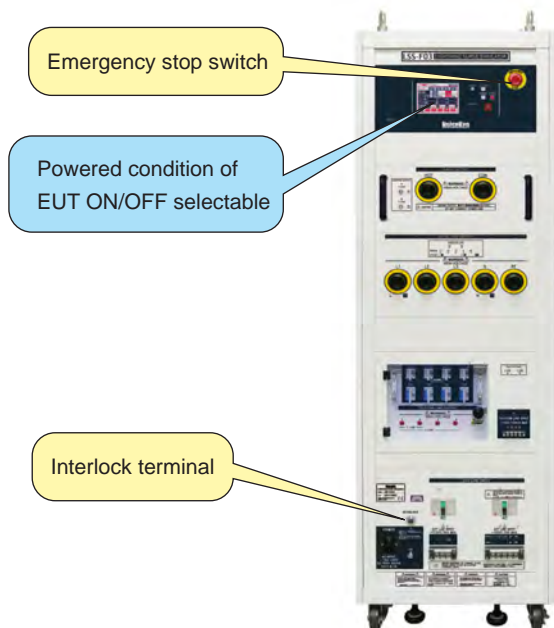

Model numbers meaning:

LSS-F03-□□A	1 : Model for single phase EUT L/N/PE
	3 : Model for 3-phase EUT L1/L2/L3/N/PE(Available both for single phase & 3-phase)
	A : 1.2/50 μ s-8/20 μ s (generates 1 surge type)
	C : 1.2/50 μ s-8/20 μ s, 10/700 μ s-5/320 μ s (2 types)

Specifications

Parameter	Specification	Note
Surge generating unit		
1.2/50 μ s - 8/20 μ s	Output voltage 0.5 kV ~ 15 kV \pm 10%	
Combination waveforms	Front time 1.2 μ s \pm 30%	Common for all models Voltage step : 0.1 kV step The setting can be from 0 kV
	Duration 50 μ s \pm 20%	
	Output current 250 A ~ 7500 A \pm 10%	
	Front time 8 μ s \pm 20%	
	Duration 20 μ s \pm 20%	
10/700 μ s-5/320 μ s	Output voltage 0.5 kV ~ 15kV \pm 10%	
Combination waveforms	Front time 10 μ s \pm 30%	Models : C1A / C3A Voltage step : 0.1 kV step The setting can be from 0 kV
	Duration 700 μ s \pm 20%	
	Output current 12.5 A ~ 375 A \pm 10%	
	Front time 5 μ s \pm 20%	
	Duration 320 μ s \pm 20%	
Output polarity	Positive / Negative	
Interval	10 sec. ~ 999 sec., depending on the set voltage 10 sec. (< 6 kV)	15 sec. ~ in 10/700 μ s waveform
Output impedance	2 Ω \pm 10%	1.2/50 μ s waveform
	40 Ω \pm 10%	10/700 μ s waveform
AC/DC CDN		
Coupling surge waveform	1.2/50 μ s - 8/20 μ s combination waveforms	
Max. coupling surge voltage / current	Up to the values which can be set	
Coupling network	18 μ F Between LINE - LINE (10 Ω + 9 μ F selectable)	
Correspondent to IEC61000-4-5	10 Ω \pm 9 μ F Between LINE - PE (18 μ F selectable)	
Injection mode	Between LINE - LINE, Between LINE - PE	
Power supply lines structure for EUT	Single phase AC : L / N / PE	Model : A1A / C1A
	DC : + / - / PE	
	3-phase AC : L1 / L2 / L3 / N / PE (Common for single phase and 3-phase)	Model : A3A / C3A
	DC : + / - / PE	
EUT power capacity	AC 240 V / 20 A MAX 50/60 Hz DC 125 V / 20 A MAX	Model : A1A / C1A
	AC 500 V / 50 A MAX 50/60 Hz DC 125 V / 50 A MAX	Model : A3A / C3A
Decoupling coil	1.5 mH	
Phase angle control	0 ~ 360° \pm 10°	
CDN for Telecom lines (Only in models C1 and C3)		
Coupling surge waveform	1.2/50 μ s - 8/20 μ s combination waveforms 10/700 μ s - 5/320 μ s combination waveforms	
Max. coupling surge voltage / current	6 kV (waveform guaranteed up to 2 kV for 1.2/50 μ s waveform and up to 4 kV for 10/700 waveform)	
Impedance matching resistors	40 Ω 80 Ω per 1 line at 2 lines	1.2/50 μ s waveform
	25 Ω per line	10/700 μ s waveform
Coupling mode	Common mode	
Coupling network	Gas arrester : 90 V	
Line for EUT	2 lines / 4 lines DC 50 V / 100 mA MAX	Selectable
Decoupling coil	20 mH	
Others		
Voltage monitor	BNC output, 1 / 2000 \pm 10%	In open-circuit for SURGE OUT
Current monitor	BNC output, 1 mV / A \pm 10%	In short-circuit for SURGE OUT
External communication	RS-232C optical communication	
Power supply	AC 100 V ~ AC 240V \pm 10% 50/60Hz	
Power Consumption	400 VA	
Dimensions	(W)555 \times (H)1450 \times (D)790 mm (A1A / A3A), (W)555 \times (H)1800 \times (D)790 mm (C1A / C3A)	Protrusions excluded (in all models)
Weight	A1A : approx. 290 kg A3A : approx. 300 kg C1A : approx. 325 kg C3A : approx. 340 kg	

Standard accessories

Parameter	Specification / Function	Q'ty	Correspondent model
Surge output cable	HOT / COM	2 pcs.	Common
Output cable to power supply lines	For single phase : L / N / PE	3 pcs.	A1A / C1A
	For 3-phase : L1 / L2 / L3 / N / PE	5 pcs.	A3A / C3A
Output cable to telecom lines	For 1 ~ 4 lines and GND	5 pcs.	C1A / C3A
Arrester unit	For coupling : Equipped to main unit panel	4 pcs.	C1A / C3A
	For input protection : Equipped to main unit panel	4 pcs.	
Monitor cable	BNC - BNC cable	1 pc.	Common
External interlock connector	5P plug (Short between #1 - #3)	1 pc.	Common
Power supply cable	For AC 100 V, 3P equipped with G connector cable	1 pc.	Common
High voltage connector cap	Equipped to main unit panel	5 pcs.	A1A / C1A
		7 pcs.	A3A / C3A
FG cable	For grounding the body	1 pc.	Common
Instruction manual	-	1 volume	Common

● Certain periodical inspection shall be recommended since consumable parts are contained in the products.

In the test to 3-phase 5 lines (with PE) power supply lines, a message which alert the inspection per around 200 sets (in the test to single phase (with PE) power supply lines, it is done per around 800 sets).

(1 set in this case means that the test shall be done with 2 levels (eg. 0.5 kV and 1 kV) for the test series according to IEC 61000-4-5)

* Exchange timing of the parts may differ depending on the operative conditions and environment. Please contact us for more details.

Options


High-speed communication lines CDN MODEL: F-130814-1004



This CDN product is used to apply surges to unshielded symmetrical high-speed communication lines with speed up to 1000Mbit/s, as defined in the IEC 61000-4-5 Standard.

Conversion cables (05-00147A) are required for the CDN connection to the LSS-F03 simulator.
Conversion cables (05-00164A) are required for the CDN connection to the LSS-6330A simulator.

Parameter	F-130814-1004-2	F-130814-1004-4
Maximum input voltage	2kV	4kV
EUT power capacity	DC65V/1A	
Maximum line Number	8 lines	
EUT/AE connector	RJ-45	
Dimensions	(W) 400 × (H) 230 × (D) 240mm	

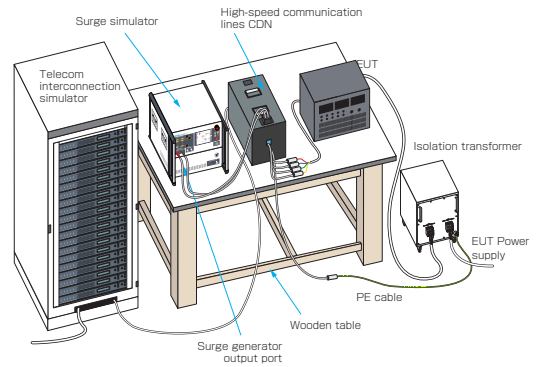


CDN for Interconnection Lines MODEL : LSS-INJ6401SIG



This CDN product is used to apply surges to interconnection lines as defined in the IEC61000-4-5 Standard. With The EUT power capacity of DC50V / 1A it is possible to inject surges to interconnection lines up to 6,600V. Possible to bypass inductor (20 mH) with connecting the attached connection plug to inductor bypass terminal in DC output. Possible to equip the attached surge protective arrester between each line and ground.

Conversion cables (05-T1578) are required for the CDN connection to the LSS-F03 simulator.
Conversion cables (05-00165A) are required for the CDN connection to the LSS-6330A simulator.

Parameter	Specifications
Surge input voltage	500V-6,600V (1.2/50 μ s-8/20 μ s Combination wave)
EUT power capacity	DC50V / 1A
Max. line number	4 lines
Decoupling coil	20mH each line
Matching resistor	40 Ω \pm 10%
Dimensions / Weight	(W) 488 x (H) 456 x (D) 550mm Approx. 45kgs

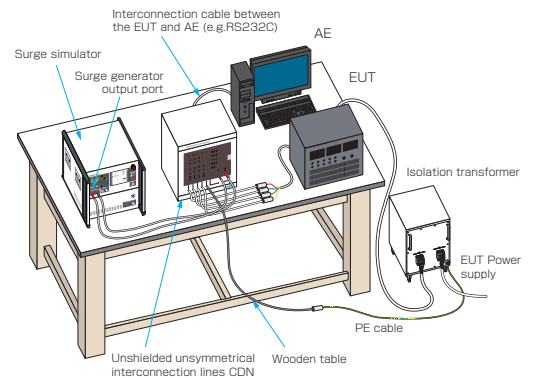

Telecom CDN for LSS-6330A MODEL : LSS-6330ATEL




This CDN product is used to apply surges to unshielded symmetrical interconnection or telecom lines, as defined in the IEC61000-4-5 Standard.

* Please inquire us for more details.

Parameter	Specifications
Surge Input Voltage	6kV
EUT Power Supply Capacity	DC50V / 100mA MAX
Maximum line Number	4 Lines
Decoupling Coil	20 mH each line
Coupling Resistor	40 Ω (1.2/50 μ s - 8/20 μ s Combination wave) 25 Ω (10/700 μ s - 5/320 μ s Combination wave)
Dimensions / Weight	(W) 430 x (H) 695 x (D) 686mm Approx. 75kgs

● Compatible models : LSS-6330A series

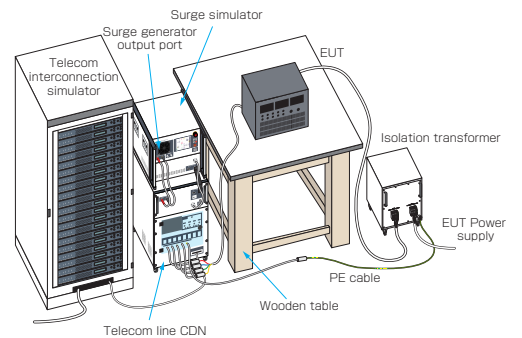

Isolation Transformer MODEL : TF-2302P



Model TF-2302P is a single-phase isolation transformer rated AC240V/30A with dielectric strength of 4kV. For safety reasons, an isolation transformer is indispensable for AC powered testing for equipment.

Parameter	Specifications
Maximum input voltage	Single phase AC240V Max (50/60Hz)
Maximum output current	30A Max
Dielectric strength	Primary winding to core AC4kV (1 minute) Secondary winding to core AC4kV (1 minute) Primary to secondary windings AC4kV (1 minute)
Insulation resistance	100M Ω or more at DC500V
Dimensions / Weight	(W)350×(H)475×(D)400mm (Except for eye bolt and handle) / Approx. 60kg
Accessories	AC single phase line input cable (5.5sq 3-line 3m, One end: with a stick-type soldering terminal, The other end: without terminal): 1pc., PE/FG cable (3.5sq 3m Both ends: with a ϕ 6 ring-type soldering terminal) : 1pc. Instruction Manual: 1pc. AC single phase line output cable (3.5sq 3-line 2m, One end: with stick-type soldering terminal, The other end: with a ϕ 5 ring-type soldering terminal): 1pc.

Isolation Transformer MODEL : TF-6503P, TF-6633P



Model TF-6503P, TF-6633P are three-phase isolation transformers rated AC 600 V / 50 A (TF-6633P 63A) and dielectric strength of 4 kV. For safety reasons, an isolation transformer is indispensable for AC powered testing for equipment.

Parameter	TF-6503P Specifications	TF-6633P Specifications
Maximum input voltage	Single / Three phase AC 600 V Max (50/60 Hz)	
Transformer wiring method	Star wiring	
Maximum output current	50 A Max	63 A Max
Dielectric strength	Primary winding to core AC 4 kV (1 minute) Secondary winding to core AC 4 kV (1 minute) Primary to secondary windings AC 4 kV (1 minute)	
Insulation resistance	100 M Ω or more at DC 500 V	
Dimensions / Weight	TF-6503P: (W)500×(H)640×(D)700mm (Eye bolts and handles excluded) approx. 350kg TF-6633P: (W)500×(H)661×(D)700mm (Eye bolts and handles excluded) approx. 400kg	
Accessories	AC three-phase line input cable (14sq (22sq for TF-6633P) 4-line 3m, One end: with a stick-type soldering terminal, the other end: without terminal):1 pc. PE cable (8sq 3m, One end: with a ϕ 6 ring-type soldering terminal, The other end: without terminal): 1 pc. PE/FG cable (8sq 3m Both ends: with a ϕ 6 ring-type soldering terminal): 1 pc. Instruction Manual: 1 pc. AC three phase line output cable (14sq (22sq for TF-6633P) 4-line 2m, One end: with stick-type soldering terminal, The other end: with a ϕ 5 ring-type soldering terminal): 1pc. PE cable (8sq 2m, One end: with a ϕ 6 ring-type soldering terminal, The other end: with a ϕ 5 ring-type soldering terminal): 1pc.	

Noise Canceller Transformers NCT series



It has superb attenuation characteristics against impulse noises. It can also be used for insulation during impulse noise test. *Connection cable requires modification. Please inquire us for more details.

MODEL	Primary / Secondary Voltage	Rated current	Frequency
NCT-160	120V	5A	50/60Hz
NCT-1240		20A	
NCT-2240	240V	10A	

Circuit Breaker Box MODEL : 18-00072A (20A) / 18-00073A (50A)



A breaker box that can cut off the line between the tester and the power supply side when used in combination with the LSS-6330A series.* Connection cable requires modification. Please inquire us for more details.

Parameter	Specifications (18-00072A)	Specifications (18-00073A)
Rated Voltage	AC250V 50/60Hz DC65V	AC240/415V 3 phase 4 wire Y-connection, 50/60Hz AC240V : Line-N (neutral) AC415V : Line-Line
Rated Current	20A	50A
Switching durability	over 10,000 times (rated open/close 6,000 times, no load open/close 4,000 times, frequency 6 times/minute)	
Neutral pole (N pole)	N/A	The neutral pole does not trip by itself. The neutral pole does not open before the other poles and does not close after the other poles.
Operating temperature, humidity	15 ~ 35°C 25 ~ 75% (no condensation)	
Dimensions	(W)180×(H)92×(D)100mm (excluding protrusions)	(W)180×(H)92×(D)120mm (excluding protrusions)
Weight	0.75 kg	1.2kg

Options

OUTLET BOX



This product is an outlet box for converting a line output socket to a terminal block type.

18-00081A	Outlet box 125V 15A 2P+PE	Btype (3Ptype, JP/USAtype) AC125V 15A MAX
18-00082A	multi-outlet box	Japan (JIS), America (UL), Canada (CSA), Australia (CSA), Swiss (SEV), Italy (CEI), Europe (CEE, DIN), England (BS) Input up to 4.5kV
18-00083A	Outlet box	Europe CEE DIN 250V 16A MAX
18-T2300	3P Terminal Block Conversion Box	3P terminal block M6 with protective cover Input up to 5kV <i>* This is a custom product. Please contact us for details.</i>
18-N2494	5P Terminal Block Conversion Box	5P terminal block M6 with protective cover Input up to 5kV <i>* This is a custom product. Please contact us for details.</i>

● Compatible models : LSS-6330A series

Terminal Connection Board with Multi-Outlet(3P) MODEL : 18-00048B



A relay terminal board for connecting the output of the LSS-6330A series to the EUT. By wiring to the included multi-outlet, you can directly connect a power plug that supports the standards of each country.

single phase 3 lines (withstand voltage 4.5kV)
*Conversion cable (model: 05-00166A) is required for connection with LSS-6330. Not required for LSS-6330A series.

● Compatible models : LSS-F03 series, LSS-6330A series

Terminal Connection Board with Multi-Outlet(5P) MODEL : 18-00058B

A relay terminal board for connecting the output of the LSS-6330A series to the EUT. By wiring to the included multi-outlet, you can directly connect a power plug that supports the standards of each country.

three phase 5 lines (withstand voltage 4.5kV)
*Multi-outlet is for single phase.
*Conversion cable (model: 05-00167A) is required for connection with LSS-6330. Not required for LSS-6330A series.

● Compatible models : LSS-F03 series, LSS-6330A series

Terminal Block for 3P MODEL : 18-00047B

Terminal block board for CDN to connect EUT. 3 pins
*Conversion cable (model: 05-00166A) is required. Not required for LSS-6330A series.

● Compatible models : LSS-F03 series, LSS-6330A series

Terminal Block for 5P MODEL : 18-00044A

Terminal block board for CDN to connect EUT. 5 pins
*Conversion cable (model: 05-00167A) is required. Not required for LSS-6330A series.

● Compatible models : LSS-F03 series, LSS-6330A series

EUT Protective Safety Box MODEL : 11-00006A



Protection box to prevent access to EUT during the test. Further safety can be achieved by combining with the protective safety is fence

(W) 600 × (D) 400 × (H) 350mm **protrusions excluded*

Protective Safety Fence MODEL : 11-00010A

Allows construction of a safe test environment by connecting with the lightning surge simulator's interlock function. Combined use with the EUT protection box ensures a completely safe test environment.

Warning Lamp MODEL : 11-00008B



Alarm lamp for LSS series. Allows to alert and call for attention by blinking during the test.

● Compatible models : LSS-F03 series, LSS-6330A series

Tri-Color Pilot Light MODEL : 11-00015A



Tri-color pilot light for LSS-6330A models. Allows to alert and call for attention by blinking during the test. The lights change in three colors in accordance with the test status.

● Compatible models : LSS-6330A series

USB Optical Module Kit MODEL : 07-00022A



Connection adapter used for remotely controlling the simulator from a PC. Equipped with USB-Optical conversion fiber optic cable (5m).

● Compatible models : LSS-F03 series, LSS-6330A series

AC Line Input Cable (Single phase) MODEL : 05-00134A

DC line input cable MODEL : 05-00136A

AC line input cable (3-phase) MODEL : 15-00135A

Options

Arrester capacitor unit MODEL : 08-00012A



Arrester unit for surge decoupling.

● Compatible models : LSS-F03 series

Arrester capacitor unit MODEL : 08-00016A



Arrester unit for surge coupling

● Compatible models : LSS-F03 series

Telecom waveform check cable set MODEL : 05-00150A





Jig used for measuring the output waveform from the CDN for telecom line.

The following equipment is required additionally.

- Oscilloscope (with differential operation function)
- High voltage probe (when measuring surge voltage / withstand voltage required)
- Current probe (when measuring surge short-circuit current)
- Isolation transformer (for oscilloscope)

● Compatible models : LSS-F03 series

Surge waveform measurement (measurement example at the telecom line CDN terminal at 05-00150A)

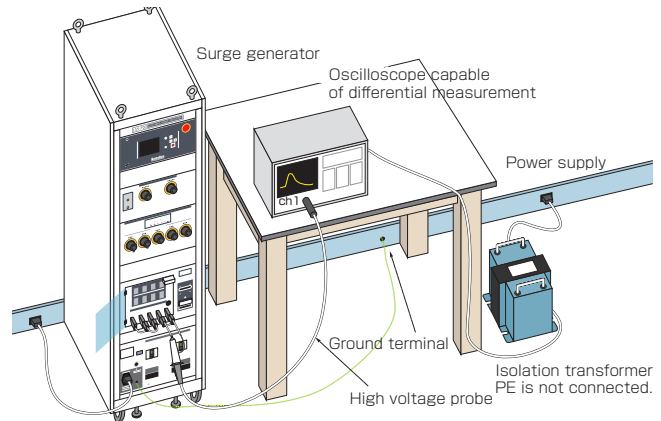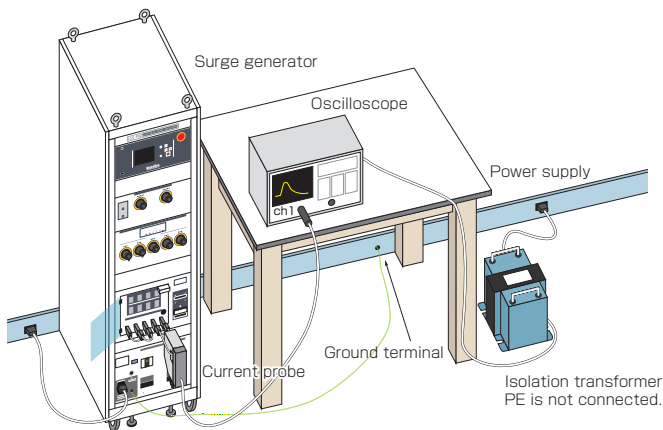

Lightning Surge LSS

Waveform Checking Cables Set MODEL : 05-00099A





Jig for checking voltage waveforms and current waveforms of LSS-F03 series.

Followings are necessary for the checking additionally.

- Oscilloscope (Differential operation function built-in)
- High voltage probes (for surge voltage measurement / Voltage resistibility necessary)
- Current probe (For surge short current measurement)
- Isolation transformer (for oscilloscope)
- Earth cable (for PE connection)

Surge Waveform Measurement (Setup of measurement from SURGE OUT with 05-00099A)

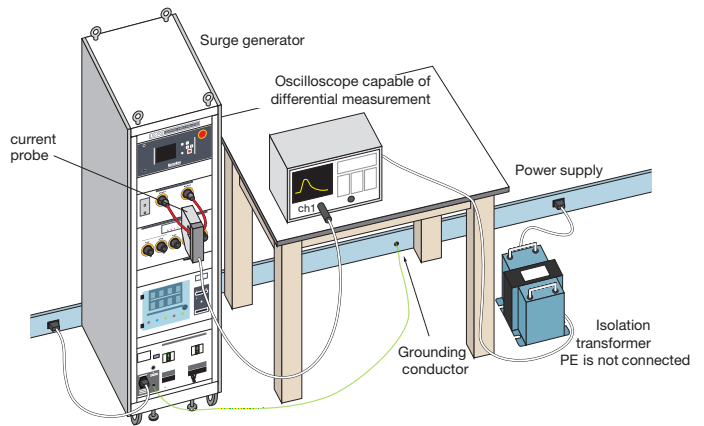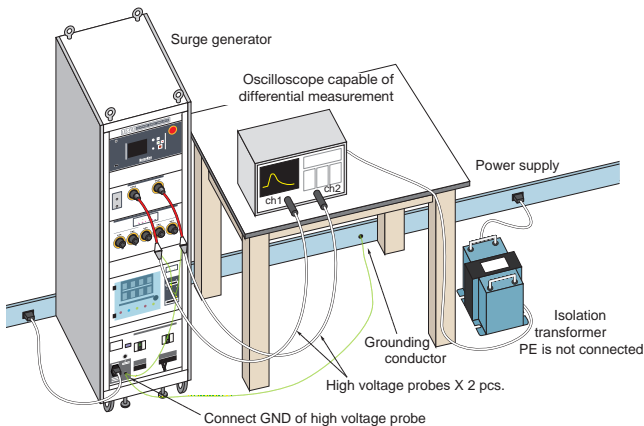

* Measurement of short current waveform from AC /DC CDN is not possible with the waveform pre-checking cables set (05-00099A)

IEC61000-4-5 Ed.3 Test Standard Overview

1. General

The task of the described laboratory test is to evaluate malfunctions of EUT under specified operational conditions to unipolar one-way surges caused by switching and lightning induction effects at certain threat levels. This standard specifies 2 kinds of the combination waveforms. One is simulating injection to power supply lines and interconnections lines (1.2/50µs voltage waveform and 8/20µs current waveform) and the other simulates injection to telecommunication equipment connect to outdoor telephone lines (10/700µs voltage waveform and 5/320µs current waveform).

It is not intended to test the capability of EUT's insulation to withstand high-voltage stress or direct injections of lightning currents, i.e., direct lightning strikes.


2. Test Levels

Level	Open-circuit test voltage kV	
	Normal mode	Common mode
1	-	0.5
2	0.5	1.0
3	1.0	2.0
4	2.0	4.0
x	special	special

x: Can be any level, above, below or in between the others. The level shall be agreed upon between the manufacturers and users.


3. Waveforms Generator and Waveforms specifications

Generation Circuit

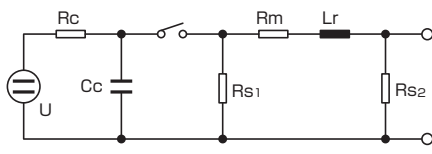


- U High-voltage source
- Rc Charging resistor
- Cc Energy storage capacitor
- Rs Pulse duration shaping resistors
- Rm Impedance matching resistor
- Lr Rise time shaping inductor

Voltage Surge (1.2/50µs)

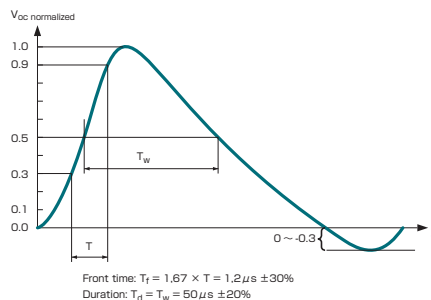

Current Surge (8/20µs)

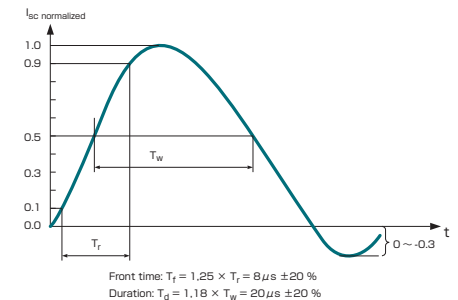

1.2/50µs Combination Waveform specification

	Front time Tf µs	Duration Td µs
Open-circuit voltage	$T_f = 1.67 \times T = 1.2 \pm 30\%$	$T_d = T_w = 50 \pm 20\%$
Short-circuit current	$T_f = 1.25 \times T_r = 8 \pm 20\%$	$T_d = 1.18 \times T_w = 20 \pm 20\%$

4. Voltage waveform specification at the EUT port of power line CDN

1.2/50µs Voltage waveform specification at the EUT port of the power line CDN (open-circuit voltage)

Open-circuit voltage *	Coupling impedance	
	18 µF (line to line)	9 µF + 10 Ω (line to ground)
Peak voltage Current rating ≤ 16 A 16 A < current rating ≤ 32 A 32 A < current rating ≤ 63 A 63 A < current rating ≤ 125 A 125 A < current rating ≤ 200 A	Set voltage +10 %/-10 % Set voltage +10 %/-10 % Set voltage +10 %/-10 % Set voltage +10 %/-10 % Set voltage +10 %/-10 %	Set voltage +10 %/-10 % Set voltage +10 %/-10 % Set voltage +10 %/-15 % Set voltage +10 %/-20 % Set voltage +10 %/-25 %
Front time Duration	1.2 µs ± 30 %	1.2 µs ± 30 %
Current rating ≤ 16 A 16 A < current rating ≤ 32 A 32 A < current rating ≤ 63 A 63 A < current rating ≤ 125 A 125 A < current rating ≤ 200 A	50 µs + 10 µs/ -10 µs 50 µs + 10 µs/ -15 µs 50 µs + 10 µs/ -20 µs 50 µs + 10 µs/ -25 µs 50 µs + 10 µs/ -30 µs	50 µs + 10 µs/ -25 µs 50 µs + 10 µs/ -30 µs 50 µs + 10 µs/ -35 µs 50 µs + 10 µs/ -40 µs 50 µs + 10 µs/ -45 µs

* A CDN meeting the current rating of the EUT and its relevant waveform specification from this table shall be used.

Lightning Surge LSS

IEC61000-4-5 Ed.3 Test Standard Overview


Current waveform specification at the EUT port of the power line CDN (short-circuit current)

Surge current parameters under short-circuit conditions	Coupling impedance	
	18 μF (line to line)	9 μF + 10 Ω (line to ground)
Front time	$T_f = 1,25 \times T_r = 8\mu\text{s} \pm 20\%$	$T_f = 1,25 \times T_r = 2,5\mu\text{s} \pm 30\%$
Duration	$T_d = 1,18 \times T_w = 20\mu\text{s} \pm 20\%$	$T_d = 1,04 \times T_w = 25\mu\text{s} \pm 30\%$


Relationship between peak open-circuit voltage and peak short-circuit current at the EUT port of the power line CDN

Open-circuit peak voltage +/-10% at EUT port of the CDN	Short-circuit peak current +/-10% at EUT port of the CDN (18 μF)	Short-circuit peak current +/-10% at EUT port of the CDN (9 μF + 10 Ω)
0,5 kV	0,25 kA	41,7 A
1,0 kV	0,5 kA	83,3 A
2,0 kV	1,0 kA	166,7 A
4,0 kV	2,0 kA	333,3 A


Single phase power line CDN (line-to-line mode)

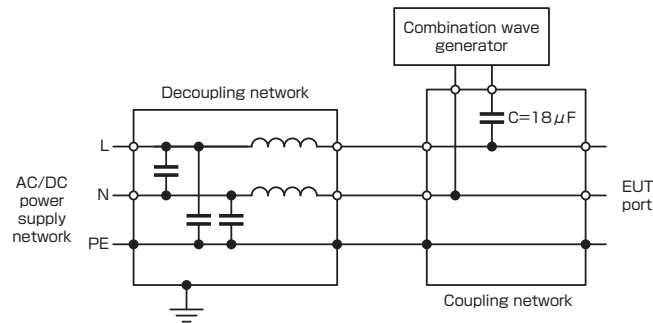


Single phase power line CDN (line-to-ground mode)

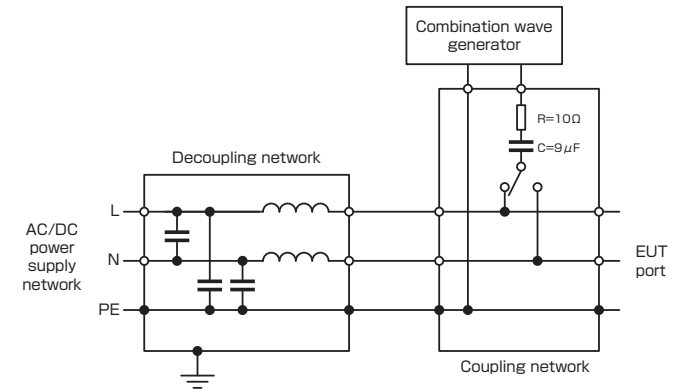

Three-phase power line CDN (line-to-line mode)

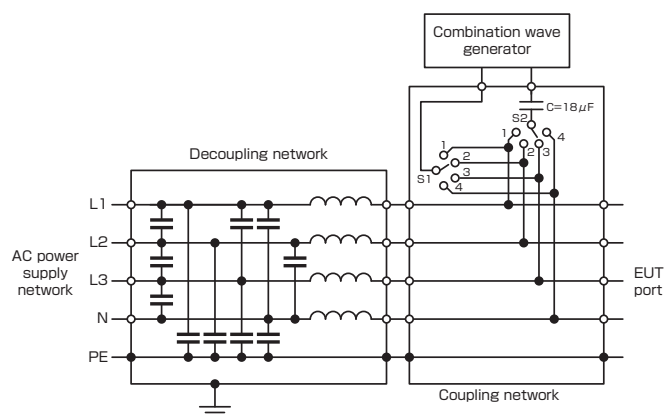


Three-phase power line CDN (line-to-ground mode)

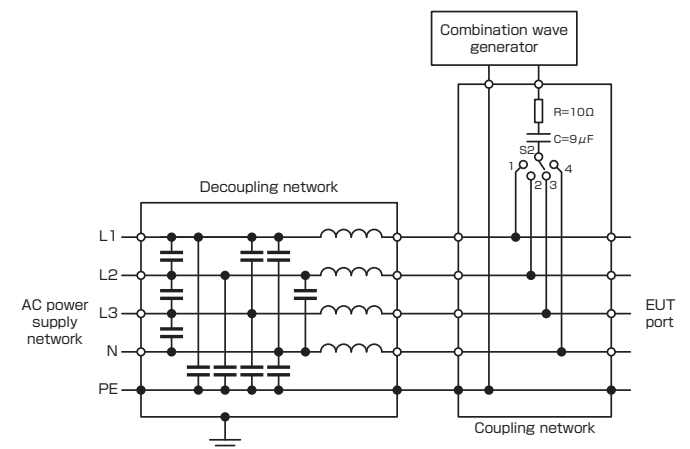


Lightning Surge I SS

IEC61000-4-5 Ed.3 Test Standard Overview


■ CDN for unshielded unsymmetrical interconnection lines

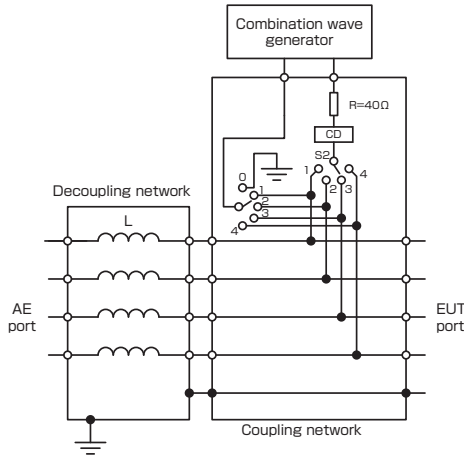

■ CDN for unshielded symmetrical interconnection lines

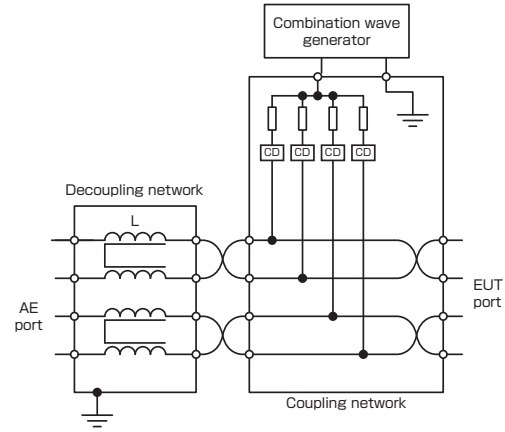

■ CDN for unshielded symmetrical high speed communication lines up to 1000Mbit/s

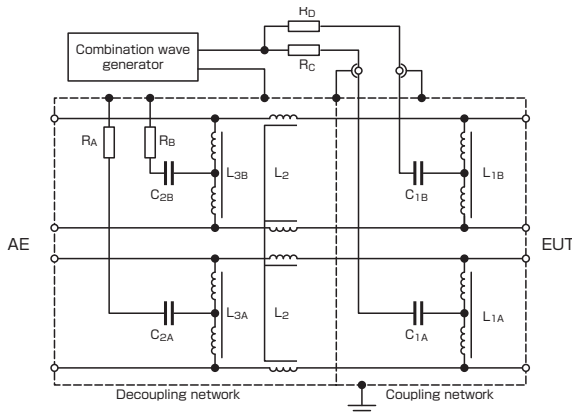

■ Surge waveform specifications at the EUT port of the CDN for unshielded unsymmetrical interconnection lines

Coupling method	Output voltage from the generator	Open-circuit Voltage at the EUT port of the CDN V_{oc} $\pm 10\%$	Voltage front time $T_f = 1,67 \times Tr$ $\pm 30\%$	Voltage duration $T_d = Tw$ $\pm 30\%$	Short-circuit current at the EUT port of the CDN I_{sc} $\pm 20\%$	Current front time $T_f = 1,25 \times Tr \pm 30\%$	Current Duration $T_d = 1,18 \times Tw$ $\pm 30\%$
Line to PE $R = 40 \Omega$, $CD = 0,5 \mu F$	4 kV	4 kV	1,2 μs	38 μs	87 A	1,3 μs	13 μs
Line to PE $R = 40 \Omega$, $CD = GDT$	4 kV	4 kV	1,2 μs	42 μs	95 A	1,5 μs	48 μs
Line-to-line $R = 40 \Omega$, $CD = 0,5 \mu F$	4 kV	4 kV	1,2 μs	42 μs	87 A	1,3 μs	13 μs
Line-to-line $R = 40 \Omega$, $CD = GDT$	4 kV	4 kV	1,2 μs	47 μs	95 A	1,5 μs	48 μs

■ Surge waveform specifications at the EUT port of the CDN for unshielded symmetrical interconnection lines

Coupling method	Output voltage	Open-circuit Voltage at the EUT port of the CDN V_{oc} $\pm 10\%$	Voltage front time $T_f = 1,67 \times Tr$ $\pm 30\%$	Voltage duration $T_d = Tw$ $\pm 30\%$	Short-circuit current at the EUT port of the CDN I_{sc} $\pm 20\%$	Current front time $T_f = 1,25 \times Tr$ $\pm 30\%$	Current Duration $T_d = 1,18 \times Tw$ $\pm 30\%$
Line to PE $R = 40 \Omega$ Coupling devices*	2 kV	2 kV	1,2 μs	45 μs	48 A	1,5 μs	45 μs


* GDT, Clamping device, Avalanche devices

It is recommended that the CDN calibrated at the highest rated voltage. The values shown in the table are for a set value of 4 kV. If the CDN is rated for another maximum voltage, the calibration shall be performed at that maximum voltage. (In case the maximum voltage is 6kV, multiply the short circuit current value shown in this table by 1.5.)

IEC61000-4-5 Ed.3 Test Standard Overview

5. Test Setup

Application of surges to power supply lines

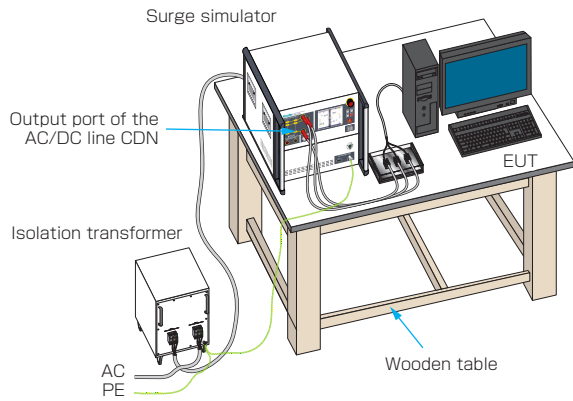

The 1.2/50 combination wave specified in the IEC61000-4-5 standard is applied from Lightning Surge simulator's CDN to power supply of the EUT. Compliant with the standard requirements, the simulator is equipped with a floating output. The simulator can conduct a series of automated tests based on preprogrammed settings.


Application of surges through unshielded unsymmetrical interconnection lines CDN

The 1.2/50 μ s surge generator of the LSS-6330A simulator shall be used in combination with an optional external CDN. This CDN is connected between the EUT and AE (auxiliary equipment).


For all tests shown here, if it is not otherwise specified, the length of cable between the EUT and CDN should not exceed 2m.

Application of surges to shielded lines


In case of shielded lines, the surge shall be applied to the metallic enclosure of the EUT (for the EUT without a metallic enclosure, the surge shall be applied to the shields of the cable).

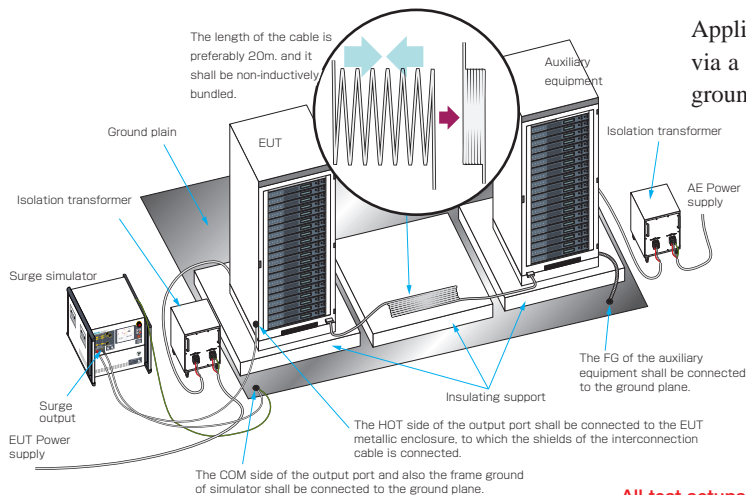


Application of surges to telecom lines

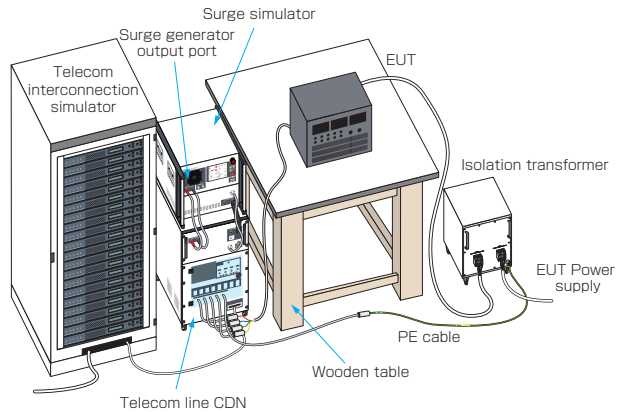

The 1.2/50 combination wave surge specified in IEC 61000-4-5 Standard is applied to the telephone line of an EUT (such as a facsimile machine) through a high-speed telecom CDN connected to Lightning Surge simulator.

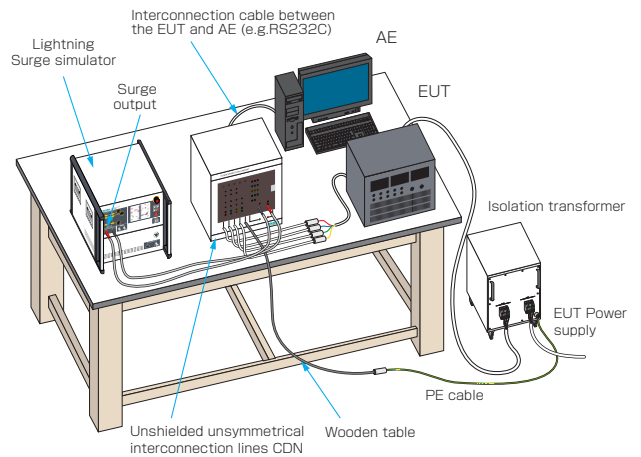

Application of the surges shall be done from the generator output port via a 18 μ F capacitor. The auxiliary equipment shall be connected to the ground plane while the EUT shall not.

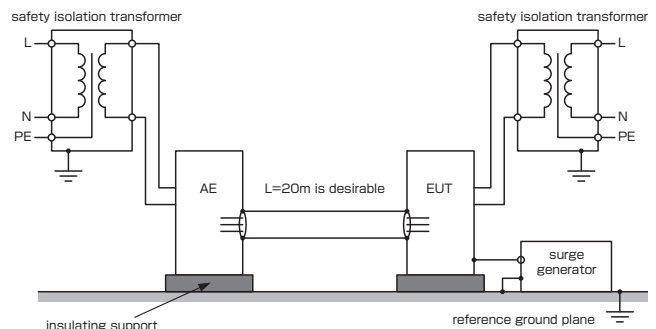

All test setups shown here are examples for performing tests by using the LSS-6330A series simulators. Some parts are not requirements of the relevant IEC standard.

IEC61000-4-5 Ed.3 Test Standard Overview

6. Test procedure

■ Execution of the test

- Number of surges
For DC power ports and interconnection lines five positive and five negative surge pulses.
For AC power ports five positive and five negative pulses each at 0°, 90°, 180° and at 270°;
- Time between successive pulses: 1 min or less

7. Evaluation of Test Results and Test Report

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product. The recommended classification is as follows:

- 1) Normal performance within limits specified by the manufacturer, requestor or purchaser;
- 2) Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- 3) Temporary loss of function or degradation of performance, the correction of which requires operator intervention;
- 4) Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

Generally, as far as the EUT can be immune to the surges injected during all injection period and it satisfies the functional requirements according to the product specification, the test result can be judged as "Good".


The test report shall contain the test conditions and the result.

Note: These test setups and procedures are quoted from IEC61000-4-5 Ed.3 (2014) Standard. Please refer to the standard if more details are required.

8. Surge testing for unshielded outdoor symmetrical communication lines


The 3rd edition of the standard requires the 10/700 us combination wave to be applied to ports connected to outdoor telecommunication lines only and the Annex A (Normative) dedicatedly address this test. Outdoor telecommunication lines are typically greater than 300m in length, as the result of this length 10/700µs wave is more representative. Telecommunication lines are usually protected by a primary protector installed at the cable entry to building. Testing shall be performed including the intended primary protector.

■ 10/700 combination waveform (10/700 · 5/320µs) generation circuit

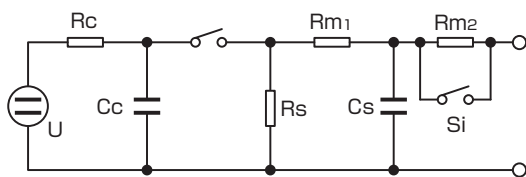


- U High-voltage source
- Rc Charging resistor
- Cc Energy storage capacitor
- Rs Pulse duration shaping resistor
- Rm Impedance matching resistors
- Cs Rise time shaping capacitor
- Si Switch closed when using external matching resistors

■ Open circuit voltage waveform

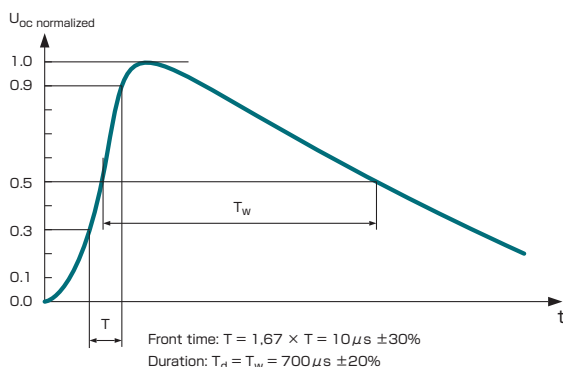

■ Short circuit current waveform

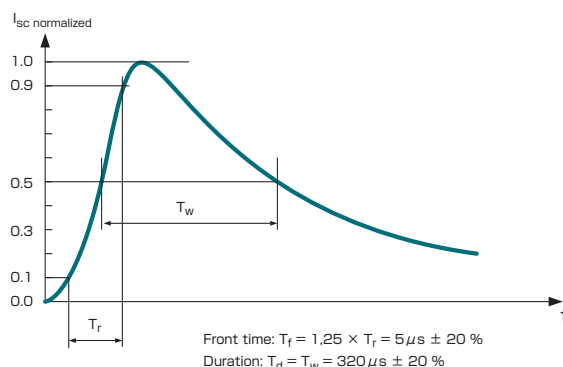

IEC61000-4-5 Ed.3 Test Standard Overview



Definitions of the waveform parameters of 10/700 μ s combination waveform

	Front time μ s	Duration μ s
Open-circuit voltage	10 \pm 30 %	700 \pm 20 %
Short-circuit current	5 \pm 20 %	320 \pm 20 %

Relationship between peak open-circuit voltage and peak short-circuit current of the 10/700 μ s combination waveform

Peak open-circuit voltage at generator output \pm 10 %	Peak short-circuit current at generator output \pm 10 %
0,5 kV	12,5 A
1,0 kV	25A
2,0 kV	50A
4,0 kV	100A

Test setup example for 10/700 μ s generator and CDN for outdoor unshielded symmetrical communications lines

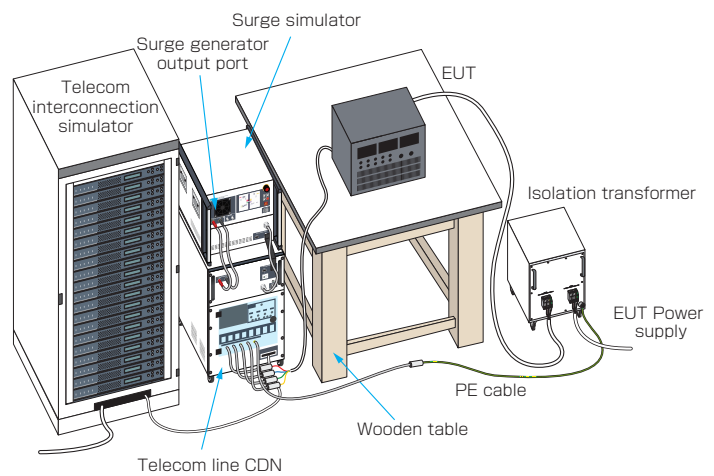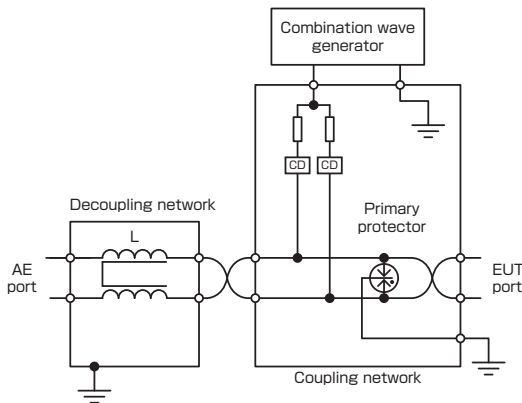

Lightning Surge I SS

Surge waveform specifications at the EUT port of the CDN for unshielded outdoor symmetrical communication lines

Coupling method	Output voltage from the generator	Open-circuit voltage at the EUT port of the CDN V_{oc} \pm 10 %	Voltage front time $T_f = 1,67 \times T_r$ \pm 30 %	Voltage duration $T_d = T_w$ \pm 30 %	Short-circuit current at the EUT port of the CDN I_{sc} \pm 20 %	Current front time T_f \pm 30 %	Current duration T_d \pm 30 %
Common mode Coupling devices 1 pair 27,5 Ω	4 kV	4 kV	8 μ s	250 μ s	145 A	3,2 μ s	250 μ s

Note: These test setups and procedures are quoted from IEC61000-4-5 Ed.3 (2014) Standard. Please refer to the standard if the more details are required.

For Lightning Surge Simulator

CDN UNIT (AC600V / 300A)

This equipment can be combined with the LSS-F03 series lightning surge simulators to perform noise superimposition tests on three-phase four-wire (L1, L2, L3, N) lines up to AC600V / 300A.

* This product is a custom product. Please contact us for details.

Parameter	Function / performance	Note
Allowable input surge waveform	1.2/50 μ s-8/20 μ s combination waveform	
Allowable input surge waveform	Up to the max value that can be set	
Coupling circuit	18 μ F \pm 10%	Line-to-line
IEC 61000-4-5 compliant	10 Ω +9 μ F \pm 10%	Line-PE
AC superimposition part	Open circuit voltage : 0.5kV \sim 15kV \pm 10%	Coupling circuit : 18 μ F
Output waveform	Wave crest length : 1.2 μ s \pm 30%	Decoupling coil : 1.5mH
	Wave tail length : 50 μ s +10 μ s / -25 μ s	Cable length : 0.5m on one side
	Short-circuit current : 250A \sim 7500A \pm 10%	Setting is possible from 0kV
	Wave crest length : 8 μ s \pm 20%	Line input side open
	Wave tail length : 20 μ s \pm 20%	
	Open circuit voltage : 0.5kV \sim 15kV + 10/-20%	Coupling circuit : 10 Ω +9 μ F
	Wave crest length : 1.2 μ s \pm 30%	Decoupling coil : 1.5mH
	Wave tail length : 50 μ s +10 μ s / -40 μ s	Cable length : 0.5m on one side
	Short-circuit current : 41.7A \sim 1250A \pm 10%	Setting is possible from 0kV
	Wave crest length : 2.5 μ s \pm 30%	Line input side open
	Wave tail length : 25 μ s \pm 30%	
Apply mode	Line-to-line	Coupling circuit : 18 μ F (10 Ω +9 μ F selectable)
	Line-PE	Coupling circuit : 10 Ω +9 μ F (18 μ F selectable)
EUT power line configuration	Three-phase AC : L1/L2/L3/N/PE	
EUT power line power capacity	AC600V/300A MAX 50/60Hz	
Decoupling coil	1.5mH	
External dimensions	W555 \times H1800 \times D790 mm	



For Lightning Surge Simulator

DC power supply CDN (DC500V 60A)

This equipment can be combined with the Lightning Surge Simulator to perform noise superimposition tests up to DC 500 V / 60 A. In combination with the Lightning Surge Simulator main unit, tests can be performed by setting the applied phase switching and applied phase sweep.

- By using EV Fast Charger connectors for the EUT line INPUT/OUTPUT, DC power supply superimposition tests can be easily performed in combination with a lightning surge tester.
- This equipment can be controlled by operating the Surge Simulator.

Customization up to DC1000V is available.

Parameter	Function / performance	Notes
Superimposed surge waveform	1.2/50 μ s - 8/20 μ s combination waveform	
Max. superimposed surge voltage/ current	4.5kV	
Coupling circuit	18 μ F \pm 10%	Line - Line
DC CDN output waveform	Open circuit voltage : 0.5kV \sim 4.5kV \pm 10%	Coupling circuit : 18 μ F
	Wave crest length : 1.2 μ s \pm 30%	Decoupling coil : 1.5mH
	Wave tail length : 50 μ s +10 μ s / -10 μ s	Cable length : 0.5m on one side
	Short-circuit current : 250A \sim 2250A \pm 10%	Line input side open
	Wave crest length : 8 μ s \pm 20%	
	Wave tail length : 20 μ s \pm 20%	
Applied mode	Line - Line	Coupling circuit : 18 μ F
EUT power line configuration	DC : + / -	
EUT power line power capacity	DC500V/60A	
Decoupling coil	1.5mH (default)/1.3mH/1.0mH/0.8mH	

* This is a custom product.
It may be necessary to modify the Simulator's main unit. Prior technical discussion is advised.
Please contact our sales representative for more details.



Lightning Surge LSS

Lightning Surge Simulator (AC500V/200A DC600V/200A)

- Compliant with IEC 61000-4-5 Ed.3 standard : ECE R10 is regulated at Ed.2, possible to switch to Ed.2
- AC500V/200A DC600V/200A built-in coupling decoupling network.
- Built-in EV relay welding protection diode in DC line.
You can evaluate the lightning surge resistance when charging EV / PHV vehicles, which is required by ECE R10-04 / 05. (EV Fast Charging applicable)
- Maximum output voltage 15kV: In the reliability evaluation test of the lightning surge test, the evaluation including the destructive test can be performed.
- Adopt a large LCD screen operation panel: A large LCD panel screen has been adopted for the operation unit to improve visibility and operability.
- Employs MPU control that simplifies continuous testing: Surge output / waveform switching / polarity switching / sequence operation can be performed automatically.
- Equipped with manual and program modes. Manual mode for standard tests and single condition tests, and Program mode for continuous tests under different conditions. You can easily set test conditions according to your application.
- Excellent safety functions including interlock
- Equipped with waveform check terminal as standard
- You can check the output waveform with your oscilloscope and BNC cable.
- Isolation transformer required to protect the power supply for EUT is available. (option)
- Possible to switch the constant of the decoupling circuit in order to prevent resonance with the power supply.
- Possible to switch to a circuit not including 18 μ F in the surge output of IEC61000-4-5 (Edition 2.0 2005 version).



Lightning Surge LSS

* This product is a custom product. Please contact us for details.

Customization up to DC1000V is available.

■ Surge generating unit (1.2/50 μ s-8/20 μ s Combination waveform)

Parameter	Function / performance
Open-circuit voltage	0.5kV ~ 15kV \pm 10%
Open circuit voltage	Wave crest length : 1.2 μ s \pm 30% Wave tail length : 50 μ s \pm 20%
Short circuit current	250A ~ 7500A \pm 10%
Current waveform	Wave crest length : 8 μ s \pm 20% Wave tail length : 20 μ s \pm 20%
Output polarity	Positive / negative
Output impedance	2 Ω \pm 10%
Surge generation circuit method	Floating
Minimum charging time	0.0kV -6.0kV : 10 s 6.1kV -15.0kV : 20 s

■ AC/DC CDN

Parameter	Function / performance
CDN Surge waveform	1.2/50 μ s-8/20 μ s combination waveform
Max CDN surge voltage / current	Up to the max value that can be set
Coupling circuit IEC 61000-4-5 compliant	18 μ F :Line-to-line (10 Ω +9 μ Fselectable) 10 Ω \pm 9 μ F :Line-PE (18 μ Fselectable)
Apply mode	Line-to-line, Line-PE
EUT power line configuration	Three-phase AC/DC :L1/L2/L3/N/PE (Single / three-phase) +/-PE
EUT power line configuration	AC500V/200A MAX 50/60Hz, DC600V/200A MAX
Decoupling coil	1.5mH (standard)/ 1.3mH/1.0mH/0.8mH
Phase angle control	0 ~ 360° \pm 10°

■ Other

Parameter	Function / performance
Voltage monitor	BNC output, 1/2000 \pm 10% (when the surge out setting output is open-circuit)
Current monitor	BNC output, 1mV/A \pm 10% (when the surge out setting output is short-circuit)
Driving power supply	AC100V ~ AC240V \pm 10% 50Hz / 60Hz
External dimensions	W1034 \times H1640 \times D918 mm

Lightning Surge Simulator

LSS-720B2

Features

This simulator simulates "high-energy induced lightning noise" induced in distribution lines and communication lines due to ground potential fluctuations caused by lightning strikes, and evaluates the resistance of electronic devices.

It is possible to check the dielectric strength due to induced lightning at a level that cannot be confirmed with the combination waveform required by the IEC standard.

- **Lightning surge simulator (Generator) conforming to JEC 210 / 212 Standard**
- **Maximum output voltage : 20 kV**
Enables verifying dielectric strength against induced lightning surge which level cannot be available with the combination surge simulators
- **Maximum output current : 4000 A**
Enables conducting testing for surge absorbers for their current handling capability
- **Enables observing the output waveform only with an oscilloscope at hand and 1 / 10 voltage probes since 1 / 100 waveform check terminal is standard equipped**
- **Isolation transformer built-in so that the primary power input and EUT can be easily connected**



Specifications

Parameter	Specification	
Voltage surge	Output waveform	1.2/50 μ s
	Max. output voltage	20 kV
	Polarity	Positive or negative
	Output impedance	6 Ω \pm 10 %
	Built-in load resistance	50 Ω \pm 10% (Current limit resistance 100 Ω)
	Short current at max. output	3300 A
Current surge	Output waveform	8 / 20 μ s
	Max. output current	4000 A
	Polarity	Positive or negative
	Output impedance	5 Ω \pm 10%
	Built-in load resistance	3 k Ω \pm 10%
Surge repetitive cycle single output	Single output	
EUT power capacity	Single phase 240 V / 20 A	
Dimensions	(W) 555 \times (H) 1860 \times (D) 840 mm	
Weight	Approx. 450 kg	

Accessories

Parameter	Model number	Q'ty
Bag for accessories		1 pc.
Power cable		1 pc.
Surge ground cable		1 pc.
Switch for external trigger	04-00003A	1 pc.
Surge output cable		1 pc.
Single phase input cable	05-00003A	1 pc.
Check terminal	02-00023A	1 pc.
Residual voltage discharge probe		1 pc.
Warning lamp		1 pc.
Fuse		2 pcs.
Output cable	05-00015A	2 pcs.
Interlock connector		1 pc.
Instruction manual		1 volume
Switch key		2 pcs.
Waveform switching connection bar		6 pcs.

JEC Standard Overview

Standard



Provides dielectric strength test for electronic equipment connected to electric power systems, and specifies test voltage and object circuits for purpose of protection of electric facilities.

■ Examples of Surge Injection to Power Lines


In low voltage control dielectric test method, test voltage induction and voltage resistibility test against lightning surge impulse specified in JEC-210 (The Institute of Electrical Engineers of Japan / Japanese Electrotechnical Committee), verify whether EUT can be resistible against the lightning impulses (Standardized 1.2/50 μ s) which test conditions are specified in the Standard and which are injected both to the positive and negative each 3 times.

Circuit class NO.	Lightning impulse test voltage (V)			Object circuit
	To ground	Between inter electric circuit	Between contact points and between coil terminals Instrument transformer DC/AC circuits	
1	7	4.5	4.5	Secondary and third circuits in instrument transformer which is used for main circuit (main unit side)
2A	7	3		Operation / Control circuits in breaker or disconnector used for main circuit
2B	5	3		DC100-200V/AC100-400V circuits auxiliary equipment in main unit attached
3	3	3		Secondary and third circuits in instrument transformer of observation / protective relay / remote observation control board, etc.
4	4	4.5	3	DC100-200V/AC100-400V circuits in direct / protective relay / observation control board, etc.
5	4	3		

Block Diagram and Waveforms

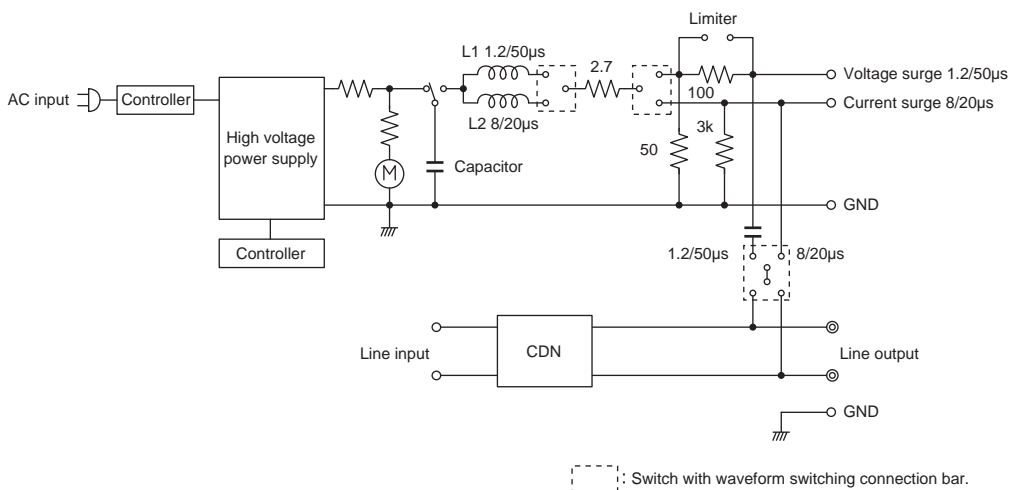

Voltage surge waveform 1.2/50 μ s
Voltage : 3 kV
V : 500 V / Div.
H : 20 μ s / Div.



Current surge waveform 8 / 20 μ s
Current : 2400 A
I : 500 A / Div.
H : 10 μ s / Div.

Voltage Dip & Swell Simulator

VDS-2002




Features

Used to evaluate performance such as malfunctions and functional deterioration due to power supply voltage fluctuations in electronic and electrical equipment.
 Simulates the phenomenon of voltage variations and momentary power failures in commercial power supplies (AC100/200V) and evaluates the resistance of electronic equipment.
 In addition to the requirements of the international standard IEC61000-4-11, it is tested in all industries as a tolerance evaluation against voltage variations and instantaneous interruptions for electronic equipment.

- Voltage dip & swell simulator conforming to EN/IEC61000-4-11 Ed.3 (2020) Standard
- Multiple types AC plug receptacle on the front panel for easy connection of the EUT
- Easy settings for the test parameters on the front panel (Voltage variations test is performed by software.)
- Realize flexible test conditions setting beyond the Standard with a PC remote control
- Allows to conduct the interruption test in DC (DC 125 V / 16 A max)

Specifications

Parameter		Specification		
Compliant Standard		IEC 61000-4-11 (1994) , IEC 61000-4-11 (2004) at Output voltage 0 to 100%		
Number of Phases		Single Phase		
Test Modes	AC/DC Voltage Interruption test Sensing, direct mode	Cycle synchronous/asynchronous setting	PC setting	Short/Open modes selection during interruption
		Cycle synchronous setting	Main Unit setting	Short mode during interruption
	AC voltage dip and swell test Cycle synchronous/asynchronous setting	Cycle synchronous/asynchronous setting	PC setting	
		Cycle synchronous setting	Main Unit setting	
EUT	Input voltage range	AC90~264V 50/60Hz, DC0~125V ※3		
	Output voltage range	AC0V~input voltage+20%, DC0V~input voltage AC290Vmax ※2		
Output VA rating		4.224kVA (continuous)		
Output current capability	AC	100% of input voltage	16Arms (continuous)	
		80% of input voltage	20Arms (<5s)	
		70% of input voltage	23Arms (<5s)	
		40% of input voltage	40Arms (<5s)	
	DC	16A (continuous)		
MAX Output current capability	AC100~120V	250A peak Output voltage 100%, <10ms in direct mode		
	AC220~240V	500A peak Output voltage 100%, <10ms in direct mode		
Load regulated Output voltage variation	100% of input voltage 0-16 Arms	<5%		
	70% of input voltage 0-23 Arms	<5%		
	70% of input voltage 0-23 Arms	<5%		
	100% of input voltage 0-40 Arms	<5%		
Overshoot / undershoot		<5% 100 ohm loaded in the Sensing Mode		
Rise time / fall time		1~5 μs 100 ohm loaded		

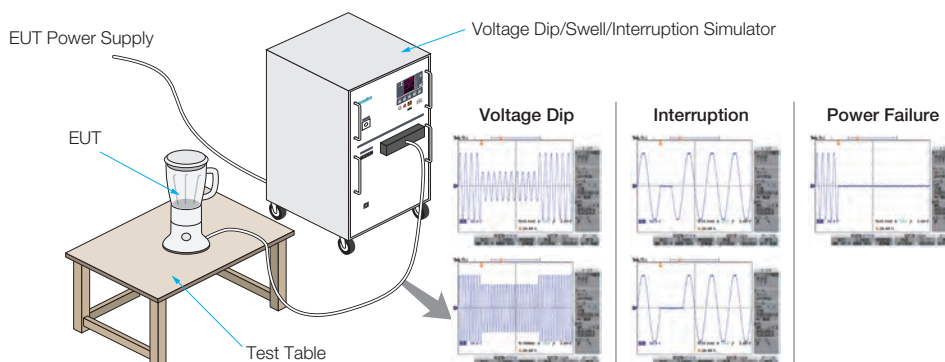

Voltage Variation
VDS

VDS-2002

Parameter			Specification
BASE VOLTAGE	Percent Setting	PC setting	(4%)~120% percentage with a minimum value of 10V ※1 ※2
		main unit setting	100% ※1
	Voltage Setting	PC setting	10~290V (0V~input voltage+20%) 5Vstep ※2 arbitrary setting 1V step
		Accuracy	±5V Output current 0 to 16A
TEST LEVEL (Interruption, dip, swell)	Percent Setting	PC setting	Short/Open selectable for 0% 0~120% ※1
		main unit setting	Short/Open selectable for 0% 0, 40, 70, 80, 120% 5V step ※1
	Voltage Setting	PC setting	Short/Open selectable for 0% 0~290V (0V~5V step+20%) 5V step ※2 arbitrary setting 1V step
		Accuracy	±5V Output current 0 to 16A
REPEAT COUNT	No. of Events setting	PC setting	1-1000 or continuous (0) 1 event step
		main unit setting	1, 3, 5, 10, 30, 50, 100, or continuous(Cnt) 8 steps
INTERVAL CYCLES	CYCLE Setting	Synchronous	PC setting main unit setting
		Asynchronous	PC setting
	s Setting	Synchronous	PC setting
	m s Setting	Asynchronous	PC setting
DIP CYCLES (voltage interruptions, dip cycles)	CYCLE Setting	Synchronous	PC setting main unit setting
		Asynchronous	PC setting
	m s Setting	Synchronous	PC setting
	s Setting	Asynchronous	PC setting

Parameter			Specification	
DIP PHASE (voltage interruptions, dip starting phase)	Phase Angle setting	Synchronous	PC setting	0~360° 1° steps
			main unit setting	0, 45, 90, 135, 180, 225, 270, 315, 360° 9 steps (45° steps)
	Time Setting	Asynchronous	PC setting	0~19.9ms 0.1ms steps 50Hz 0~16.6ms 0.1ms steps 60Hz
			main unit setting	0.1s~10s 0.1s steps output voltage 0~120%
Memory capacity	PC setting	main unit setting	Up to 10 tests can be programmed and stored as long as the recording media such as PC HD, FD, etc. allow. 5 tests	
Input voltage from EUT			AC100~240V±10% 50/60Hz	
Interface			Optical interface Optional optical converter RS-232 or USB selection	
Operating temperature			15~35°C	
Operating humidity			25~75%R.H. (no condensation)	
External dimensions / Weight			(W)430×(H)745×(D)600mm (excluding protrusions) / approx.150kg	
Power consumption			120VA (AC100~240V 50/60Hz)	



※ 1 : percent against input voltage

※ 2 : not compliant to IEC 61000-4-11(1994) and IEC 61000-4-11 Ed2 (2004) , ed.3 (2020) Standards when voltage output is >100%

※ 3 : The input voltage must be free of distortion and voltage variations.

VDS-2002

Front Panel


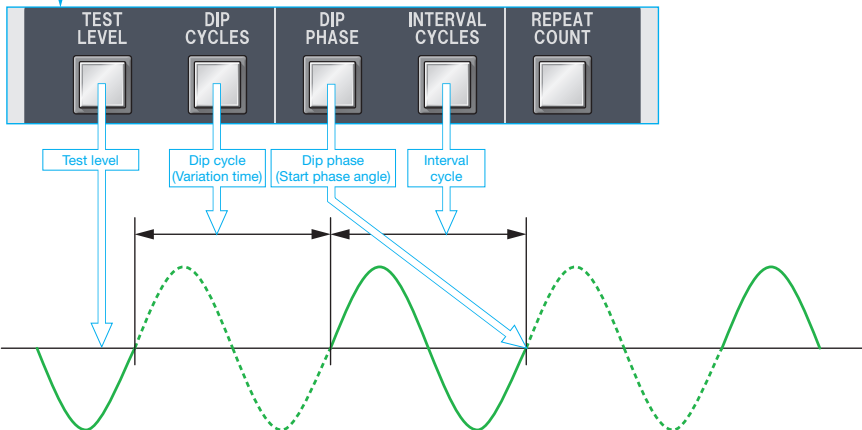
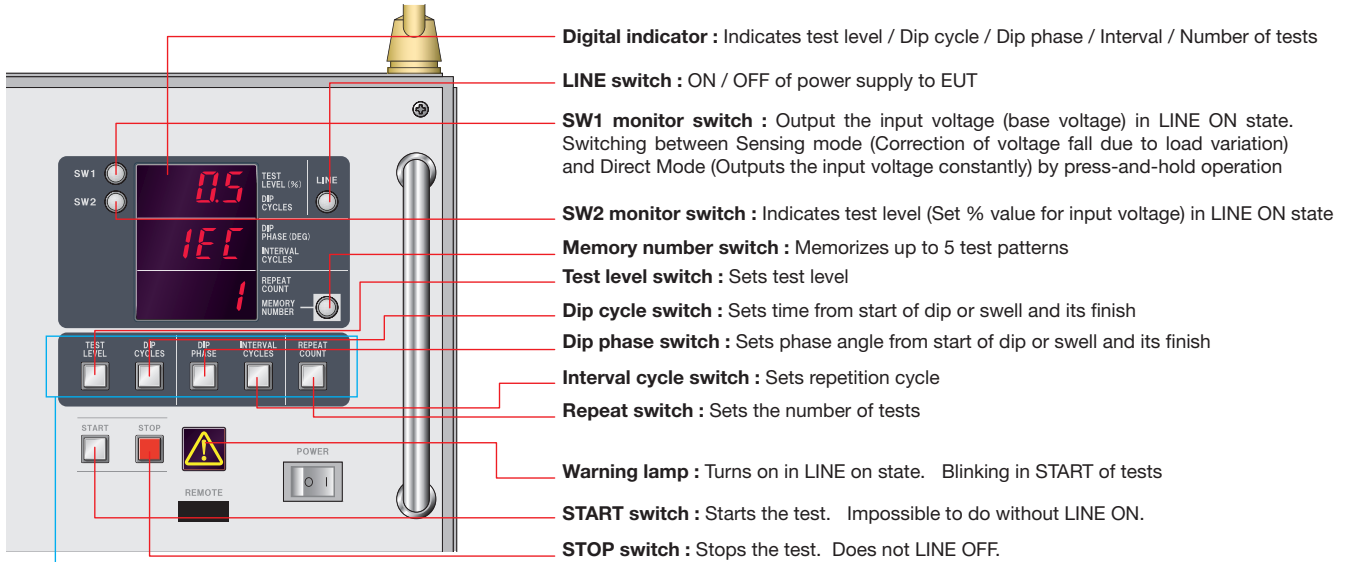


Options

Software (VDS-2002-PC) MODEL : 14-00036A

Allows standardized test settings and user-defined test settings.

In addition to the IEC test level, there are various setting items such as dip-up cycle, repetition cycle, interval cycle, etc., which greatly supports voltage fluctuation testing.

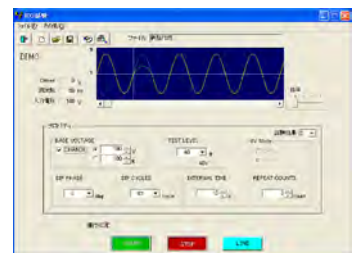

USB Optical Module Kit MODEL : 07-00022A



Connection adaptor used for PC remote control of the simulator.
USB optical conversion, equipped with 5m optical fiber cable

IEC61000-4-11 Ed.3 Test Standard Overview

1. General

Immunity test standard for electrical / electronic equipment which are connected to low voltage power supplies networks whether they are malfunctioned or resistible against voltage dips, short interruptions or voltage variations.

Power capacity of equipment under the test (EUT) shall be 16A per phase. This standard applies to equipment connected to 50/60 Hz AC supply network and does not apply to equipment operating on 400Hz AC.

2. Test Level

- The voltages in this standard use the rated voltage for the equipment (UT) as a basis for voltage test level specification.
- if the voltage range does not exceed 20 % of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for the test level specification (U_T).

1. Voltage dips and short interruptions

Table 1 – Preferred test level and durations for voltage dips

Class ^a	test level and durations for voltage dips (ts) (50 Hz / 60 Hz)				
Class 1	Case-by-case according to the equipment requirements				
Class 2	0% during 1 / 2 cycle	0% during 1 cycle	70% during 25 / 30 ^c cycles		
Class 3	0% during 1 / 2 cycle	0% during 1 cycle	40% during 10 / 12 ^c cycle	70% during 25 / 30 ^c cycle	80% during 250 / 300 ^c cycle
Class X ^b	Special	Special	Special	Special	Special

a. Classes as per IEC 61000-2-4 ; see Annex B

b. Class x can be any level determined by consent between the EUT manufacturer and the simulator supplier

c. "25 / 30 cycle" means "25 cycles for 50 Hz test" and "30 cycles for 60 Hz test"

* Each dip% shall be voltages against the rated voltages


Table 2 – Preferred test level and durations for short interruptions

Class	Test level and durations for short interruptions (ts) (50 Hz / 60 Hz)
Class 1	Case-by-case according to the equipment requirements
Class 2	0% during 250 / 300* cycle
Class 3	0% during 250 / 300* cycle
Class X	Special


a. Classes as per IEC61000-2-4 ; see Annex B

b. Class x can be any level determined by consent between the EUT manufacturer and the user


c. "250/300 cycle" means "250 cycles for 50 Hz test" and "300 cycles for 60Hz test"

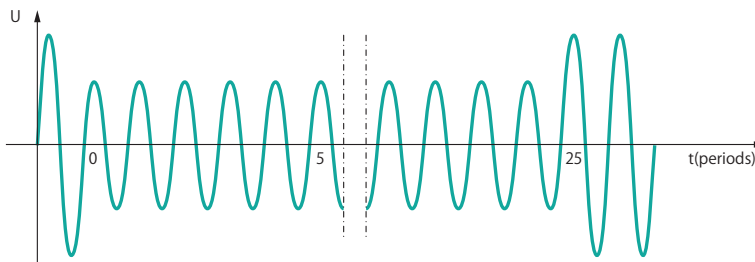

Voltage dip - Example: 70% voltage dip sine wave graph

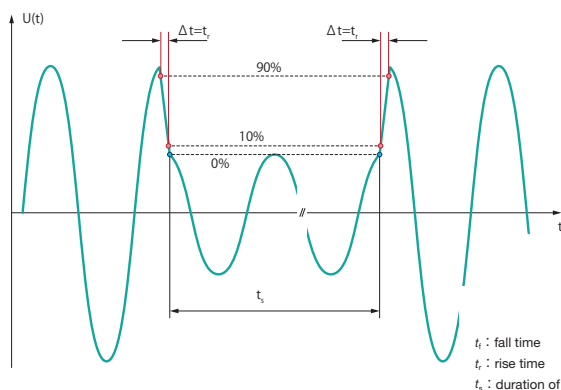

Voltage dip - Example: 40% voltage dip sine wave graph at 90°

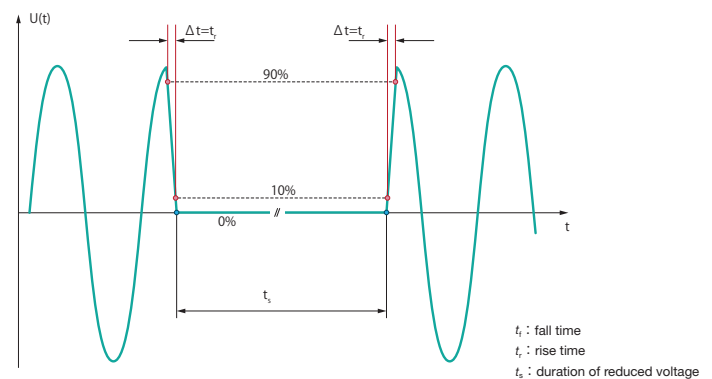

Short interruption

IEC61000-4-11 Ed.3 Test Standard Overview


2. Voltage variations (Optional)

Table 3 – Timing of short-term voltage variations

Voltage test level	Time for decreasing voltage (td)	Time at reduced voltage (ts)	Time for increasing voltage (ti)
70%	Abrupt	1 cycle	25/30 cycles
X	Special	Special	Special

* Class X can be any level determined by consent between the EUT manufacturer and the simulator supplier

* “25/30 cycle” means “25 cycles for 50Hz test” and “30 cycles for 60Hz test”

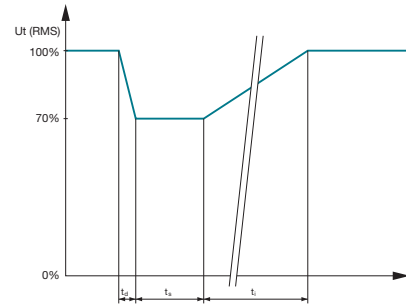


t_d : Time for decreasing voltage
 t_s : time at reduced voltage
 t_i : time for increasing voltage

3. Characteristics and performance of the generator

Output voltage at no load	As required in Table 1, $\pm 5\%$ of residual voltage value
Voltage change with load at the output of the generator	
100% output, 0 A to 16 A	Less than 5% of U_T
80% output, 0 A to 20 A	Less than 5% of U_T
70% output, 0 A to 23 A	Less than 5% of U_T
40% output, 0 A to 40 A	Less than 5% of U_T
Output current capability	16A r.m.s per phase at rated voltage. The generator shall be capable of carrying 20A at 80% of rated value for a duration of 5s. It shall be capable for carrying 23A at 70% of rated voltage and 40A at 40% rated voltage for a duration of 3s. (This requirement may be reduced according to the EUT rated steady-state supply current. See Clause A. 3).
Peak inrush current capability (no requirement for voltage variation tests)	Not to be limited by the generator. However, the maximum peak capability of the generator need not exceed 1000 A for 250 V to 600 V mains, 500 A for 200 V to 240 V mains, or 250 A for 100 V to 120 V mains.
Instantaneous peak overshoot / undershoot of the actual voltage, generator loaded with 100 Ω resistive load	Less than 5% of U_T
Voltage rise (and fall) time t_r (and t_f) see Figures 1b) and 2, during abrupt change, generator loaded with 100 Ω resistive load	Between 1 μ s and 5 μ s
Phase shifting (if necessary)	0° to 360°
Phase relationship of voltage dips and interruptions with the power frequency	Less than $\pm 10^\circ$
Zero crossing control of the generators	$\pm 10^\circ$

■ EUT Peak Inrush Current requirement

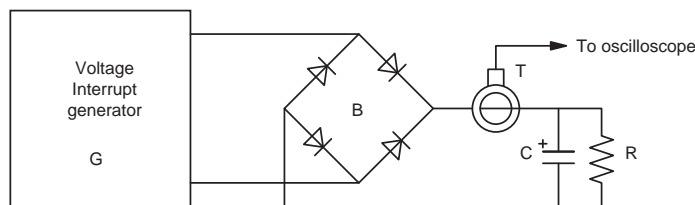

Circuit for determining the inrush current drive capability of the short interruptions generator

Components

- G voltage interrupt generator, switched on at 90° and 270°
- T current probe, with monitoring output to oscilloscope
- B rectifier bridge
- R bleeder resistor, not over 10000 Ω or less than 100 Ω
- C 1700 μ F $\pm 20\%$ electrolytic capacitor

In order to be able to use a low-inrush drive current capability generator to test a particular EUT, that EUT’s measured inrush current shall be less than 70% of the measured inrush current drive capability of the generator.

IEC61000-4-11 Ed.3 Test Standard Overview

4. Test Setup

The test shall be performed with the EUT connected to the test generator with the shortest power supply cable as specified by the EUT manufacturer. If no cable length is specified, it shall be the shortest possible length suitable to the application of the EUT.

5. Test Procedure

■ Execution of the test

- The EUT shall be tested for each selected combination of test level and duration with a sequence of three dips / interruptions with intervals of 10s minimum (between each test event).
- Each representative mode of operation shall be tested.
- For voltage dips, changes in supply voltage shall occur at zero crossings of the voltage, and at additional angles considered critical by product committees or individual product specifications preferably selected from 45°, 90°, 135°, 180°, 225°, 270° and 315° on each phase. For short interruptions, the angle shall be defined by the product committee as the worst case. In the absence of definition, it is recommended to use 0° for one of the phases.
- For voltage variations (Optional), the EUT is tested to each of the specified voltage variations, three times at 10s interval for the most representative modes of operations.

■ Climatic and Electromagnetic Conditions

Ambient temperature	15°C ~ 35°C
Relative humidity	25% ~ 75%
Atmospherical pressure	86 kPa ~ 106 kPa (860 hPa (mbr) ~ 1060 hPa (mbr))
Electromagnetic environment	Level which does not affect the test result

6. Evaluation of Test Results and Test Report

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level defined by its manufacturer or the requestor of the test, or agreed between the manufacturer and the purchaser of the product. The recommended classification is as follows:

- 1) Normal performance within limits specified by the manufacturer, requestor or purchaser;
- 2) Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention;
- 3) Temporary loss of function or degradation of performance, the correction of which requires operator intervention;
- 4) Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

Generally, as far as the EUT can be immune to the surges which is injected in the all specified period and it satisfy the functional requirements according to the product specification, the test result can be judged as “Good”.

The test report shall contain the test conditions and the result.

Notes: This test set-up is quoted from IEC61000-4-11 Ed.3.0 (2020) Standard.
Please refer to the Standard if more details are required.

High Frequency Surge Test (Burst Waveform) SWCS-931SD

A damped oscillatory wave simulator simulates the fast-repeating, high-frequency noise that occurs when switches turn on and off, and evaluates the resistance of electronic and electrical equipment.

Higher reliability and accuracy have been realized comparing to the previous model with adaption of the semiconductor switch.


- A maximum output voltage of 1.5 kV
- Repetition frequency variable from 0.4 Hz to 400 Hz
- Output resistance variable from 50 to 200 Ω (10Ω step)




Specification	
Parameter	Specification
Output waveform	Damped oscillatory wave
Output voltage	100 V ~ 1500 V
Polarity	Positive (1st wave) or negative (short bar switching)
Oscillatory frequency	1.5 MHz ± 0.2 MHz
Time to half-value peak	10 μs ± 20 % (0.1 kV ~ 1.0 kV) 10 μs ± 40 % (1.0 kV ~ 1.5 kV)
Output impedance	50 ~ 200 Ω (10 Ω pitch set possible)
Repetition cycle	0.4 ~ 400 Hz (3-stage switching, continuously variable)
Injection time	1s ~ 10min. or continuous
Coupling capacitor	100 pF / 470 pF
EUT power capacity	-
Power supply	AC 100 ~ 240 V 50 / 60Hz
Dimensions	(W) 430 x (H)200 x (D)400 mm
Weight	Approx. 7 kg

Accessories	
Item	Q'ty
Accessories bag	1 pc.
Instruction manual	1 volume
Power cable	1 pc.
Short bar	1 pc.


Internal Circuit

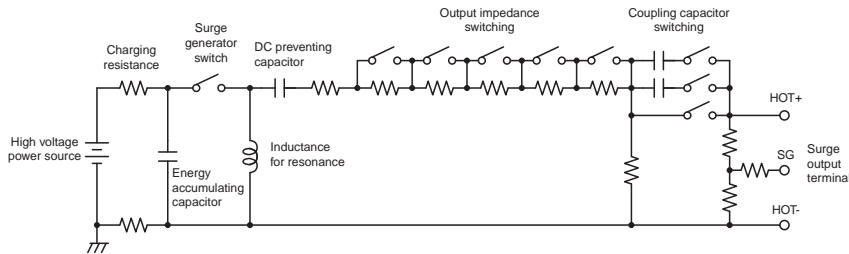

Output Waveform

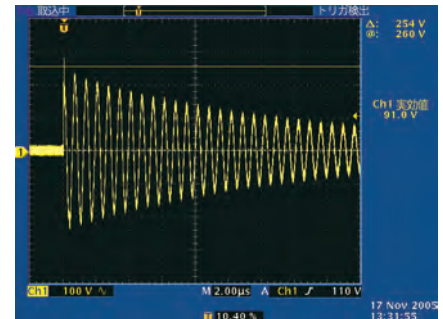

Test Setup

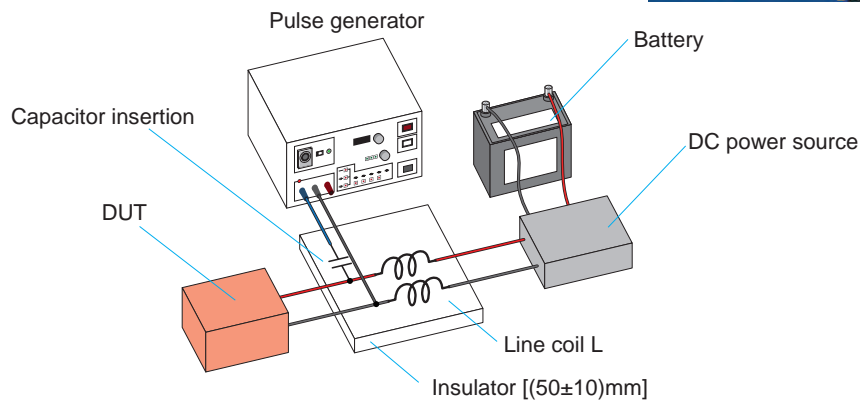

Test procedure example using the damped oscillatory wave simulator

- ① Place the main simulator unit (hereinafter referred to as the Main unit) onto the outside of the ground reference plane.
- ② Connect the included power supply cable to AC IN on the backside of the Main unit.
- ③ Connect the DUT connection cables to HOT and GND terminals of the Main unit (insert a capacitor to HOT side), and connect the other side of the cables are to the testing harnesses. * The connection cables to be prepared by the user.
- ④ Set the injection voltage and other parameters of the controller part of the Main unit's front panel and start the test.

EPS-02Ev3

Electromagnetic Field Visualization System

For effective EMI debugging

EPS is an EMC/EMI debugging tool enabling designers to rapidly perform pre-measurement, failure point identification, and improvement efficiency confirmation in EMC/EMI countermeasure process of product design.


The software detects location of the probe by color detection* through the camera image, performs real-time frequency analysis of the measured signal and displays the electromagnetic field strength superimposed on the actual image of the measured object in form of a heat map.

* Proprietary position detection method to patent application No. 2007-223275 by Kanazawa University and patent No. 5205547 by Noise Laboratory Co., Ltd.

- A real-time diagnostic tool supporting EMC/EMI debugging.
- Swift visualization and analysis of EMC/EMI problems.
- Easy comparison of countermeasures before and after.
- Capable of measurement from entire products to single components.
- User-friendly compact design.
- A system can be constructed using the customer's spectrum analyzer and electromagnetic field probe. (consultation required)



Image recognition (probe tip yellow color recognition)

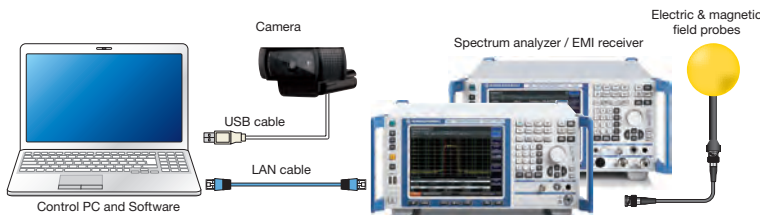


Easy to carry at a lower price!




RSA306B spectrum analyzer is convenient to carry around for on-site measurements. In addition, the system can be constructed at a lower cost.

Various product sizes measurement Various probes applicable

Various types of electromagnetic field probes can be used regardless of the manufacturer. Therefore, by interchanging electromagnetic field probes, it is possible to measure various sizes, from small items such as parts and circuit boards to large equipment such as stationary equipment. In addition, objects with complicated shapes can also be measured by positioning the camera.



- Big-size probes -
Large equipment EM field measurement




- Small precision probes -
Small components and PCB EM field measurement

A wide variety of standard-compliant spectrum analyzer drivers

Added additional spectrum analyzers possible to use, making it easier to use your current spectrum analyzer.

Rohde & Schwarz	Spectrum analyzer	FSV series, FSV3000 series, FPL series
	EMI receiver	ESR series, ESRP series
Keysight Technology	Signal analyzer	N9010A, N9010B
Tektronix	Oscilloscope	MDO4000 series
	Spectrum analyzer	RSA306B

Tektronix MDO4000 series



Tektronix RSA306B




Please inquire about other spectrum analyzers.

Keysight Technology N9010A




Keysight Technology N9010B



Rohde & Schwarz FSV



Rohde & Schwarz FPL



Rohde & Schwarz ESR







EPS-02Ev3


Easily Check the Noise Occurrence Frequency

The density display function expands the range of analysis


Added a function to display colors according to the frequency of occurrence (density display function) to the conventional spectrum display function. This makes it possible to easily check the noise occurrence frequency and the amplitude at the measurement frequency. A wide range of analysis is available, from checking the noise amplitude in regular measurements (using the density display function), to checking the details of areas of concern (noise with large amplitude, intermittent noise, etc.) by spectrogram measurement.

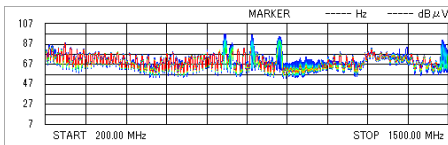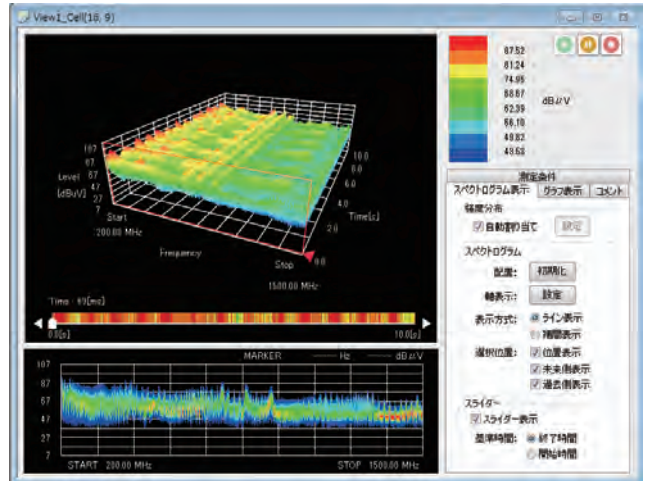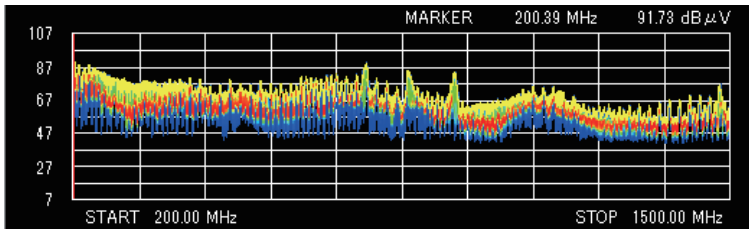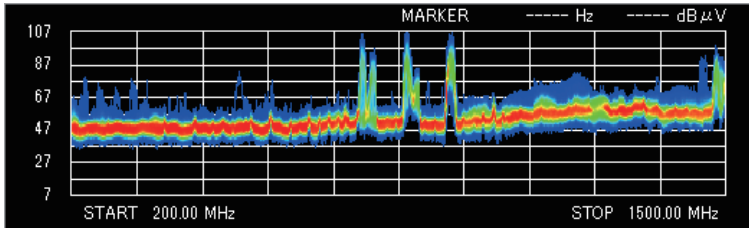

Example of noise with little change

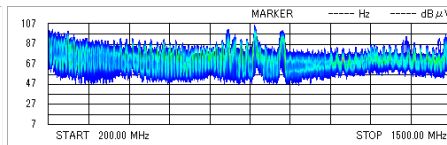

Example of noise with large fluctuation

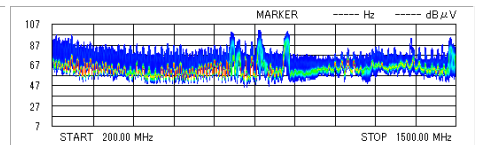


Example of intermittent noise

Simplified EMC/EMI Debugging

Three-Dimensional Indication (Time, Frequency, Amplitude)

In addition to conventional two-dimensional (frequency and level) measurement, three-dimensional (frequency, level, time) measurement is now possible for the space electromagnetic field visualization system that has been well received. This makes it possible to visually confirm changes in noise over time, and analyze noise causing factors such as discovering discontinuous noise.

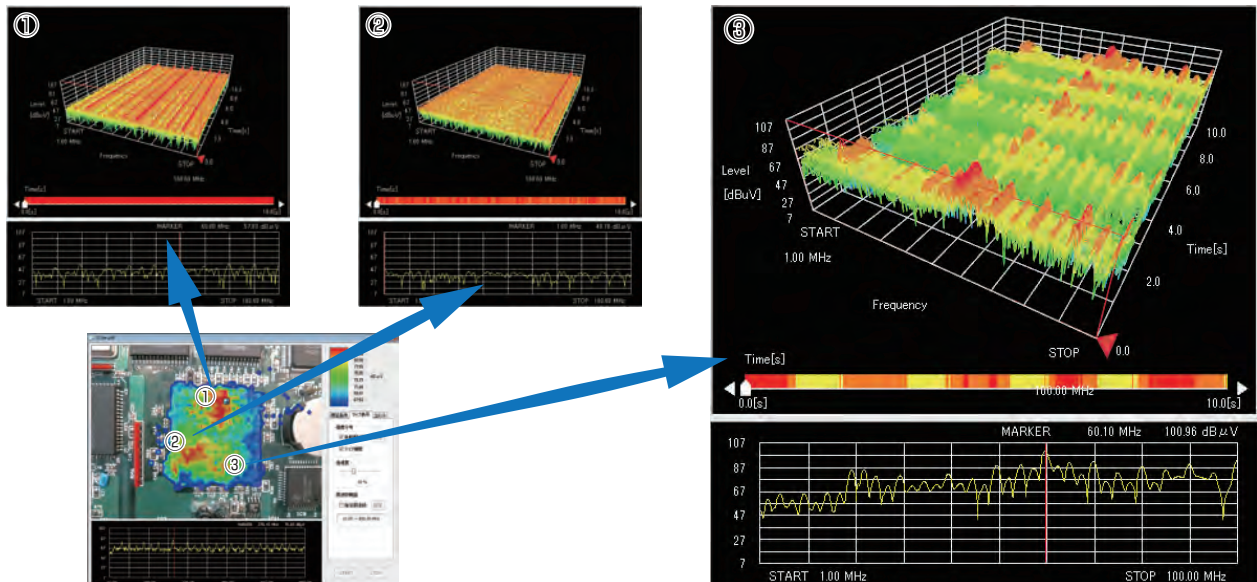


EMI Measure
EPS

Simultaneous waveform display function newly added Real-time spectrum data can be checked at the same time

NEW Function
Ver.3.2.0.0

It is now possible to display FREE RUN waveforms simultaneously when displaying MAX HOLD or MAX PEAK DATA waveforms.

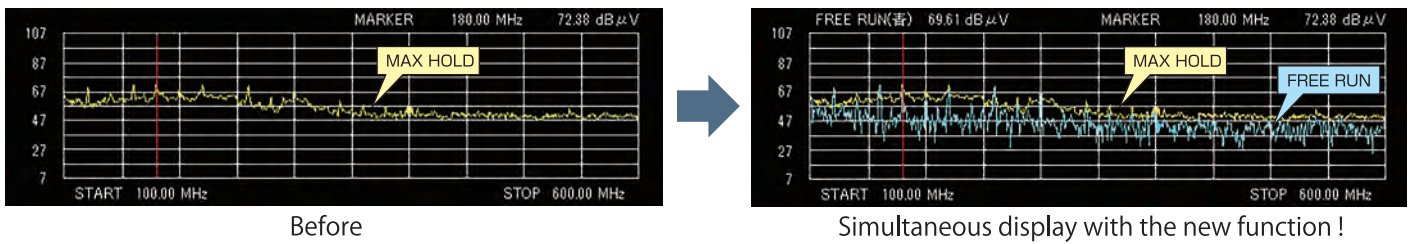

Before

Simultaneous display with the new function !

Enhanced comment functionality Check the records of countermeasures locations

NEW Function
Ver.3.2.0.0

A function has been added that allows you to display a marker at the position where you want to register a comment such as countermeasure location or notes, and to register comments on the time axis of map data and spectrograms. By registering comments for countermeasure locations in each colored marker, you can trace the countermeasure record.

Map data display

Spectrogram display

Comments registration

"Measurement files List Display" new function added Accumulated measurement files displayed to check countermeasures history

NEW Function
Ver.3.2.0.0

A function to display a list of measurement files has been added, making it possible to display a list of saved measurement files. By displaying the accumulated measurement files as a list, you can comprehensively compare the countermeasures history.


List display of measurement files (4 columns)

EMI Measure
EPS

EPS-02Ev3


Easy comparison before and after countermeasures
Equipped with a difference display function

In addition to the conventional method of comparing measured data side by side, it is now possible to compare in the same range by loading a comparison target file into the same file. Also, the data difference display function allows to compare differences in measurement data by color.

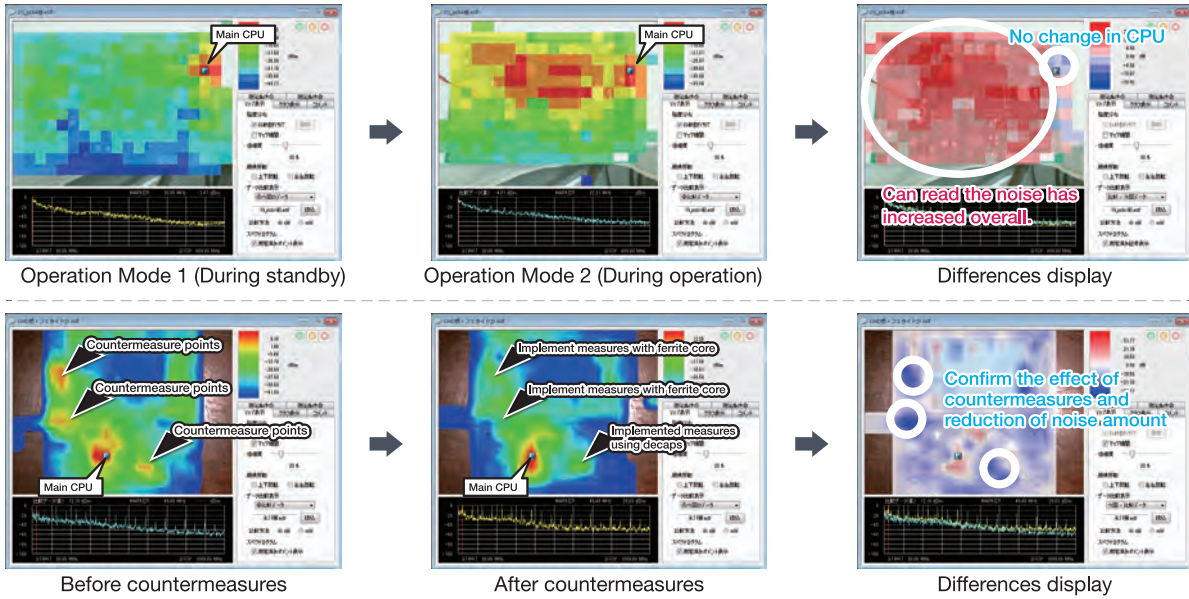


Easy measurement under the same conditions as past data

Added a new function, so that a new measurement can be performed under the same measurement conditions as the previous measurement. By loading the past measurement data, it is possible to conduct measurement under the same settings (conditions) of frequency range, RBW/VBW, etc.

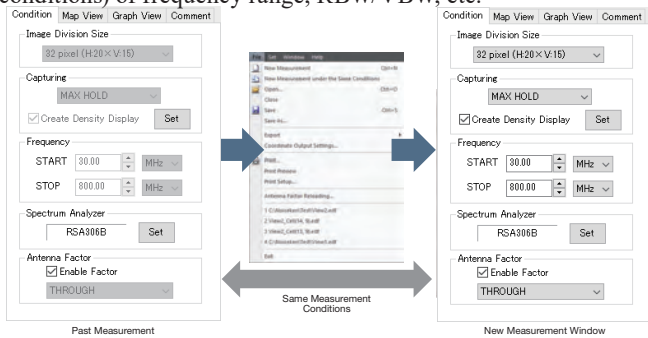


Simplified image recognition settings

By clicking on the part of the screen where you want to recognize the color (tip of the probe), the software automatically adjusts the hue, saturation, and brightness optimal for color recognition.

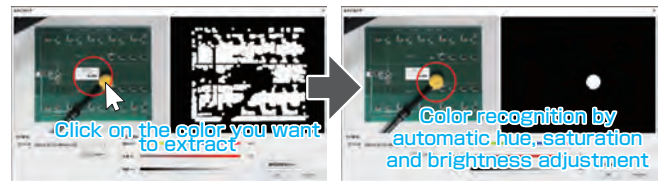

Specified coordinate output function

Measurement results can be imported to external CAD software and CAD drawings and actual measurement data can be superimposed and displayed.

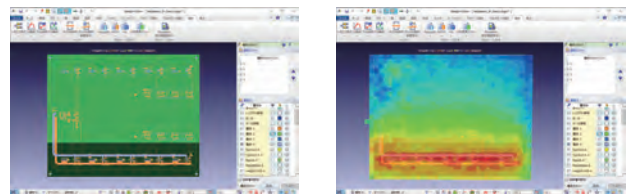


Example of actual measurement results displayed on Zuken CR-8000 Design Force

Camera image ghost function

Previously taken images can be displayed overlaid for position alignment.

Usage example 1: aligning the camera position with the previously taken image before the test

Usage example 2: realigning the camera position when it got misaligned during the test

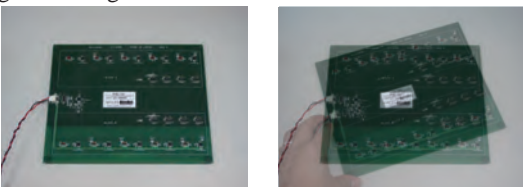

Others

Highlighting unmeasured points: unmeasured areas highlighted by flashing black and white, preventing measurement leaks.


Locates possible interference sources for pre- and post-compliance measurements

① Conducting radiated emission measurements in an anechoic chamber

Exceeded limits when measuring radiated emissions in an anechoic chamber

Failed


The frequencies at which the amplitudes are over the limit are known but far field measurement cannot identify the sources of emissions

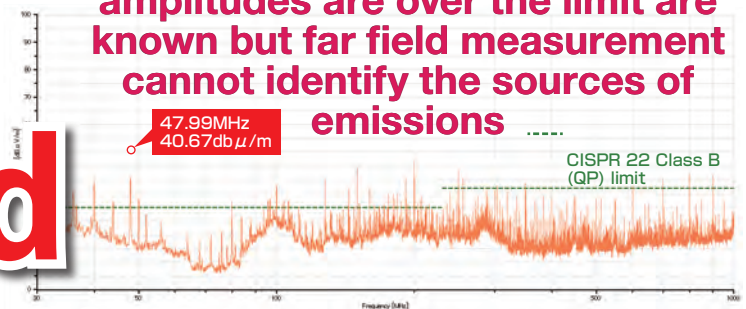

② Near-field measurement by EPS-02Ev3

A intensity distribution map shows red "hot spots", which are the countermeasures target areas. Furthermore, narrowing down to the desired range of frequencies lets you know the relevant spots of the frequencies in interest.


- Identify the "hot spots" locations for countermeasures
- Identify the root cause

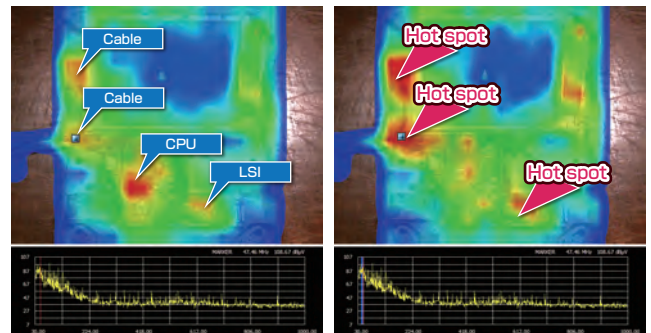

③ Incorporating suppression measures and verifying their effectiveness


Measurement after the noise countermeasures indicated that the emission level lowered. This makes it easier to establish the countermeasure strategy for problem areas such as circuit traces, components, cables and housing.

- Evaluate different countermeasures techniques
- Verify the effectiveness of the selected countermeasure technique

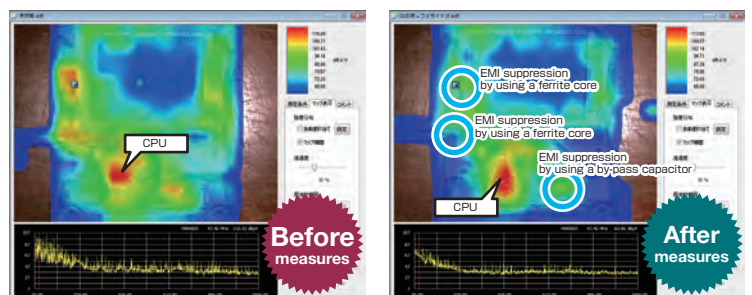

④ Re-measure radiated emissions in an anechoic chamber

After the noise countermeasures, measured the radiated emissions again in the anechoic chamber, verifying that the noise level was kept below the limit. The data can be saved as a reference for the next countermeasures, allowing the know-how to be shared and accumulated.

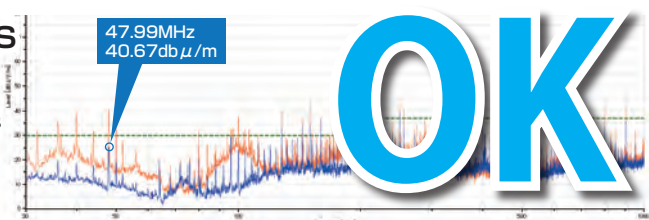

Accumulated measurement data can be the basis of optimized design and debugging method rules, and improving and sharing know-hows, which contributes to engineering time and cost reduction, and reliability and safety improvements.

EPS-02Ev3

Specifications

Frequency range	Depends on electromagnetic field probe, preamplifier and spectrum analyzer specifications
Measurement unit	dB μ V, dBm
Data recording method	Single / Free Run / Max Hold / Max Peak Data*
Auxiliary functions	Save / load / export / comment input / factor reload / camera image retake / up-down & right-left inversion of camera image / ghost display of camera image / screen enlargement-reduction
Compatible operating system	Microsoft® Windows® 10 / 11 (English or Japanese ver.)

*Max Peak Data: Displays the trace data with the largest peak value from the trace data measured at each measurement point.

System

System configuration example	Electromagnetic field probes(EM-6992)*, BNC(P)-N(P) connector coaxial cable (02-00150A), 3-color probe head covers, RF preamplifier (00-00019A), spectrum analyzer, control PC
Accessories	Web camera, camera tripod, USB extension cable for camera (2m), extension pole, LAN cable (2m), setup media (software), USB protection key, quick start guide

Electromagnetic field probes (EM-6992) *Frequency Characteristics

Model	Type	Electric / Magnetic fields	Structure
EM-6993	6cm Loop	magnetic field antenna	shielded loop
EM-6994	3cm Loop		shielded loop
EM-6995	1cm Loop		shielded loop
EM-6996	3.6cm Ball	electric field antenna	spherical dipole
EM-6997	Stub		short monopole


■ Magnetic field probes *by Electro-Metrics Corporation



■ Electric field probes



■ 100 kHz ~ 100 MHz

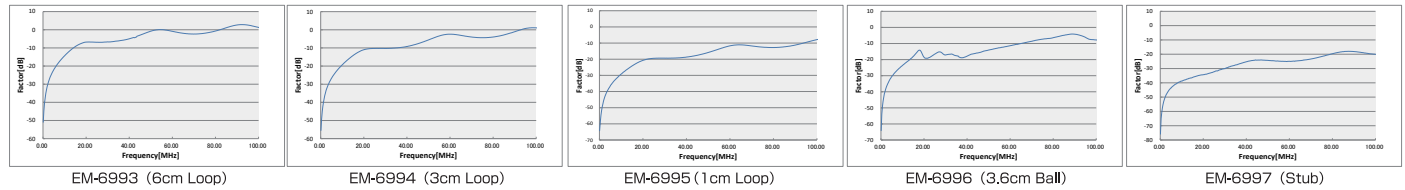

EM-6993 (6cm Loop)


EM-6994 (3cm Loop)

EM-6995 (1cm Loop)

EM-6996 (3.6cm Ball)

EM-6997 (Stub)

■ 100 kHz ~ 3 GHz

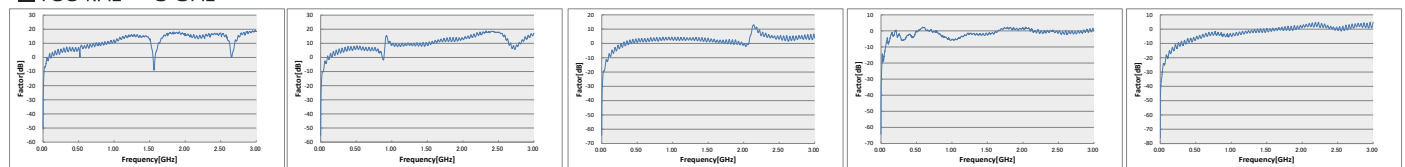

EM-6993 (6cm Loop)

EM-6994 (3cm Loop)

EM-6995 (1cm Loop)

EM-6996 (3.6cm Ball)

EM-6997 (Stub)

*The frequency characteristics of the above probes are data taken using a microstrip line.

System requirements

Parameter	EPS-02Ev3
OS	Microsoft® Windows® 10 / 11 (English or Japanese versions)
CPU	Intel Core™ i5 or higher (i7 or higher recommended)
RAM	8 GB or more recommended
HDD	min. 10 GB of free space
Display	WXGA resolution (1366 x 768) or higher required Full HD resolution (1920 x 1080) recommended

In addition to the conditions on the left, the following conditions apply.

- Operation cannot be guaranteed when using software that uses cloud services or online storage.
- A DVD drive is required to install the upgraded version and minor upgraded version.
- Make sure there is a free USB port. (Occupies 2 or 3 ports, not including mouse)

EPS-02Ev3 Options

Pre-amplifier MODELS : 00-00012A/14A/16A/19A



High-performance preamplifiers that can be used for various purposes including for the EPS-02 series.

Parameter	Specifications / Performance
Operating Frequency Range	00-00012A : 9kHz ~ 1GHz 00-00014A : 500MHz ~ 8GHz 00-00016A : 9kHz ~ 1GHz 00-00019A : 10kHz ~ 3GHz
GAIN	00-00012A : 36dB (typ) 00-00014A : 47dB (typ) 00-00016A : 46dB (typ) 00-00019A : 43dB (typ)
Input / Output Connector	N-Female
Dimensions / Weight	W160 × D230 × H88mm / approx. 3kg * protrusions excluded
Accessories	N(P)-N(P) connector coaxial cable 1 m (00-00013A only)


EPS-02Ev3 Options

Three Color Probe Head Cover MODEL : 03-00122A



A set of head covers for various probe tips. Attaching to the tip of the probe facilitates image recognition of the EPS-02 series camera. The electromagnetic field probes can be stored in the case with the probe head covers attached, and unused probe cover heads can also be stored.

Replacement Three Color Probe Head Cover MODEL:03-00123A



Replacement probe head covers for the 3-color probe head cover set.

Software upgrade MODEL : EPS-02Ev3-UG

Version upgrade to EPS-02Ev3 software. Accessories: disk media (software), USB protection key, quick start guide

EPS-02Ev3 Software minor version upgrade MODEL : EPS-02Ev3-MUG

Minor version upgrade of EPS-02Ev3 software. Accessories: disk media (software), quick start guide

EPS-02EMFv2 / EPS-02Hv2 (low frequency magnetic field) Spatial Magnetic Field Visualization System

EPS-02EMFv2 can save the frequency data of the measured magnetic field, so you can easily identify the countermeasure points.

EPS-02Hv2 can directly read and visualize the data from the magnetic field sensor measurement part. It is very compact and easy to carry, and is convenient for on-site measurement.

- The direction of the magnetic field can be determined by acquiring data on the X, Y, Z axes and the combined effective values of the three axes.
- Measurements required by ICNIRP 2010, IEC 62233 and JIS TS C 0044 can be performed.



EPS-02EMFv2



EPS-02Hv2

Specifications

Model	EPS-02EMFv2	EPS-02Hv2
Frequency Range	10Hz ~ 400kHz	10Hz ~ 400kHz、 10Hz ~ 2kHz、 2kHz ~ 400kHz
Frequency selection	available	not available
Measurement mode	magnetic field	Magnetic field (magnetic flux density) / exposure level
Measurement unit	dB μ V、 dBm	T、 G、 A/m、 %
Measured axis	X、 Y、 Z	X、 Y、 Z、 combined effective values
Data recording method	Single / Free Run / Max Hold / Peak Hold*	Peak Hold
Auxiliary functions	Save / load / export / comment input	
Compatible OS	Microsoft® Windows® 10 / 11 (English or Japanese ver.)	

*Max Peak Data: Displays the trace data with the largest peak value from the trace data measured at each measurement point.

System

Model	EPS-02EMFv2	EPS-02Hv2
System configuration	Magnetic field measuring instrument (FT3470-91/92: manufactured by Hioki Electric Co., Ltd.), oscilloscope (RTO2004-NSL or RTO6: manufactured by Rohde & Schwarz Japan Ltd.), control PC, probe extension cable 5m (dedicated cable) * FT3470-91 / 92 and RTO2004-NSL are specifically adjusted for this system, and their specifications differ from that of general products.	Magnetic field measuring instrument (FT3470-91/92): manufactured by Hioki Electric Co., Ltd.), control PC, 5m probe extension cable (dedicated cable)
Accessories	Web camera, camera tripod, USB extension cable for camera (2m), extension pole, LAN cable (2m) *EPS-02EMFv2, setup media (software)* EPS-02EMFv2 includes EPS-02Hv2, USB protection key and the quick start guide	

* Please contact us for the recommended PC system requirements.

Software upgrade MODELS : EPS-02EMFv2-UG / EPS-02Hv2-UG

Software upgrade to EPS-02EMFv2 and EPS-02Hv2. Accessories: Web camera, disk media (software), quick start guide

Introduction of LANGER's Near-Field Probes



The EPS-02Ev3 system can be used in combination with various types of electromagnetic field probes.

The electromagnetic field probes introduced below are near-field probes manufactured by LANGER, Germany, with various probes available for measurements ranging from a single pin level of parts to large components and assemblies.

We also offer probes for low frequencies and for measurements in higher frequency bands to use in combination with our EPS-02Ev3. Please contact our sales representatives for detailed specifications of various near-field probes and combination with EPS-02Ev3.

Near-Field Probes Model: LF1 set

100 kHz - 50 MHz Magnetic Field






The LF1 set is a set of 4 types of shielded near-field probes for measuring magnetic fields from 100kHz to 50MHz on electronic assemblies.

The probe heads are designed for detection of electromagnetic interference sources at single pins, larger components and on assemblies. First, identify the large-scale sources with the LF-R 400 probe, and then use high-resolution probes such as LF-B 3, LF-U 5 and LF-U 2. 5 These magnetic field probes have a structure suppressing electric field components (electrically shielded).

* A conversion connector (MODEL: 02-00050A) is required to connect these probes to EPS-02Ev3.

Near-Field Probes Model : RF1 set

30 MHz - 3 GHz Electric / Magnetic Fields






RF1 set is a set of 4 passive near-field probes for measuring electric and magnetic fields from 30 MHz to 3 GHz on electronic assemblies. Each probe is suitable for measurements very close to the electronic assembly, e.g. on single IC pins, conductive paths, components and connectors to identify electromagnetic interference sources. By using these probes one can detect the orientation of the magnetic field and the electric field distribution. These near-field probes have a structure suppressing electric field components (electrically shielded).

* A conversion connector (MODEL: 02-00050A) is required to connect these probes to EPS-02Ev3.

Near-Field Probes Model : RF2 set

30 MHz - 3 GHz Magnetic Fields





RF2 set is a set of 4 passive near-field probes for measuring magnetic fields from 30 MHz to 3 GHz on electronic assemblies. These probe heads allow for the step by step localization of the sources of interference from the RF magnetic-field on the assembly. Initially, RF-R 400-1 and RF-R 50-1 probes can be used to detect far-field electromagnetic interference. Next, the higher resolution RF-B 3-2 and RF-U 5-2 probes allow for more accurate detection of interference sources. By using these probe one can detect the orientation of the magnetic field and the electric field distribution. These near-field probes have a structure suppressing electric field components (electrically shielded).

* A conversion connector (MODEL: 02-00050A) is required to connect these probes to EPS-02Ev3.

Near-Field Probes Model : RF3 mini set

30 MHz - 3 GHz Magnetic Field






The RF3 mini set consists of two passive near-field probes with a resolution under 1 mm to measure magnetic field of 30 MHz to 3 GHz on electronic assemblies at the development stage. These probes have special miniature heads which are designed for detailed measurements of magnetic field and disturbance currents and can be used to detect the orientation and distribution of the magnetic field on the electronic assembly. These probes have a sheath structure and are electrically shielded. It is recommended to use a 20 dB or 30 dB pre-amplifier when measuring with these probes.

* A conversion connector (MODEL: 02-00050A) is required to connect these probes to EPS-02Ev3.

Introduction of LANGER's Near-Field Probes

Near-Field Probes Model : XF1 set

30 MHz - 6 GHz Electric / Magnetic Fields



The XF1 set consists of four magnetic field probes and one E-field probe for measuring E-fields and magnetic fields from 30 MHz to 6 GHz on electronic assemblies. The probe head enables step-by-step localization of magnetic field interference sources on the assembly.




First, use the XF-R 400-1 probe to detect electromagnetic interference from a distance. Second, you can use a high-resolution probe to detect interference sources more accurately.

The E-field probe is used to detect electrical interference fields near the assembly. By using these probes, it is possible to detect the orientation of the magnetic field and the electric field distribution on the electronic assembly. These near-field probes have a structure suppressing the electric field components (electrically shielded).

* A conversion connector (MODEL: 02-00137A) is required to connect these probes to EPS-02Ev3.

Near-Field Probes Model : SX1 set

1 GHz - 10 GHz Electric Field/ Magnetic Field



The SX1 set consists of three passive type near-field probes for measuring electric fields and magnetic fields with high clock frequencies of 1 GHz to 10 GHz on electronic components and ICs at development stage. The different probe heads allow measurements at distances very close to the electronic assembly. They can be used on single IC pins, conductive paths, components and connectors to identify sources of interference. By using these probes, the orientation of the magnetic field and the electric field distribution of the electronic assembly can be detected.

* A conversion connector (MODEL: 02-00137A) is required to connect these probes to EPS-02Ev3.


*LANGER near-field probes are not equipped with probe head covers.
Wrap vinyl tape around the probe tips when using to enable color recognition.
Coaxial conversion connectors (described below) are also required to connect with EPS-02Ev3.
Please contact our sales representative for more details.*

Conversion Connectors Models : 02-00050A/137A



Conversion connector for connecting LANGER near-field probes to EPS-02Ev3.

Model	Connector	Supported Models
02-00050A	N(P)-BNC(J)	LF1 set, RF1 set, RF2 set, RF3 mini set, RF4-E set
02-00137A	N(P)-SMA(J)	XF1 set, SX1 set

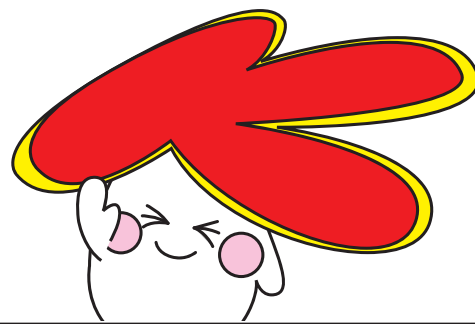

Sound source visualization system "KANON" EPS-02Sv2



EPS-02Sv2 is a system that detects the position of the sound pressure sensor from the image of the camera by color recognition and analyzes the frequency of the signal measured by the sensor in real time. The intensity level of the measured sound pressure can be superimposed on the actual image of the object to be measured and displayed in color on a computer monitor in the form of a heat map. Measurements for sound countermeasures are usually performed using sound source detection equipment in a soundproof facility, but the facility and the equipment itself are very expensive.

In addition, since most sound source detectors pick up various sounds over a wide range, it is difficult to use and measure them on-site in the field.

The Sound Source Visualization System "KANON" makes it possible to easily measure the sound which is usually done in a soundproof facility on-site, by using an omnidirectional microphone with a structure giving it directivity.

Allows to easily identify the sound source and take countermeasures on site before the final check at a soundproof facility. Contributes to soundproofing cost and man-hours reduction by reducing the frequency of using of the soundproof facilities and equipment.

- Improved microphone directivity allows for easy sound measurement even in non-soundproof sites.
- Measurement is conducted by simply tracing the space with the sensor, so anyone can easily operate it.
- The intensity level of the measured sound can be superimposed on the actual image of the object to be measured and displayed in color on a heat map on a computer monitor.
- Easily identify the sound source by visualizing the measurement results.
- Recognition settings can be made according to the color of the sensor, enabling image tracking supporting a variety of colors.
- Simple noise measurement is available.

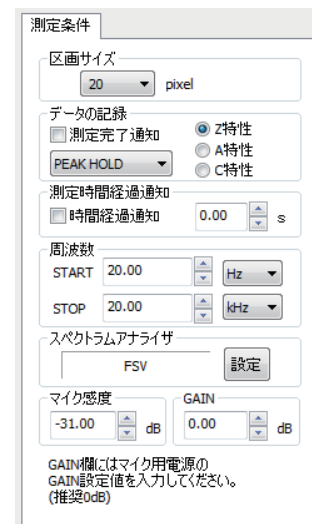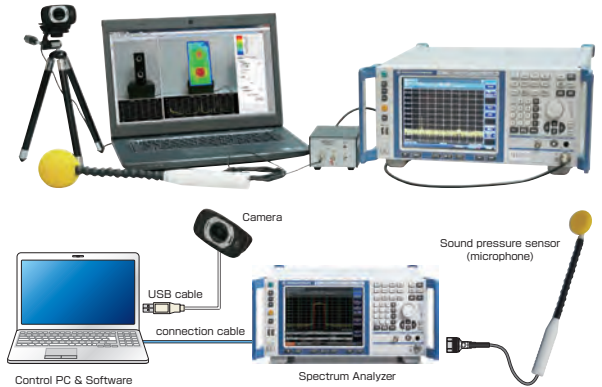

EPS-02Sv2 Specific Functions; Software Specifications

EPS-02Sv2 can perform simple noise measurement by digital frequency weighting (Z/A/C) of the measured sound pressure level.

Frequency weighting sound pressure level display	Z-weighting	Flat frequency weighting
	A-weighting	Frequency weighting that approximates the audibility of small sounds
	C-weighting	Frequency weighting that approximates the audibility of loud sounds
Color coding of map diagrams by overall level (also possible to color-code the map diagram by peak level)	Overall level	Sound pressure levels composite value
	Microphone sensitivity input function	Microphone sensitivity
GAIN input function	GAIN	Microphone power supply amplification (GAIN) setting value

Specifications

Model	EPS-02Sv2
Frequency Range	20Hz ~ 20kHz
Frequency Selection	available
Measurement Mode	sound pressure level
Measurement Unit	dB
Measurement Axes	N/A
Sensor	1/2 inch microphone
Microphone cable	BNC coaxial cable
Data recording method	Single / Free Run / Max Hold / Peak Hold
Auxiliary functions	Save / Load / Print / Export / Comments Input
Supported OS	Windows 10 / 11
Accessories	USB camera, USB extension cable for camera (2m), tripod for camera, Software, USB protection key, quick start guide, microphone head covers (yellow, red, blue - 1pc each color), microphone arm, microphone + preamp, microphone power supply, AC adapter, BNC-P ⇄ BNC-P 50 Ω coaxial cable (3m), BNC-P ⇄ N-P 50 Ω coaxial cable (1.5m), LAN cable.

Options

Microphone head covers (yellow, red, blue) MODEL : 03-00100A



Probe tip head covers set.
Makes EPS-02Sv2 camera image recognition easier by attaching to the probe tip.
*Yellow, red, blue - 1pc each color.

Microphone check kit MODEL : 19-00147A




Check kit outputting 1kHz 94dB sound for diagnosing microphone malfunctions.

Broadband Sleeve Antenna

NKU07M32G/NKU2460G

Broadband sleeve antenna has been developed for efficient immunity testing against hand-held transmitters and cellular phones. In the conventional strong electromagnetic field immunity test in the near field, it was necessary to replace the antenna according to each frequency, which required a lot of labor and time. This new Broadband sleeve antenna is a single antenna solution eliminating the need for antenna changes and dramatically reducing the test time. Furthermore, this antenna with its small-size and lightweight properties and a flexible handle is suitable for testing in narrow spaces.


- Compliant to ISO11452-9 Ed.2 (2nd) standard
- A wide frequency range eliminating the need for antenna changes
- 20 W maximum power input allows for strong electromagnetic field testing
- High efficiency due to a low VSWR and high gain
- Suitable for broadband digital modulation thanks to a good VSWR flatness
- Small, light-weight and flat antenna easy to use in narrow spaces
- Since there is little variation in the near-field electric field distribution for each frequency, it is possible to radiate the electromagnetic field to the EUT without changing the position of the antenna.
- A wide radiation pattern makes directivity of the fields no longer an issue

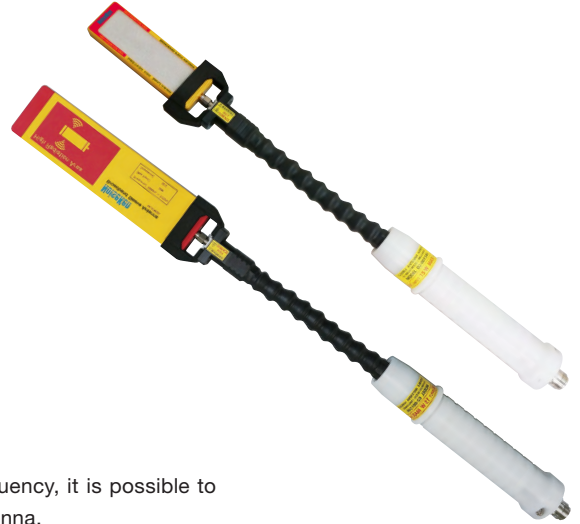


Specifications

Parameter	NKU07M32G specifications	NKU2460G specifications
Frequency range	(660) 700 MHz ~ 3.2 GHz	2.4 GHz ~ 6 GHz
VSWR	≤ 2	
Maximum power input	20 W (continuous) 30 W (continuous up to 10 minutes)	10 W (CW)
Input impedance	50 Ω	
Connector	SMA (J) *antenna part only	
Dimensions	W50mm × D8mm × H186 mm (protrusions excluded)	W35mm × D10mm × H108 mm (protrusions excluded)
Weight	73.5g	20 g

VSWR

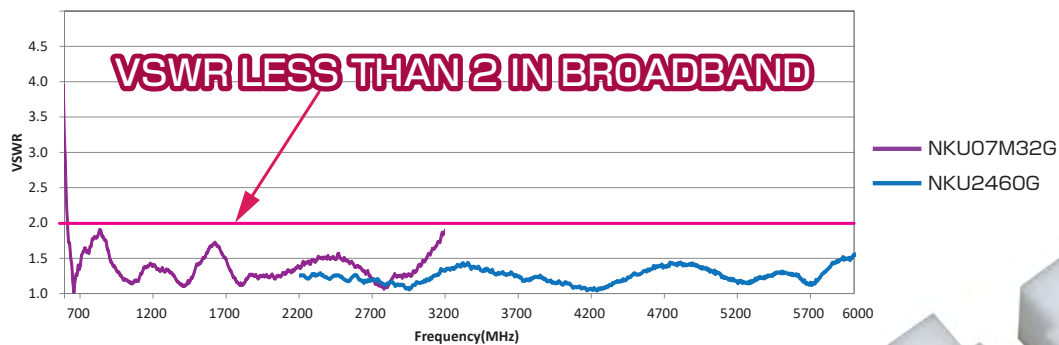

Antenna and Dedicated Flexible Antenna Handle

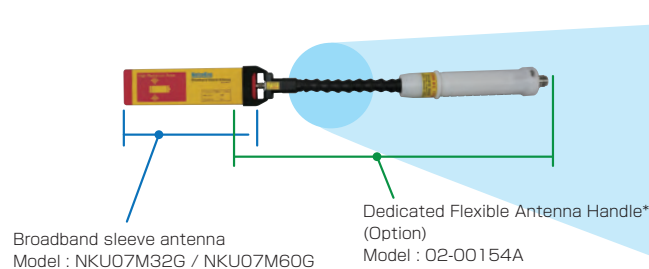

It can be bent freely

Antenna Spacer MODEL : 03-00113A/114A

Antenna Spacer for the Broadband Sleeve Antenna. Equipping it allows the irradiation distance from the EUT to be kept at 50 mm.




Image of the equipped Antenna Spacer

*02-00154A is a dedicated flexible antenna handle for the NKU series, enables stable measuring reproducibility by incorporating sheath current choke technology to suppress unwanted surface waves.

NKU07M32G / NKU2460G

Specifications


■ Near field distribution characteristics (NKU07M32G)

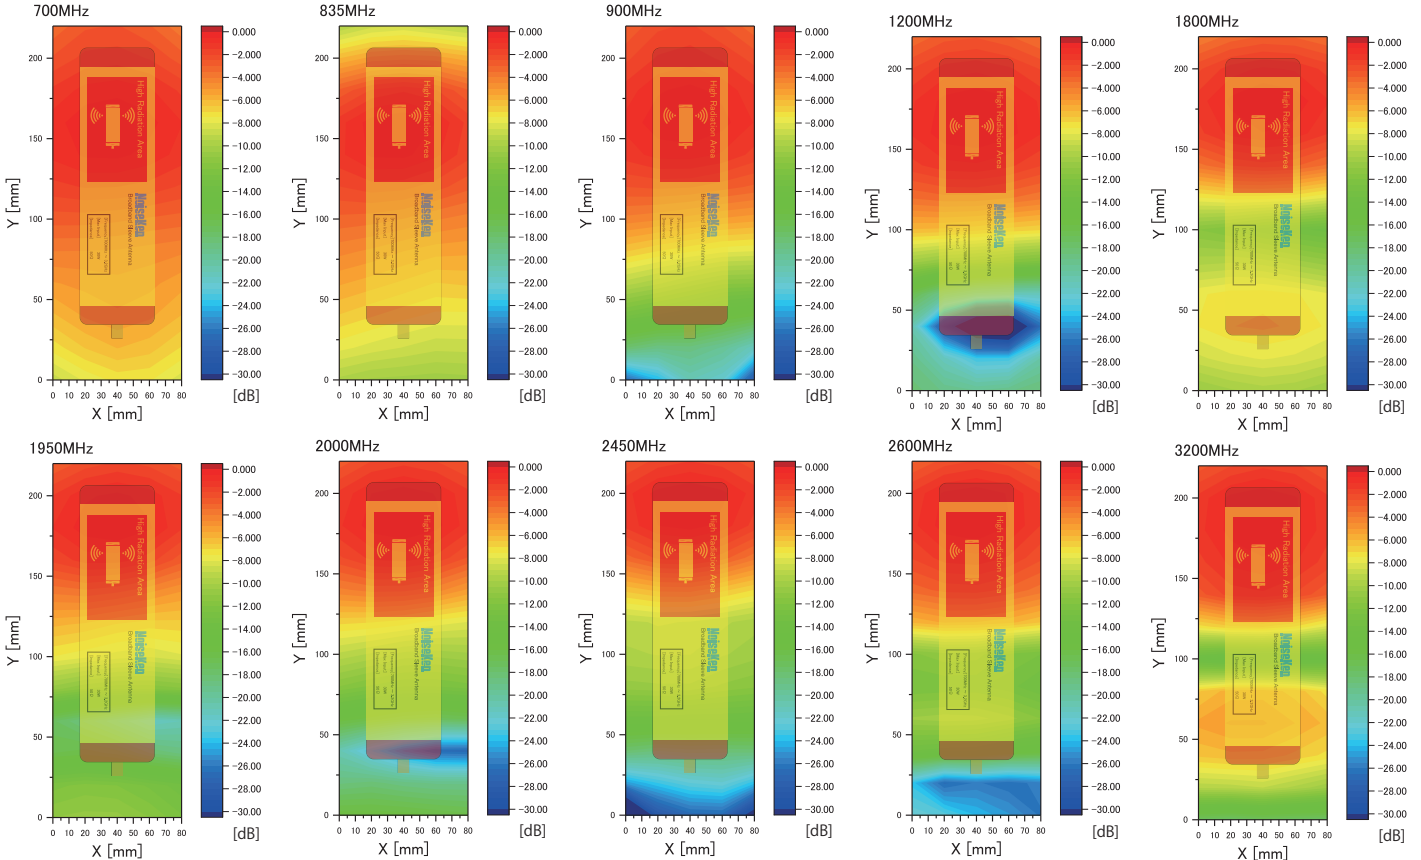

Electric field direction : y-axis (Single axis)

distance : 50mm


■ Near field distribution characteristics (NKU2460G)

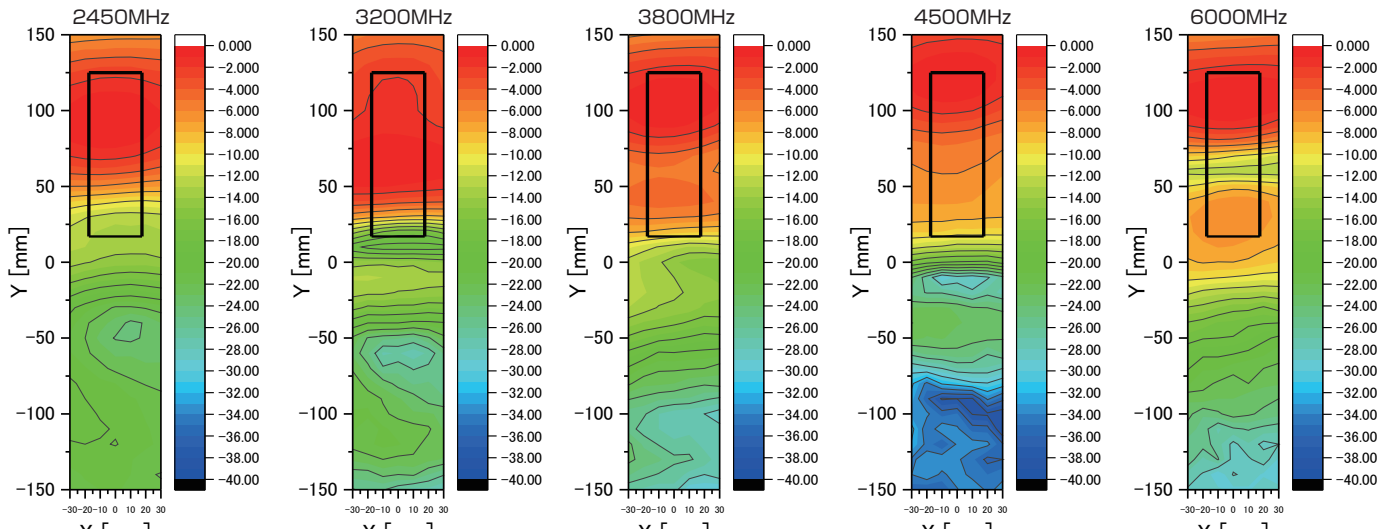

RF Immunity Test System

NKU07M32G / NKU2460G

System configuration example

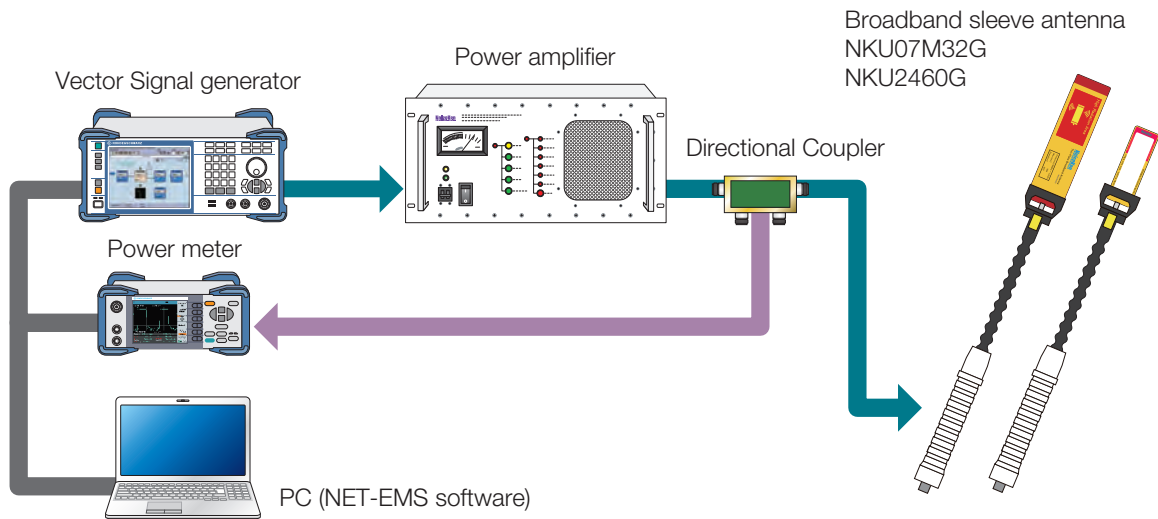


Testing Image

In-vehicle testing



Testing for automotive electronics

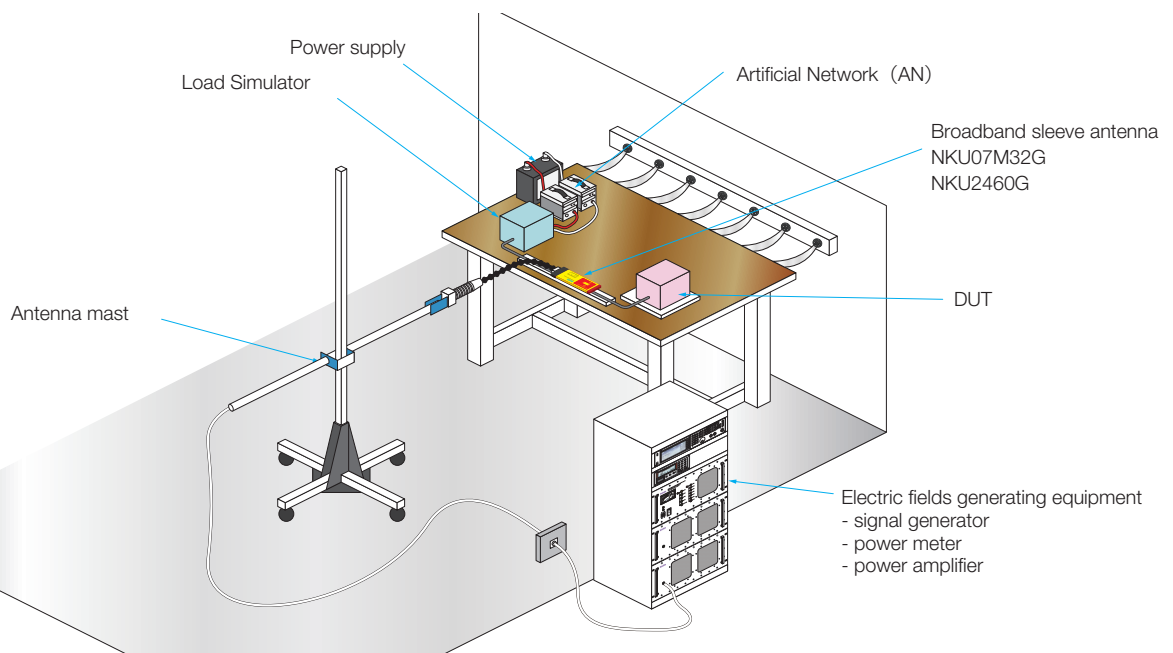

RF Immunity Test System

NKU07M32G / NKU2460G

CALIBRATION SERVICE AVAILABLE

Calibration services are available for VSWR, electric field distribution and proximity gain characteristics of the Broadband Sleeve Antenna (NKU07M32G, NKU2460G). In ISO 11452-9 standard the calibration of electric field is not specified, and testing level is set in accordance with input power to the transmitting antenna.

The calibration allows to confirm proper functions of the transmitting antenna, which is necessary to ensure the quality of the testing. In addition, the electric field distribution and proximity gain characteristics allow to confirm the position and strength of strong radiation from the Antenna.





NKU07M32G



NKU2460G


Electric field distribution characteristics image

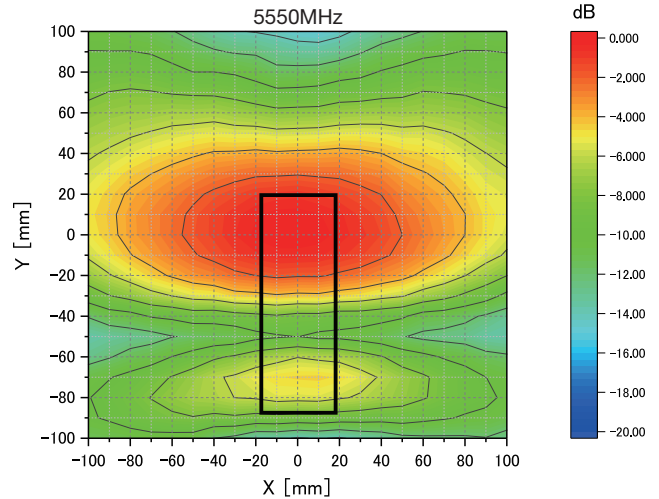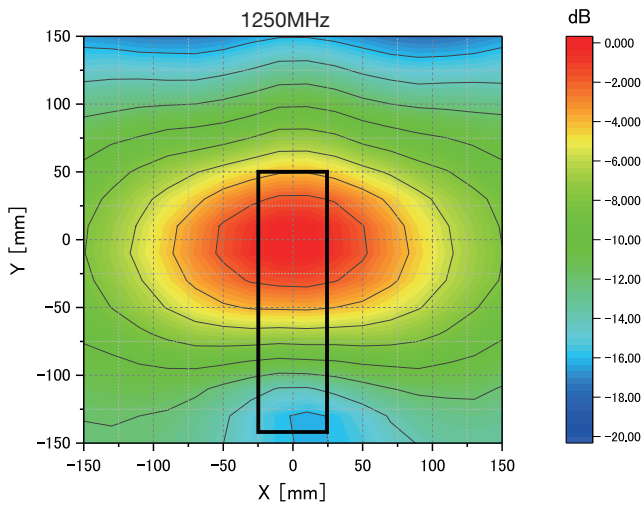


[Distribution map conditions]

- 1-axis electric field ● Measurement distance: 50 mm from the antenna
- Contour line interval : 2dB / Line

VSWR characteristics image

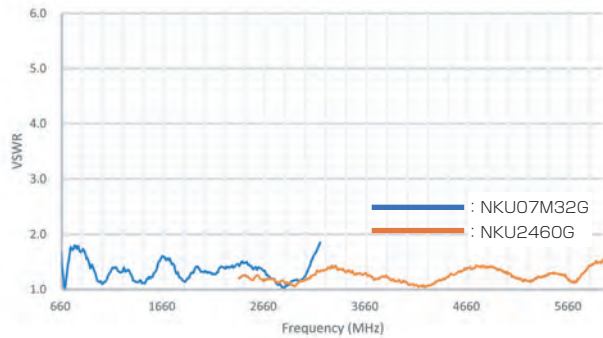

Proximity gain characteristics image

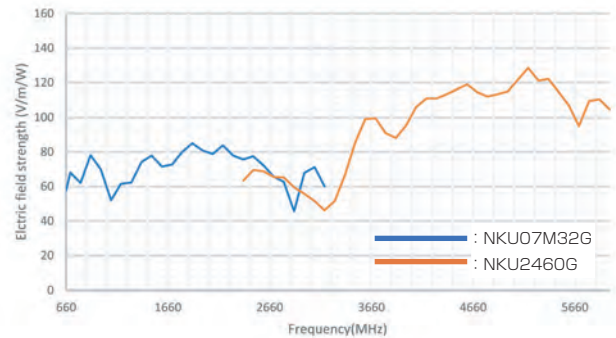

[Proximity gain conditions]

- 1-axis electric field ● Measurement distance: 50 mm from the antenna
- Measurement position coordinates (X : Y): NKU07M32G (0 : 10), NKU2460G (0 : 0) ● Antenna input: 1W

TEM Horn Antenna

THA-380M60G / THA-380M70G

EMC Testing in the 5G/IoT Era!

The TEM horn antenna is an antenna for conducting a close proximity radiation immunity evaluation test (near electromagnetic field immunity test) of electromagnetic waves radiated from various wireless transmitters such as mobile phones and Wi-Fi equipment.

In the future, the close proximity radiation immunity evaluation test using the TEM horn antenna is expected to expand to various product standards such as medical equipment (IEC 60601-1-2) and multimedia equipment (CISPR 35).

NoiseKen's TEM horn antenna has a wide band, low VSWR, and wide electric field uniformity, offering an ideal solution for an efficient close proximity radiation immunity test.



THA-380M60G

THA-380M70G

* prototype image


* This product is based on research results of the National Institute of Information and Communications Technology (NICT), Japan and joint-research with Noise Laboratory Co., Ltd.

- TEM horn antenna compliant with IEC 61000-4-39 Ed.1 standard.
- Allows testing to the entire frequency range of 380 MHz - 6 GHz with one antenna.
- Also supports 6 GHz band Wi-Fi "Wi-Fi 6E" (5.925 - 7.125 GHz).
- Low VSWR and high GAIN enable efficient electromagnetic wave radiation.
- Wide field uniformity reduces the number of times of movement of the antenna when radiating the EUT.
- Can be used for IEC 61000-4-3 preliminary testing in combination with a low-cost/low-output power amplifier by utilizing the proximity characteristics of the antenna.

Specifications

	THA-380M60G	THA-380M70G
Parameter	Specifications	
Compliant standard	IEC 61000-4-39	
Frequency range	380 MHz - 6 GHz (8 GHz) * over 6 GHz not guaranteed	380 MHz - 7.125 GHz
VSWR	below 3 (refer to Figure "VSWR")	below 3 (refer to Figure "VSWR") * over 6 GHz not guaranteed
Input power	380 MHz - 750 MHz : 180 W MAX 750 MHz - 1.7 GHz : 100 W MAX 1.7 GHz - 6 GHz : 65 W MAX	380 MHz - 7.125 GHz : 100 W MAX
Electric field uniform area	refer to figure "Electric field distribution characteristics"	
Required power	refer to figure "Power required for generating 300 V/m (typ) (at 0.1 m)"	
Impedance (typ)	50 Ω	
Connector	N (J)	
Dimensions	W450 mm × H420 mm × D598 mm *excluding protrusions, excluding φ 22 antenna support pole *refer to the below figure "Dimensions" for the details	W225 mm × H324 mm × D309.5 mm *excluding protrusions, excluding φ 22 antenna support pole *refer to the below figure "Dimensions" for the details
Weight	approx.3.2 kg	approx.1.6 kg

Dimensions


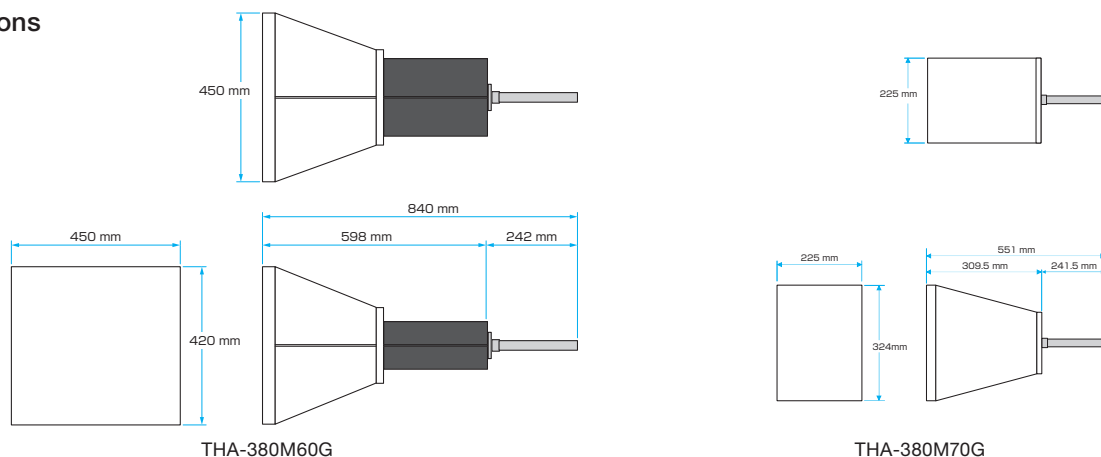


THA-380M60G



THA-380M70G

THA-380M60G / THA-380M70G





■ VSWR

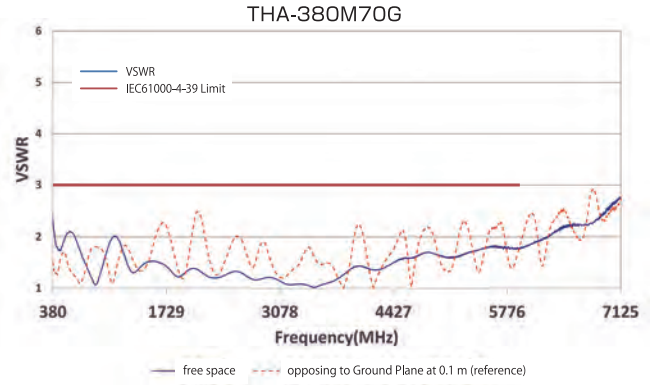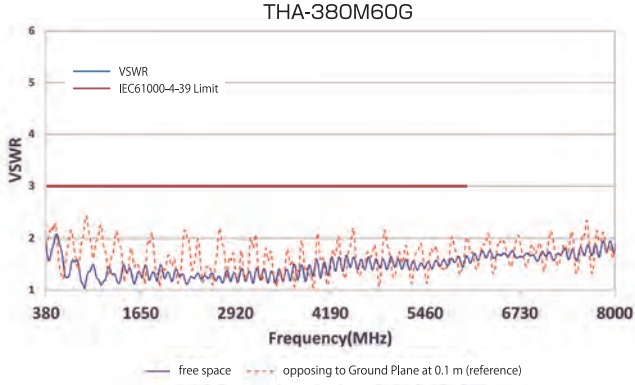


■ Power required for generating 300 V/m (typ) (at 0.1 m)

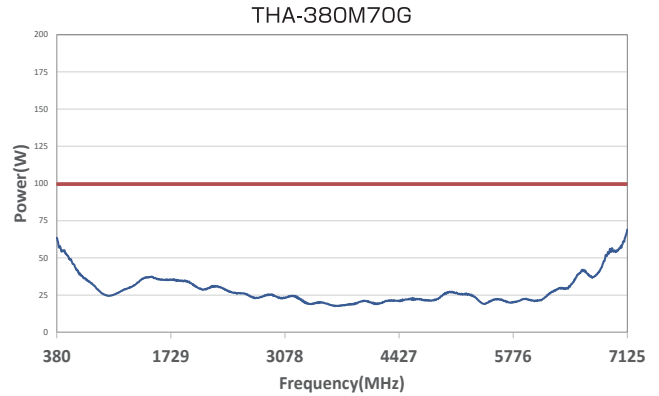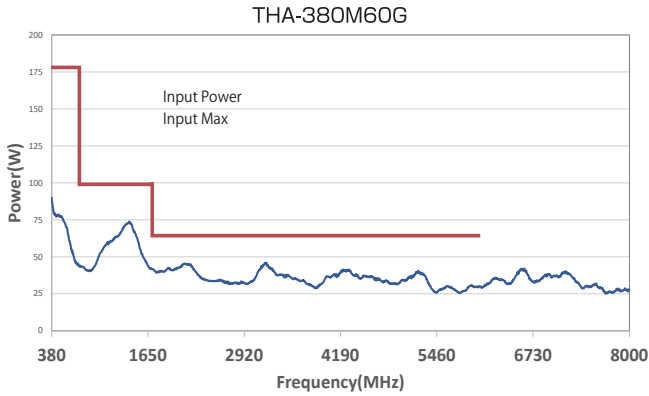

■ Electric field distribution characteristics

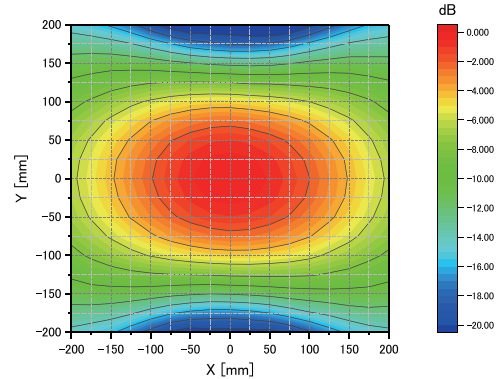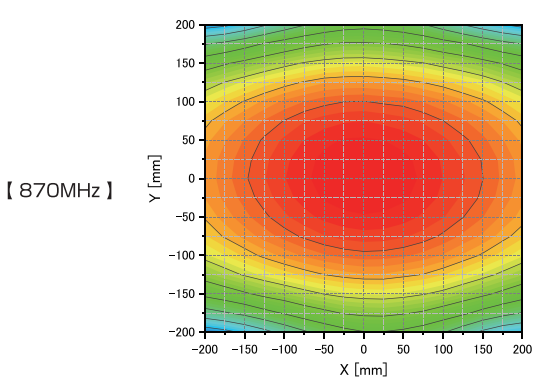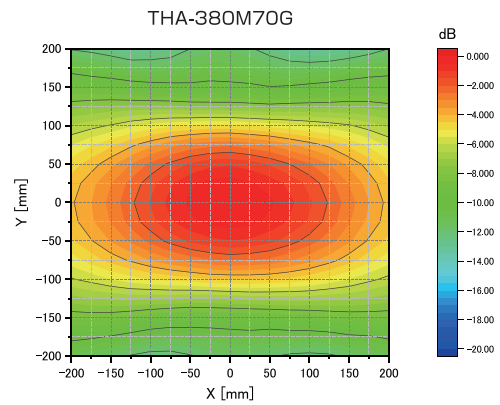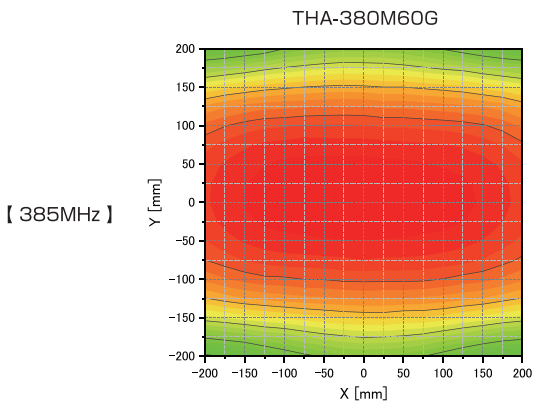

THA-380M60G / THA-380M70G

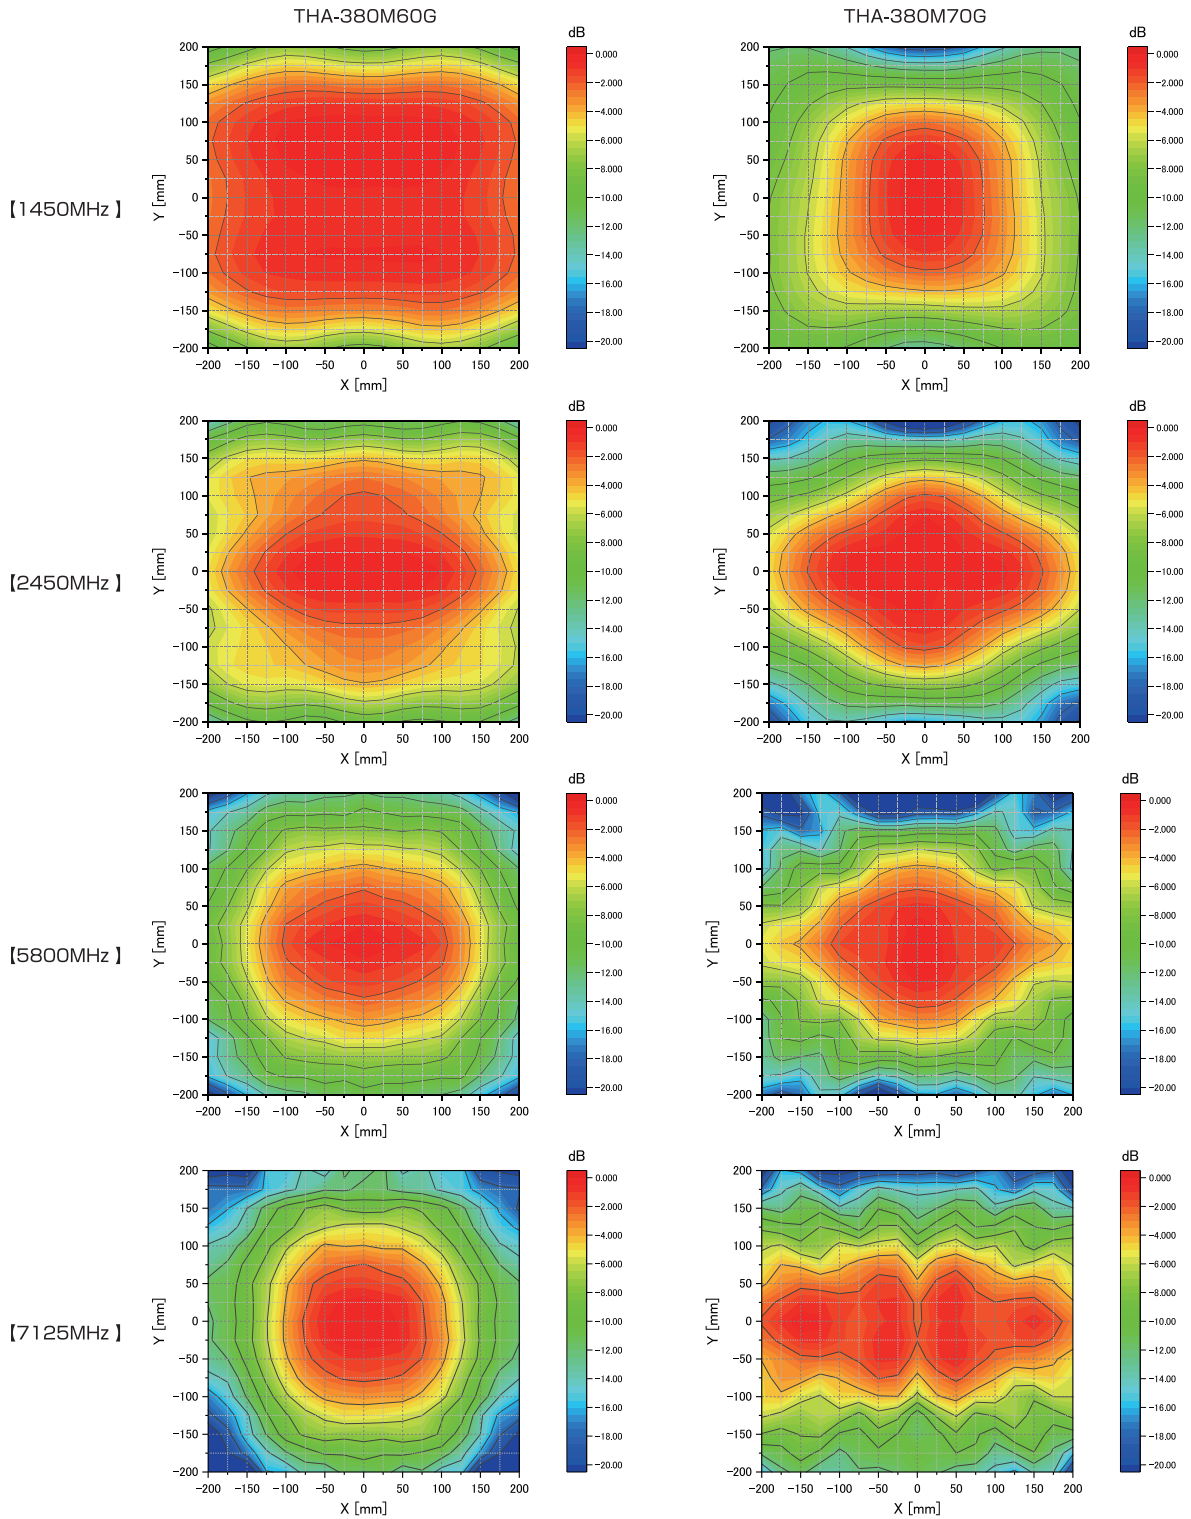

Antenna distance: 0.1 m



2 dB / Line: The second contour line from the inside is the electric field uniform area.

The electric field distribution is vertically and horizontally symmetrical







THA-380M60G / THA-380M70G

Close proximity distance characteristics

Distance attenuation characteristics * Distance attenuation characteristics on axes with 100 mm from the antenna as the reference point

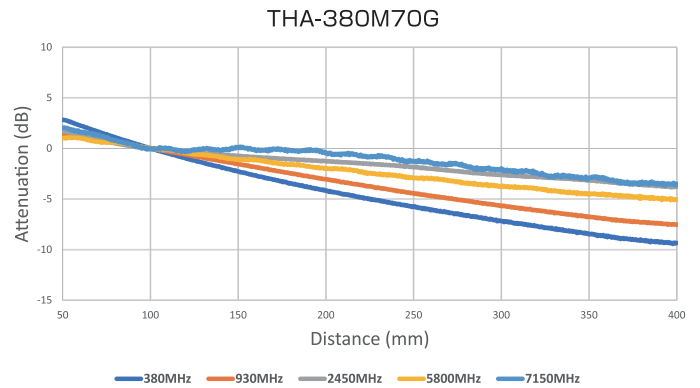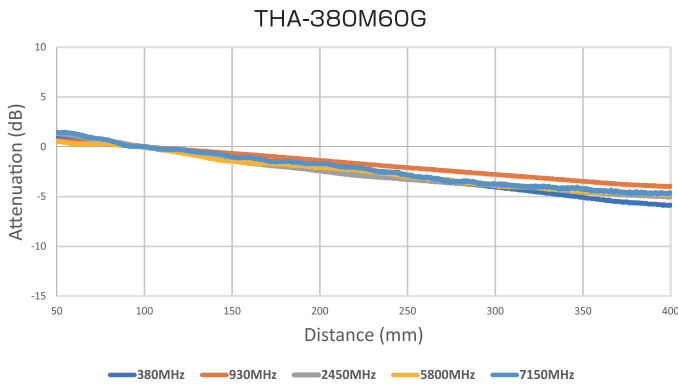


Electric field distribution distance characteristics * Reference point: maximum of 100mm

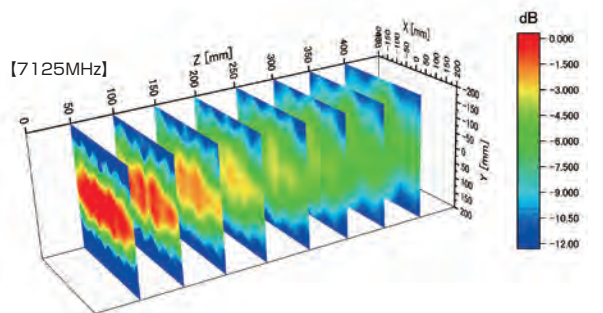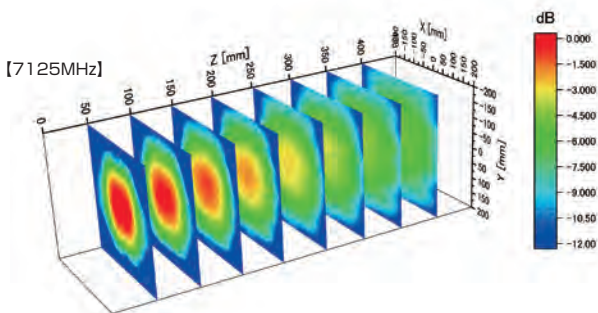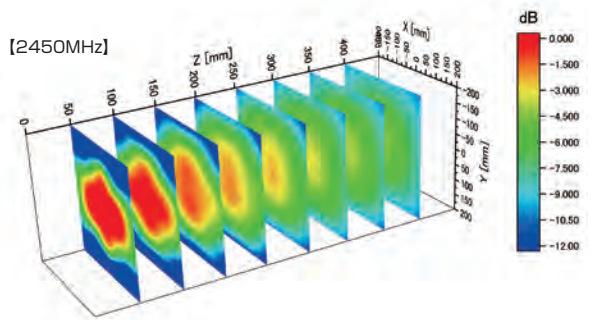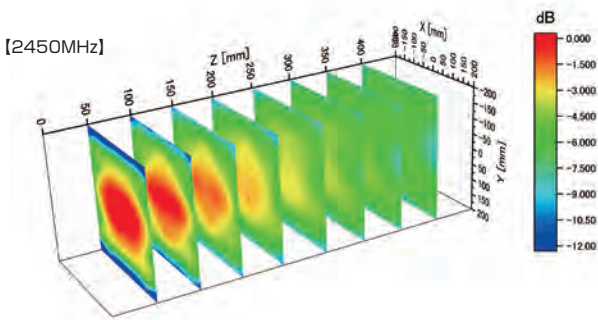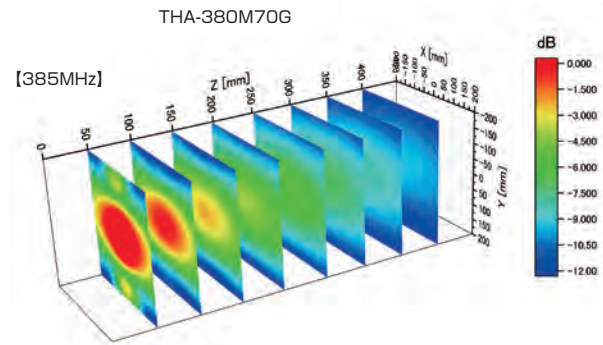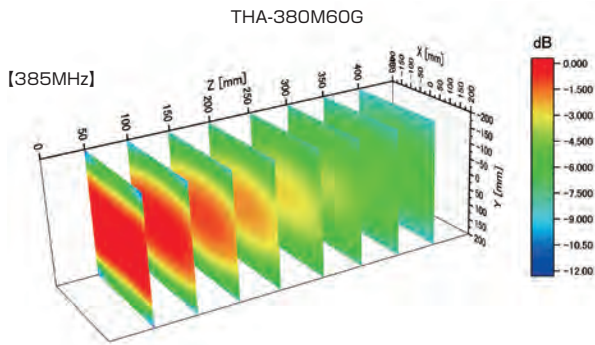

THA-380M60G / THA-380M70G


Securing Uniform Field Area

In the actual test, a quadrangle inscribed in the uniform electric field area is created to control the irradiation position. Therefore, a symmetrical electric field distribution characteristic that can create a large square with the maximum point in the center is required.




[Symmetrical Uniform Field Area]

Since the uniform electric field area is symmetrical vertically and horizontally, a wide uniform electric field area can be obtained with reference to the central axis of the antenna.



[Distorted Uniform Field Area]

If the uniform electric field area is distorted, it is difficult to secure a wide uniform field area with reference to the central axis of the antenna (the uniform field area becomes narrow).

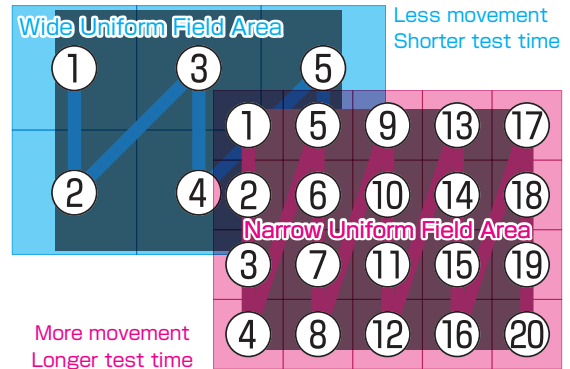


Difference in the number of antenna movements

The wide and symmetrical electric field distribution characteristics contribute to shorter test time!

THA-380M60G and THA-380M70G Comparison Table

	THA-380M60G	THA-380M70G
Dimensions, Weight	Good	Excellent
Frequency range	Excellent	Excellent
	8 GHz max (*guaranteed up to 6 GHz)	7.125 GHz max
VSWR	Excellent	Excellent
	Good VSWR even when facing metallic surfaces	
Required Power (for generating 300 V/m (typ) (at 0.1 m))	Good	Excellent
Electric field distribution	Excellent	Good
	Excellent	Good
Distance attenuation characteristics	Attenuation after the reference point is low, being effective even for products with depth.	Relatively large difference in attenuation characteristics depending on the frequency.
Electric field distribution distance characteristics	Excellent	Good
Use in far-field test methods	Excellent	N/A Specifically designed as an antenna for close proximity radiation immunity testing

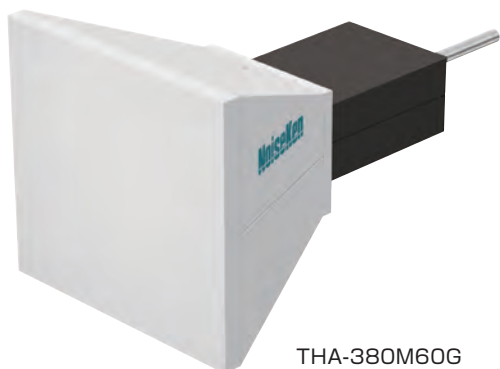

RF Immunity Test System


THA-380M60G / THA-380M70G

System configuration image

The system consists of a signal generator serving as a signal source for noise, a power amplifier that amplifies the signal, a TEM horn antenna that emits radio waves, a power meter to check the power supplied to the TEM horn antenna and a software to control these devices.

The basic system configuration is almost the same with the IEC 61000-4-3 radiated immunity test. System setup for the proximity irradiation test can be achieved by simply switching the antennas from the broadband antenna to the TEM horn antenna.


*antenna position control (X-Y control) is available as an option

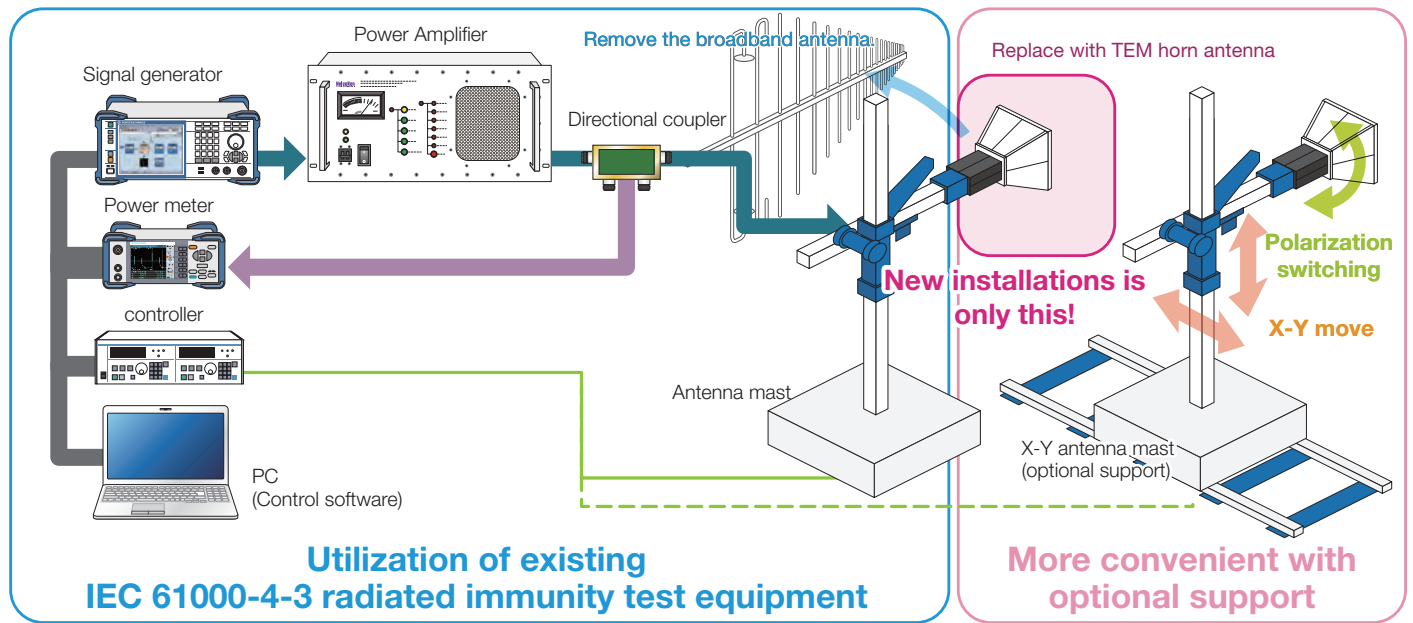

System configuration using the dedicated software

Test image using dedicated software (X-Y position movement and polarization switching)



In the test, the distance between the DUT and the antenna is set to 100 mm, and all surfaces of the DUT are radiated with vertically polarized waves and horizontally polarized waves. By using the dedicated software to automate the antenna movement and radio wave radiation, you can further reduce test time and labor.

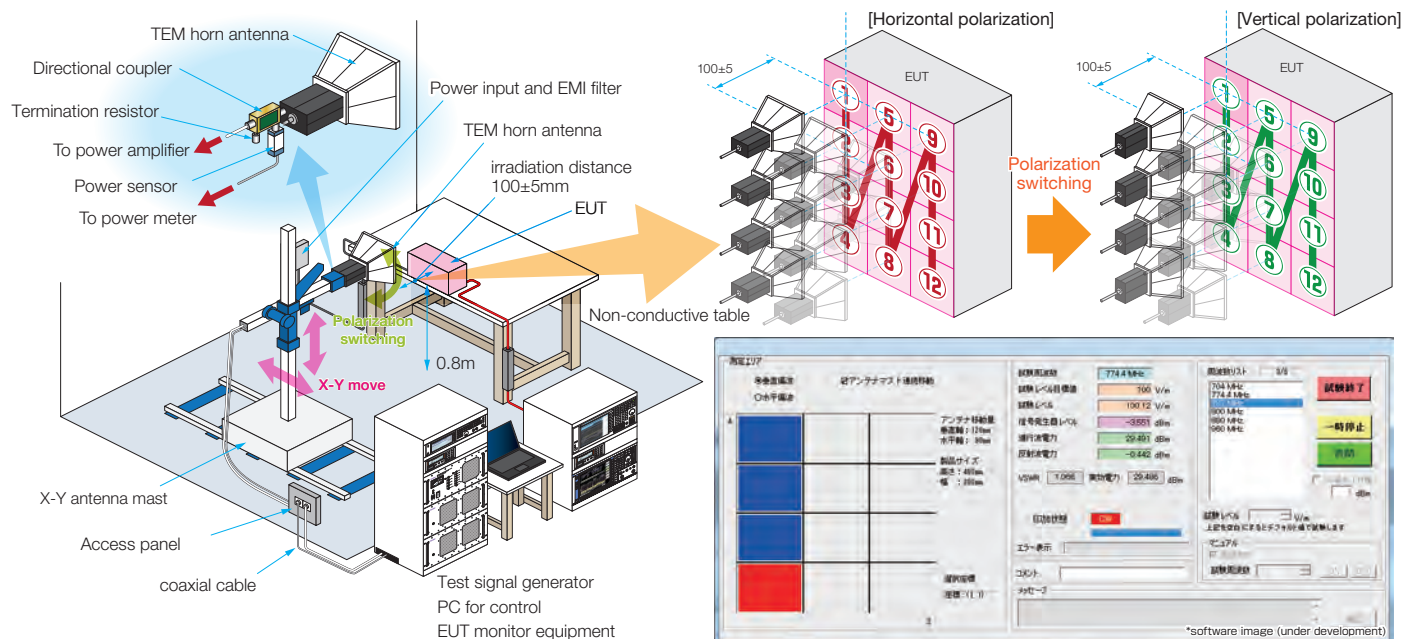



THA-380M60G / THA-380M70G

The need for the close proximity radiation immunity testing

With the advent of new communication technologies and infrastructures such as IoT and 5G, in addition to smartphones and wireless LANs, which have become extremely popular in recent years, a world is emerging in which many electronic devices are connected by wireless communication. On the other hand, from the perspective of EMC, the number of cases where these wireless transmitters are in close proximity to other electronic devices is increasing, raising concerns about the risk of electromagnetic interference. Against this background, IEC 61000-4-39, an electromagnetic immunity test method for nearby transmitters, was issued. Since the electromagnetic field generated by a nearby transmitter is extremely strong and has the characteristics of the near field, it is necessary to perform it in addition to the conventional radiated immunity test that radiates from a distance. The basic standard IEC 61000-4-39 defines the antenna to be used, and it is necessary to use a TEM horn antenna in the frequency band of smartphones, mobile phones, and 5G (sub6).

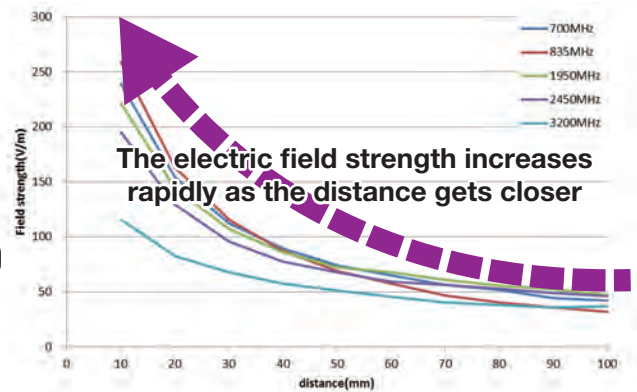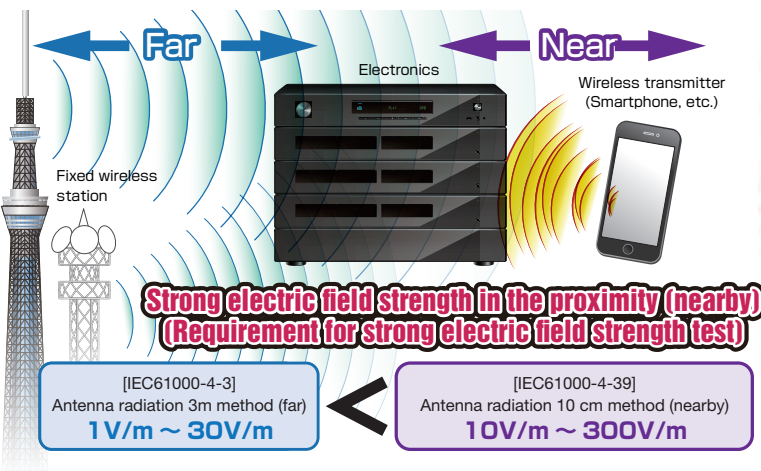

Electric field near the transmitter-Image of distance characteristics

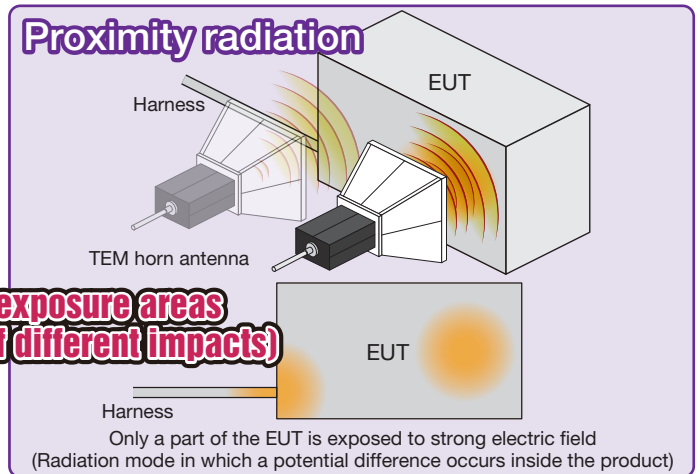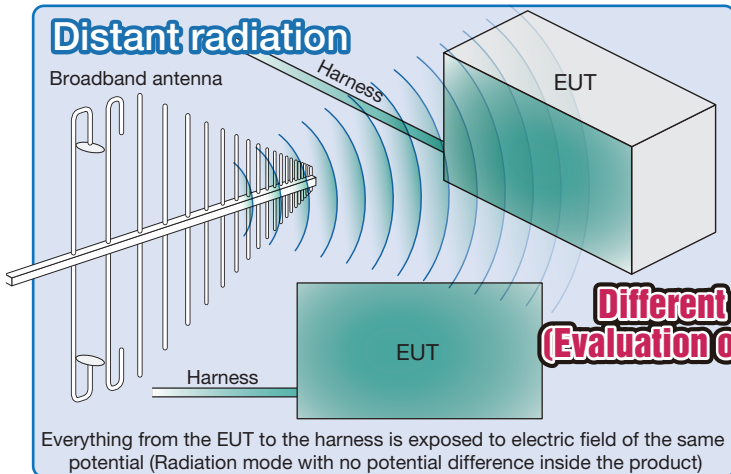

Test conditions
Product: Automotive navigation system
Modulation: PM
Frequency: 900 MHz
Evaluation: 1 kHz audio signal

[Note]
This test is the result of the test conducted in accordance with the proximity radiation immunity test standard (ISO 11452-9) for automobile equipment.
Both distant and close proximity radiation testing are already being conducted for vehicles and in-vehicle equipment.




Different test conditions show different test results


RF Immunity Test System

Simplified Radiated Immunity Test System

Low Cost Easy

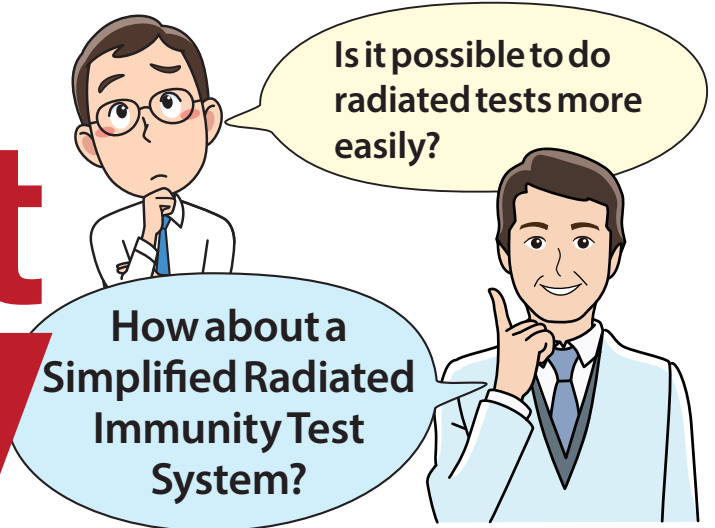


We build the system with the minimum necessary equipment.

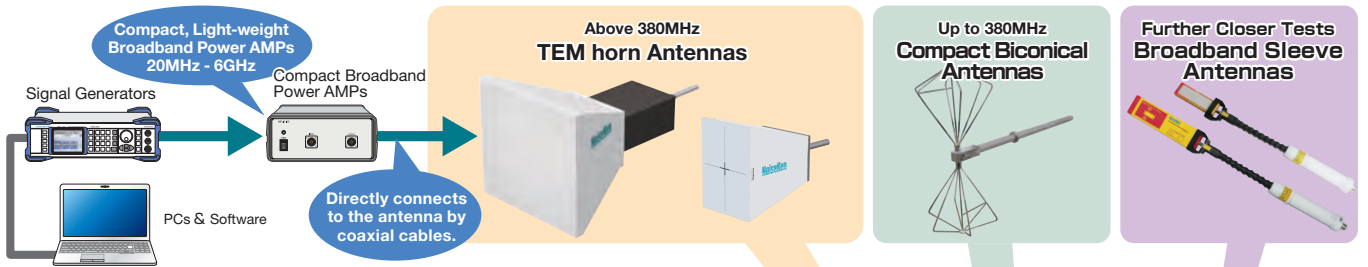

Simply select the test distance and set the test level.

Test distance : 100mm / 200mm / 300mm / 400mm
 Field strength : 10V/m etc.
 SG automatically adjusts required antenna input power.

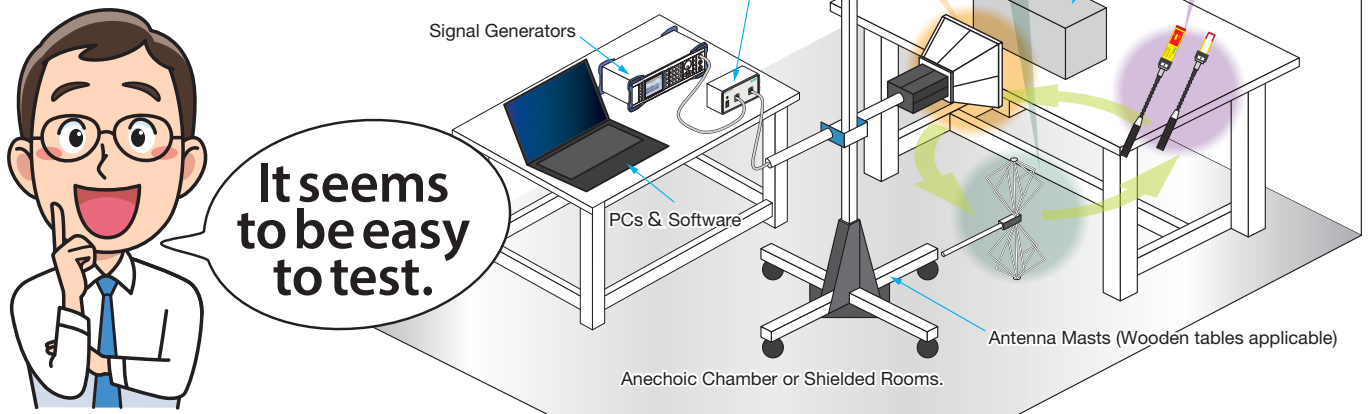

RF Immunity Test System

Simplified Radiated Immunity System

High-performance Proximity Antennas

Select Antennas According to the Test Purpose

Pre-test of IEC 61000-4-3

TEM horn Antennas
THA-380M60G / THA-380M70G
380MHz ~ 6GHz(8GHz) / 380MHz ~ 7.125GHz

Compact Biconical Antennas
BBVU 9135 + UBAA 9114
80MHz ~ 380MHz

Application examples
Frequency ranges : 80MHz~6GHz
Field strength : 18V/m
Modulation : AM 1kHz 80%*
Distance : 200mm
Test locations : Anechoic chamber or Shielded room
*Constant peak

Verify Electromagnetic Interference from other RF Transmitters.

Broadband Sleeve Antennas
NKU07M32G / NKU2460G
(670)700MHz ~ 3.2GHz / 2.4GHz ~ 6GHz

Application examples
Reference standard : ISO11452-9
Frequency range : 670MHz~6GHz
Power : min. 1W
Modulation : CW/AM*/PULSE
Distance : 50mm
Test location : Anechoic chamber or Shielded room
*Constant peak

Even though it is simple, the test is applicable at low-cost.

We have been carried out the conducted immunity (IEC 61000-4-6) test in a shielded room, I am very satisfied with the system because it is simple, low-cost, and easy to perform a radiated immunity test.

- Industrial equipment maker -

An effective test system to reproduce failure.

Failure occurred in the radiated immunity test at the EMC test lab, and I had a hard time to locate the problem. Failure was reproduced when the test was carried out with the simple radiated immunity test system. It is very effective in locating the defective location by bringing the antenna closer.

- Multi-media equipment maker -

Used for evaluation of wireless transmitter bands.

Radiated immunity test (IEC 61000-4-3) only requires up to 1 GHz, it is nice that not only applicable to perform simple evaluations up to 1 GHz, but also applicable to perform simple evaluations of wireless transmitter bands such as the 2 GHz band and the 5 GHz band.

- Industrial equipment maker -

Voice of the Customer



Low-cost, but sufficient test system.

Since we are not in such trouble enough regarding the radiated immunity system (IEC 61000-4-3) to make a new capital investment, a simple test system at such a low price is sufficient.

- FA equipment maker -

Measures against electromagnetic interference from wireless transmitters.

There are increasing cases of electromagnetic interference from other wireless transmitters such as Wi-Fi and smartphones, it is nice to be able to test as a countermeasure against electromagnetic interference from wireless transmitters.

- Semiconductor device maker -

Reproduce communication loss due to electromagnetic interference.

Communication loss occurs due to electromagnetic interference from other wireless transmitters in products with communication functions. I want to use it for reproduction.

- Communication equipment maker -

ISO Standard Compliant Automotive Transient Surge Simulator

ISS-7600 Series

This tester simulates various transient surge phenomenon noise in vehicles required by the international standard ISO 7637-2 (2011 version) and evaluates the resistance of on-board electronic devices.

- Highly accurate output waveforms
- Waveforms guaranteed not only at the output terminal of each generator but also at the output terminal of the Coupling Network.
- Capable of running either as a system or as individual generators.
- PC Remote Control Software can control ISS-7600 through USB interface connection.
- Supports 12 V / 24 V / 42 V systems
- 60 V / 50 A big volume Coupling Networks available
- Up to 200 A Power supply available.
- Electric shock-free safety plugs are used for every output terminal.
- Load resistors meeting the loading conditions (specified in Annex D of the standard) for the verification of the output characteristics optionally available.
- Equipped with a high accuracy current monitor. An oscilloscope allows measurement of the current waveform flowing into the DUT. Current and voltage waveforms can be examined at the same time with an oscilloscope because the current monitor output circuit is floating with respect to the SG and FG. The monitor's frequency response characteristic is from DC to 150 kHz.
- Japanese software is also available.



* Private standards or specifications by manufactures can be responded upon request.

Pulse 1 / 2a Generator ISS-7610

Pulse 1 : Simulation of transients due to supply disconnection from inductive loads. It is applicable to DUTs which, as used in the vehicle, remain connected directly in parallel with an inductive load.



Pulse 2a : Simulates transients due to sudden interruption of currents in a device connected in parallel with the DUT due to the inductance of the wiring harness





- Compliant tests to ISO 7637-2 (2011) Standard (Pulse1/Pulse2a generator)
- Stand-alone usage possible with 60V 30A CDN built-in.

Parameter	Specification (Pulse 1)	Specification (Pulse 2a)	Parameter	Q'ty
Output voltage (Us)	-5 V ~ -720 V (-1 V step)	5 V ~ 300 V (1V step)	Output cable (2 m)	Each 1 pc. of red & black color one
Output impedance (Ri)	10 Ω, 30 Ω, 50 Ω	2 Ω, 4 Ω, 10 Ω, 30 Ω, 50 Ω	DC input cable (2 m)	1 pc.
Pulse width (td)	50 μs, 200 μs, 300 μs, 500 μs, 1ms, 2ms	50 μs, 200 μs, 300 μs, 500 μs	Short lead for waveform verification	1 pc.
Rise time (tr)	1 μs : -0.5 μs /+0 μs 3 μs : -1.5 μs /+0 μs	1 μs : -0.5 μs /+0 μs	Interlock plug	1 pc.
Pulse repetition period (t1)	0.5s ~ 99.9s (0.1s step), P2a : 0.1s ~ 99.9s (0.1s step)		Fuse (3.15 A)	2 pcs.
DUT power capacity	DC 60 V / 30A		AC cable	1 pc.
Dimensions	(W)430 × (H)200 × (D)522 mm		Instruction manual	1 volume
Weight	Approx. 20 kg	Power consumption 260 VA		

Output waveform pulse1



pulse2a



ISS-7600 Series

Pulse 3a / 3b Generator
ISS-7630

Simulation of transients which occur as a result of the switching processes. The characteristics of these transients are influenced by distributed capacitance and inductance of the wiring harness.





- Compliant tests to ISO 7637-2 (2011) Standard (Pulse 3a/Pulse 3b generator)
- Stand-alone usage possible with 60V 30A CDN built-in.
- Frequency sweep (10 kHz - 100 kHz - 10 kHz) test possible (Option)
- Faster than 3.5ns rise time realized so as to conduct more severe test than the Standard.

Parameter	Specification
Output voltage (Us)	-20 V ~ -350 V (-1 Vstep) 20 V ~ 350 V (1 Vstep)
Output impedance (Ri)	50 Ω
Pulse width (td)	150ns ± 45ns
Rise time (tr)	5ns ± 1.5ns, <3.5ns
Pulse repetition period (t1)	10μs ~ 999μs (1μs step) *1 kHz ~ 100 kHz Frequency sweep possible (option necessary)
DUT power capacity	DC60V/30A
Dimensions	(W)430 × (H)200 × (D)522 mm
Weight	Approx. 17 kg Power consumption 110 VA



Parameter	Q'ty
Output cable (0.5m)	Each 1 pc. of red & black color one
DC input cable (2m)	1 pc.
BNC conversion adaptor	1 pc.
50Ω coaxial cable (BNC equipped)	1 pc.
G cable	1 pc.
Waveform verification lead	1 pc.
Interlock plug	1 pc.
Fuse (3.15A)	2 pcs.
AC cable	1 pc.
Instruction manual	1 volume

■ Output waveform

■ pulse3a (tr : set at <3.5ns)



■ pulse3b (tr : set at <3.5ns)



■ Difference of the impulse response among measurement probes


Since Pulse 3a / 3b contain high frequency components, the waveform measurement should be paid attention. It can be done easily with the optional attenuator.




BNC conversion adaptor for the measurement



Attenuator in No-load (Option)



Measurement with a 100:1



Measurement with the NoiseKen no-load attenuator

ISS-7600 Series

Pulse 2b / 4 Generator

BP4610

Pulse 2b : Simulates transients from DC motors acting as generators after the ignition is switched off.

Pulse 4 : Simulates supply voltage reduction caused by energizing the starter-motor circuits of internal combustion engines.



- Compliant tests to ISO 7637-2 (2011) Standard (Pulse 2b generator)
- Compliant to ISO 7637-2 (2004) Standard pulse 4 generator
- ± 60 V 10 A DC - 150 kHz bipolar amplifier built-in.
- Works as a power source replacing an external battery for testing with the other pulses.
- Expandable to be 15 A or 30 A upon addition of an optional external power supply.

* Requirement of 100 A / 200 A can be responded upon request.



* Optional software shall be necessary for putting Pulse 2b / 4 out.

Parameter	Specification	
Pulse 2b	UA, Us*	0 V ~ 60.0V ± 10% ± 0.5 V 0.1 V step
	Ri	0 Ω ~ 0.05 Ω
	Td	0.1s, 0.2s, 0.5s, 1s, 2s, 4s ±20%
	t12, tr, t6*	1ms, 2ms, 5ms ±50%
Pulse 4	UB	0 V ~ 60.0 V ± 10% ± 0.5 V 0.1 V step
	Us, Ua	0 V ~ -UB ± 10% ± 0.5 V -0.1 V step
	Ri	0Ω ~ 0.02 Ω (at shipment)
	t7, t8, t10, t11*	1ms ~ 999ms ± 10% 1ms step
	t9	0.1s ~ 99.9s ±1 0% 0.1s step
Dimensions	(W)430 × (H) 177 × (D)550 mm	
Weight	Approx. 26 kg Power consumption 1200 VA	



*Each parameter can be set individually.

Output Waveform

■ pulse2b

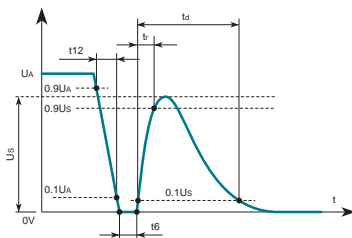

■ pulse4



Pulse 5a / 5b Generator

ISS-7650

Pulse 5a : Simulation of load dump transient, occurring in the event of a discharged battery being disconnected while the alternator is generating charging current and with other loads remaining on the alternator circuit at this moment.

Pulse 5b : Simulation of the above load dump transient when a Zener diode is inserted to the battery route.

- ISO 7637-2 (2004) compliant pulse 5a
- Pulse 5a and Pulse 5b generating unit
- A built-in 60 V / 30 A Coupling Network allows independent operation.
- Equipped with a programmable clip circuit that can produce Pulse 5b clipped waveform in steps of 0.1 V without externally attaching a zener diode.

*The ISO standard requires pulse 5a and 5b have the same value for their td. Due to the effects of the integrated clip circuit, pulse 5b width is different from that of pulse 5a. Pulse 5b non-compliant to ISO 16750 (2012) Test B





ISS-7600 Series

Parameter	Specification
Pulse5a	12 V system
Output voltage (Us)	20 V ~ 100 V (0.5 V step)
Output impedance (Ri)	0.5 Ω ~ 8 Ω (0.5 Ω step)
Pulse width (td)	40ms, 100ms ,200ms, 350ms ,400ms
Rise time (tr)	10ms (+0, -5ms)
Pulse5b	12 V system
Output voltage (Uss)	10 V ~ 40 V (0.1 V step)
Pulse width (td)	Td of pulse 5b is dependent on Us, Uss and Ri settings, the same value as pulse 5a td not available
DUT power capacity	DC 60 V / 30 A
Dimensions	(W)488 × (H)670 × (D)660 mm
Weight	Approx. 100 kg
	Power consumption 150 VA (in stand-by) / 600 VA (in charging)



Parameter	Q'ty
Output cable (2 m)	Each 1 pc. of red & black color one
DC input cable (2 m)	1 pc.
Coaxial cable for current monitoring	1 pc.
DC coupling switching plug	1 pc.
Short lead for waveform verification	1 pc.
Interlock plug	1 pc.
Fuse (6.3 A)	2 pcs.
AC cable	1 pc.
Instruction manual	1 volume

Output Waveform

pulse5a






pulse5b



pulse5c (Customized waveform)

* Responded upon the particular request. If required, please contact us.



*1ms - 500ms (1ms)

Coupling Network & System Rack ISS-7690 / ISS-7602

System rack that all pulse generating units can be mounted on (ISS-7602).
ISS-7690 Coupling Network unit centralizes all pulse outputs of the system-configured generators in the single output port.

- Software selectable pulse generators and DC supplies
- In addition to the built-in DC power supply (BP4610), two external power supplies (battery) connections are available
- Switches three independent power supplies (BP4610 (LINE 1), LINE 2, LINE 3)
- A high speed DC interruption switch with < 1μs fall time capability is standard built-in
- Equipped with a high accuracy current monitor.
- The pulse 3a and 3b waveforms meet the ISO standard specifications at the output ports of the Coupling Network Unit.



Insure high frequency Pulse 3a / 3b waveforms which may be dulled due to the wiring length with the centralized CDN output port.



Parameter	Specification
DUT power capacity	60 V / 50 A
DC input	2 channels (Amplifier power supply & battery) *Including Pulse 2b, Pulse 4 and arbitrary waveform.
Pulse input	Pulse1, Pulse2a/2b ,Pulse3a/3b ,Pulse4, Pulse5a, Pulse5b
Interruption test	≤ 1 μs (in DC interruption), Not switched in fluctuation of the interruption
Current monitor	Monitoring terminal (BNC)output 10m V/A (DC)150 kHz
System rack	(W)555 × (H)1800 × (D)790 mm

ISS-7600 Series

Control software **ISS -7601**

Comprehensive control software for the all pulse generators.

- Comprehensive control software for the all pulse generators.
- Enables to control the each pulse generator comprehensively.
- One touch output possible even in Pulse 2b and Pulse 4 whose waveforms assembly may be troublesome.
- Easy setting of the test conditions with its programming function.
- Reporting function available to realize the test conditions, comments as well as the result (Preview and print-out also possible).
- Sequence setting screen
- Preview screen for printing the test result out



Fast Pulse /Slow Pulse Generators

ISS-7630 / ISS-7610-N1229



The ISO 7637-3 2007 standard provides evaluation of the immunity of devices under test (DUTs) to transient transmission by coupling via lines other than supply lines. The test transient pulses simulate both fast and slow transient disturbances, such as those caused by the switching of inductive loads and relay contact bounce. Also it provides 3 kinds of the coupling methods.

ISS-7630 (Fast Pulse)	
Parameter	Specification
Output voltage (Us)	-20 V ~ -350 V (-1 V step) 20 V ~ 350 V (1 V step)
Output impedance (Ri)	50 Ω
Pulse width (td)	150ns ± 45ns
Rise time (tr)	5ns ± 1.5ns, < 3.5ns
Pulse repetition period (t1)	10 μs ~ 999 μs (1 μs step)
DUT power capacity	DC 60V / 30 A
Dimensions	(W)430 × (H)200 × (D)522 mm
Weight	Approx. 17 kg Power consumption 110VA



ISS-7610-N1229 (SLOW Pulse)	
Parameter	Specification
Output voltage (Us)	5 ~ 50 V (0.1 V step) -5 ~ -50 V (-0.1 V step)
Output impedance (Ri)	2 Ω
Pulse width (td)	50 μs ± 10 μs
Rise time (tr)	1 μs
Pulse repetition period (t1)	0.1 ~ 99.9s (0.1s step)
DUT power capacity	-
Dimensions	(W)430 × (H)200 × (D)522 mm
Weight	Approx. 20 kg Power consumption 50VA

Output Waveform


Fast Pulse a




Fast Pulse b



Slow Pulse +




Slow Pulse -




ISS-7600 Series

Test Setup (ISO 7637-3)



Capacitive coupling clamp (CCC) method (Only for Fast Pulse)

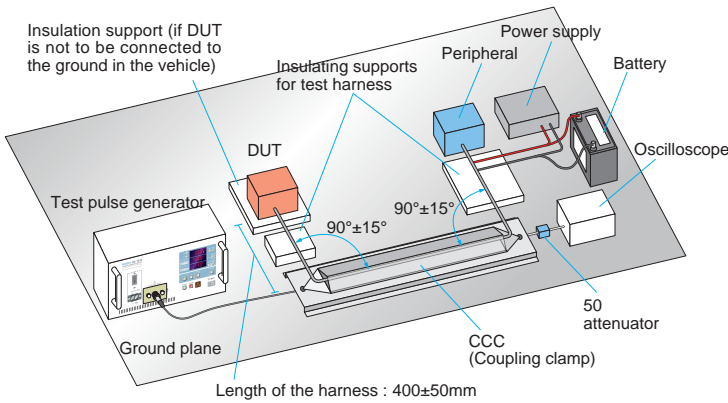

Inductive coupling clamp (ICC) method (Only for Slow Pulse)

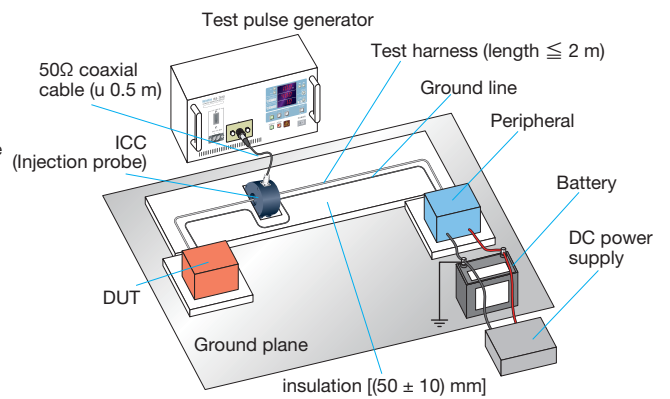

Direct capacitor coupling (DCC) method (For Fast Pulse and Slow Pulse)

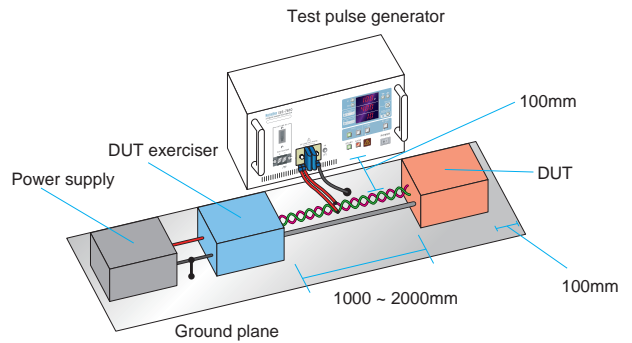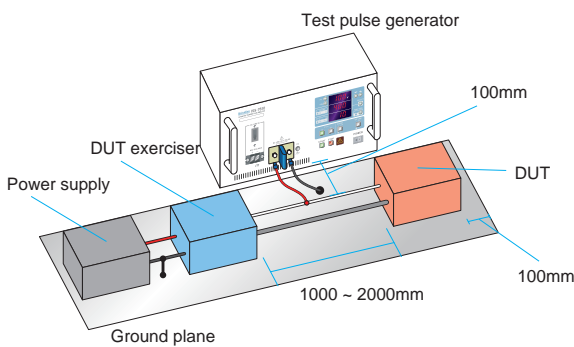

* DCC test setup for CAN bus.

Options

Coupling Clamp MODEL : ISS-7630-Cup



Coupling clamp for testing for lines other than supply lines. Capacitively couples 3a and 3b pulses into the lines under test.

Contents: Coupling clamp, BNC Coaxial cable 0.5m, BNC coaxial cable 0.1 m, 50Ω 5W terminator, Metal fasteners

● Compatible model : ISS-7630

Injection Probe MODEL : F-120-2



Clamp used for the Inductive coupling clamp (ICC) test method provided in ISO 7637-3 Standard. Calibration fixture (FCC-BCICF-1) is also available.

* The left photo is the figure including the calibration fixture.

DCC BOX



- Inject pulse noise into the I / O signal line through a 100pF coupling capacitor regulated by ISO 7637-3.
- With a check terminal to check the pulse
- The pulse decoupling inductor can be attached to and detached from the sample (hereinafter referred to as EUT1 and EUT2).
- Since the pulse generator to the DCC BOX is a balanced transmission line and the DCC BOX to EUT 1 and EUT 2 is an unbalanced transmission line, a balanced / unbalanced balun is built in to suppress disturbance of the pulse waveform.

Waveform Verification Attenuator under No Load Conditions Model: 00-00007A



The attenuator for observing high frequency and high voltage pulses of Test Pulse 3a / Test Pulse3b of ISS-7630.
2.5 kΩ 40 dB ATT (Pulse 3a / Pulse 3b)

● Compatible model: ISS-7630

Waveform Verification Set Model: 06-00059B



A set of resistor and attenuator for observing the pulse of Test Pulse 1 / Test Pulse 2a / Test Pulse 2b / Test Pulse 3a / Test Pulse 3b / Test Pulse 5a of ISS-7610, BP4610, ISS-7630, & ISS-7650.

1 Ω resistor, 2 Ω resistor, 10 Ω resistor, 50 Ω resistor, 2.5 kΩ 40 dB ATT, 50 Ω 20 dB ATT × 2

● Compatible models: ISS-7610, ISS-7630, ISS-7650

* Resistors can also be purchased individually.

50Ω Load Waveform Verification Attenuator Model: 00-00006B



The attenuator for observing high frequency and high voltage pulses of Test Pulse 3a / Test Pulse 3b of ISS-7630.
50 Ω 20 dB ATT × 2 (Pulse 3a / Pulse 3b)

● Compatible model: ISS-7630

JASO Standard Compliant Automotive Transient Surge Simulator

JSS-001


Simulator to reproduce various transient surge phenomena which are generated in a vehicle and required in JASO D001-94 General Rules of Environmental Testing Methods for Automotive Electronic Equipment established by The Society of Automotive Engineers of Japan Standard, and evaluate the immune resistibility of the equipped electronics devices against the surge.

- JASO D001-94 Standard compliant simulator
- Can be used for both 12 V and 24 V systems.
- One touch selection possible for the output surge waveform.




JSS-001

Output Waveforms



A-1 Waveform
τ:200ms
V:20V/Div
H:100ms/Div



B-1 Waveform
τ:60ms
V:20V/Div
H:20ms/Div

Specifications

Parameter	Specification (JSS-001)
Output voltage / RC Time constant / Output impedance / DC cut time	
Type A-1	100 V / 200ms / 0.8 Ω / -
Type A-2	150 V / 2.5μs / 0.4 Ω / -
Type B-1	-100 V / 60ms / 8 Ω / 300ms
Type B-2	-320 V / 2ms / 80 Ω / 10ms
Repetition frequency / number of pulses	30s / 1 ~ 999999
DUT power capacity	Max. DC 50 V / 10 A
Dimensions	(W)555 × (H)1500 × (D)790 mm
Weight	Approx. 160 kg

JASO D001-94

1. Conditions of Transient Voltage Test

Class	Type of test	Test conditions					Number of pulses	Location of transient voltage impression
		Vp (V)	τ (μs)	f (Hz)	R3 (Ω)			
12V system	Type A	A-1	70	200000	-	0.8	1	Power supply terminal
		A-2	110	2.5	0.4	10		
	Type B	B-1	-80	60000	1/30	8	100	
		B-2	-260	2000	80			
24V system	Type C	As agreed between the parties concerned					via agreement	Related Terminal
	Type D	D-1	110	400000	-	1.5	1	Power supply terminal
		D-2	170	2.5	0.9	10	100	
	Type E	-320	26000	1/30	210	100		
	Type F	As agreed between the parties concerned					via agreement	Related Terminal

2. Constants in the Generating Circuits for Type A and Type D Transient Voltage Tests

Type of test	Capacitor voltage (V)	ResistorR1	ResistorR2 (Ω)	ResistorR3 (Ω)	ResistorR4 (Ω)	Capacitor C (μF)	Remarks
Type A	A-1	88	5 (100)	1 (100)	4 (100)	80000	} Select the either combination
		70	To be determined along power supply capacity for the charging	2 (100)	0.8 (100)	∞	
	A-2	110	0.6 (200)	0.4 (150)	∞	4.7	
Type D	D-1	130	22 (100)	2 (100)	11 (100)	50000	} Select the either combination
		110	5.5 (100)	1.5 (100)	∞	73000	
	D-2	170	1.2 (100)	0.9 (100)	∞	2.2	

Remarks

1. Numbers in parenthesis are reference figures for resistor power rating. Unit: W
2 The specified values for resistors and capacitors shall be true values not designated values.

3. Constants in the Generating Circuits for Type B and Type E Transient Voltage Tests

Type of test	Capacitor voltage (V)	ResistorR1	ResistorR2 (Ω)	ResistorR3 (Ω)	ResistorR4 (Ω)	Capacitor C (μF)	Remarks
Type B	B-1	-100	50 (10)	10 (10)	40 (10)	2400	} Select the either combination
		-80	To be determined along power supply capacity for the charging	20 (10)	8 (10)	∞	
	B-2	-260	60 (5)	80 (5)	∞	33	
Type E	-457	27 (100)	300 (10)	700 (10)	1000	} Select the either combination	
	-320	13 (100)	210 (10)	∞	2000		

Remarks

1. Numbers in parenthesis are reference figures for resistor power rating. Unit: W
2 The specified values for resistors and capacitors shall be true values not designated values.
* See the original document for the Figures.

FORD Standard Transient Pulse Generator

ISS-T1321



Simulator to generate Transient Pulse as required in FORD's EMC standard (EMC-CS-2009) for surge test onto automotive electronic devices. The generation waveforms are Pulse A1 / A2-1 / A2-2 / C1 / C2 surges standardized as RI130 & CI220, and Waveform F fluctuation standardized as CI260.

Basic specifications



Parameter	Specification
DC Max Input Voltage	DC 13.5 V
DC Max Output Current	10 A · 50 A (depends on waveform selection)
DC Input Breaker	50 A
Test Timer	1 ~ 999S (memorizes last test settings for up to 3 months)
Switching Relay	KUP-1415-12 (by Potter & Brumfield) displays the relaying accumulation * replacement recommended after 100 hours.
Emergency Stop	Red colored mushroom shape type. (push-lock-turn-reset type) Pulse output stop / DC output stop.
Power supply	AC 100 V-AC 240 V ± 10 % 50 VA
Dimensions	Approx. W430 mm × D322 mm × H 200 mm (protrusion excluded)
Weight	Approx. 12 kg

Output waveform and Current value



Test item	Output waveform	Mode	Required injection time *1	Max output current	Output termina
RI130	A2-1	2	60s	*2	C, D terminals(BNC terminals)
		3			
	A2-2	2			
		3			
CI220	A1	1	120s	10	DC LINE OUT (C, D terminals are short circuited)
		2	20s		
	A2-1	1	20s		
		2			
		3			
	A2-2	2			
		3			
	C-1	2	50		
		3			
	C-2	2			
3					
CI260	Waveform F	-	60s	10	DC LINE OUT (C, D terminals are open)

*1 : Injection times are variable. *2: Direct connection to 15-N1583 coupling test fixture.



■ CI220 A1 MODE1





■ CI220 A2-1 MODE1



■ CI220 A2-1 MODE2





■ CI220 A2-1 MODE3





ISS-T1321



CI220 A2-2 MODE2





CI220 A2-2 MODE3





CI220 C1 MODE2





CI220 C1 MODE3





CI220 C2 MODE2



CI220 C2 MODE3



CI260 Waveform F



Test Fixture for FORD standard RI130/RI150

15-N1583

Harness injection fixture to perform RI130 / RI150 test required in FORD Standard EMC-CS-2009
(Allows to perform RI130 test in combination with ISS-T1321).



Test fixture overall appearance

Basic specifications



Connector	N Type (Female contact)
Source wire	AWG 14 copper wire (with cover)
Dimensions	(W)1306 × (H)72 × (D)152 mm (protrusions excluded)
Weight	Approx. 7.5 kg
Equipped cable	Connection cable to ISS-T1321 × 2 pcs.



Connection setup

[Test setup] RI130


* Please refer to the relevant Standard for more details.

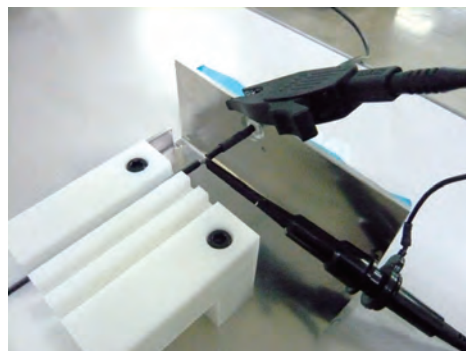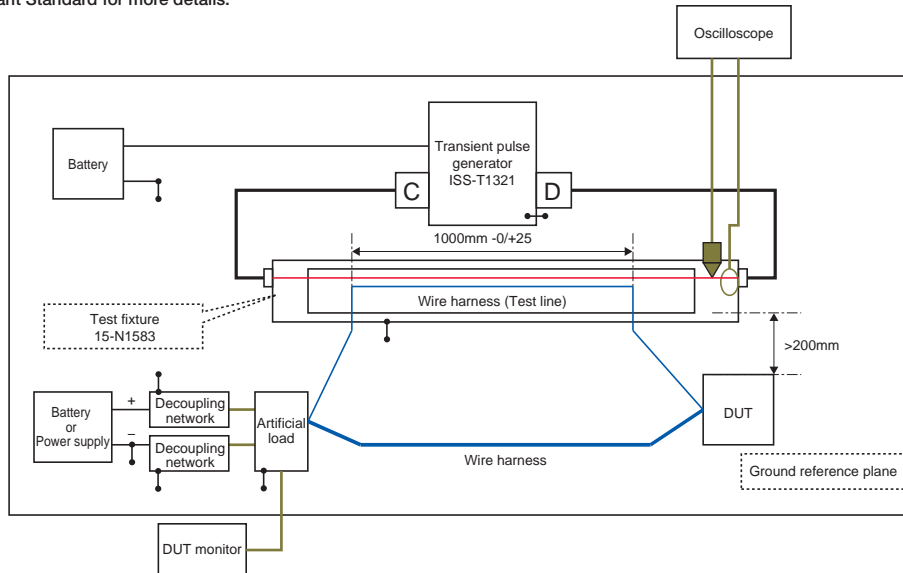


ISS-T1321

■ [Test setup] CI220


• Devices with a Single Power Supply Circuit

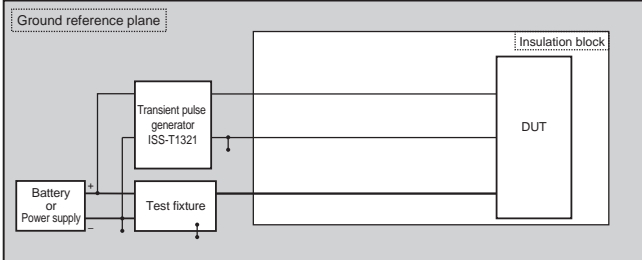

• Devices with Two Power Supply Connections

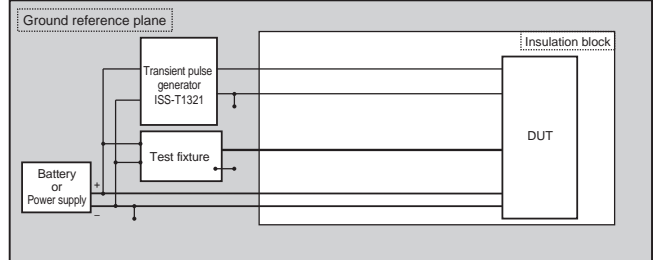

• Devices with Input Circuit

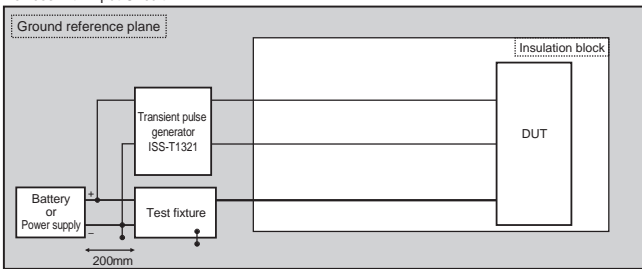

* Please refer to the relevant Standard for more details.

FORD Standard CI250 Transformer Unit 06-N1588


Ground offset transformer for conducting the CI250 test specified in the FORD standard "EMC-CS-2009".
The test is performed in combination with the DC voltage fluctuation test system (SG-7040A System).



Overall appearance

■ Basic specifications

Frequency Characteristics	30 Hz ~ 250 kHz
Input Signal	200 W max
Output Current	DC 50 A max
Coupling Ratio	4 : 1 (Input : Output)
Dimensions	Approx. (W)430 × (D)322 × (H)200 mm (protrusion excluded)

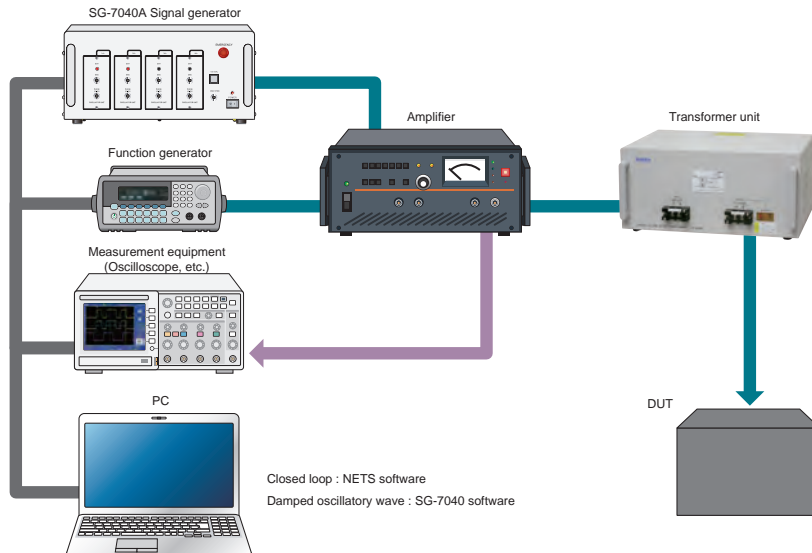

We can also offer testing and measuring instruments complying with other standards.

DC Power Supply Voltage Fluctuation Simulators

SG-7040A System

Simulator to reproduce power supply voltage fluctuation to electronics devices in a vehicle and evaluate the immune resistibility against the fluctuation.

Max. 4 channels not only +B connection but also ACC, IG (and IG2), etc. can be synchronized for the reproduction.


- ISO 16750 Standard compliant test (Possible to respond to private standards of the manufacturers).
- High resolution and high accuracy for the waveforms output realized with waveforms operation circuits built in the each channel.
- Easy and precise reproduction of the fluctuation phenomena not only in the Standard but also arbitrarily enabled with the software control (USB).
- Insures less than 1 μ s for the synchronizing variation among the channels.
- Enable to reproduce waveforms by using CSV data collected from real vehicle oscilloscope measurements.
- Automated testing operation can be customized for reducing the man-hour.

*Please contact us for the specification details.

*Load dump test A and B pulses not available



Specifications

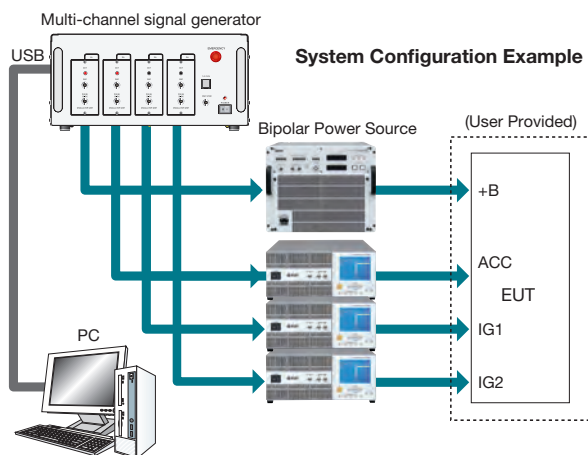

The system is primarily comprised of the following three elements: multi-channel signal generator, bipolar power source(s), and arbitrary waveform creation software.

Appropriate bipolar power sources shall be selected and the multi-channel signal generator shall be configured according to test requirements.

1. Multi-channel signal generator

- Modular construction for a maximum of four channels
- Arbitrary waveform creation (DC, ramp wave, sine wave, exponential wave, frequency modulation, amplitude modulation)
- Waveform sequence creation




2. Arbitrary Waveform Creation Software

The arbitrary waveform creation software easily creates complicated waveforms with repeated voltage and time ramping with its superb GUI.

3. Bipolar Power Source

High-speed bipolar power source is selected according to the DUT power rating.

Software

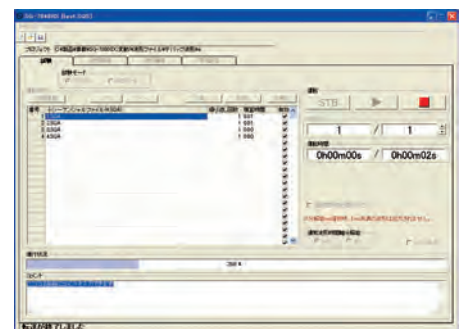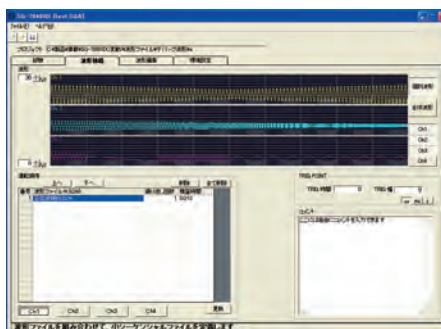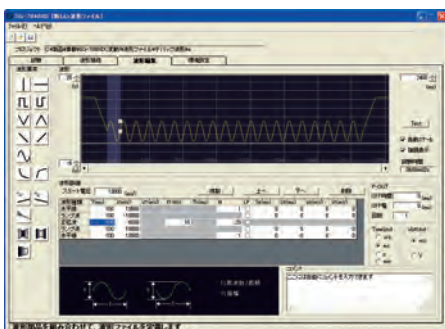


SG-7040A System

Multi-channel signal generator SG-7040A

Specifications

Parameter	Specifications / Functions
Channel Number	1 ch ~ 4 ch
Oscilloscope Trigger Output	BNC Connector 0 ~ 5 V Set the desired point as the trigger point with the waveform creation software and monitor waveform generation with the external trigger function of the oscilloscope.
Waveform Generator Method	Sampling waveform output based on partial waveform memory and DSP circuit output CSV data
Output Voltage	0.00 ~ ± 6.00 V
Output Current	5 mA Max.
Output Impedance	50 Ω
Setting Resolution	0.01 V
Output Resolution	1.221 mV
Offset Voltage	± 6.0 V
Frequency Response	150 kHz Max. (± 6.00 V Amplitude Sine Wave)
Characteristics	150 kHz Max. (± 6.00 V Square Sine Wave)
Frequency Precision	± 20ns + 50 ppm (over the entire frequency rang)
Waveform Rise / Fall Time	Less than 100ns (0±1.00V Swing)
Slew Rate	20 V / μs
Synchronization accuracy	Adjustable at a step of 1.0uS up to 10uS, to compensate differences in response time of the amplifiers connected. Synchronization with <1.0uS accuracy at the outputs of the bipolar power amplifiers connected.
Calibration Output	1 kHz 1V (Test Use)
PC Interface	USB 1.1
Operating Temperature	25°C ± 10°C
Operating Humidity	20 ~ 90% RH
Drive Power Source	Local AC supply voltage ±10% 50 / 60Hz 15 VA
External Dimensions	approx. (W)430 × (D)400 × (H)200 mm
Weight	approx. 10 kg

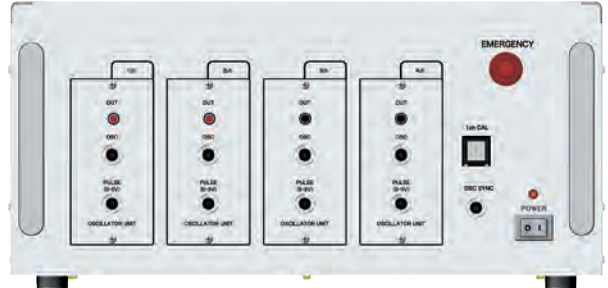



Accessories

Item	Q'ty
Coaxial cable (BNC-BNC/2m)	For number of channel
Output cable (1m)	For number of channel
Crimping terminal (M4)	For number of channel × 2 pcs.
Crimping terminal (M6)	For number of channel × 2 pcs.
Crimping terminal (M8)	For number of channel × 2 pcs.
Fuse (3.15A)	1 pc.
Application software	1 pc.
AC cable	1 pc.
USB cable	1 pc.
Instruction manuals (for main unit and software operation)	Each 1 volume
Accessories bag	1 pc.

DC Cut Module MODEL : SG-7044



Optional equipment for the SG-7040A Series to carry out supply interruption test with <math><1 \mu s</math> rise/fall time requirement.

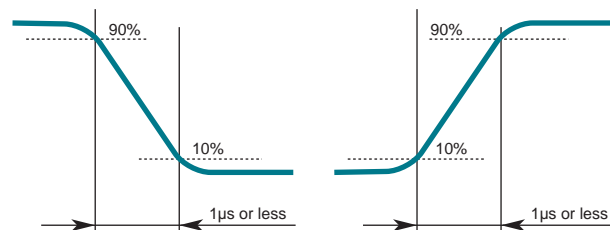

- Disconnects DC supply circuits
- Open and Sink Modes
- Rise and fall time <math><1 \mu s</math>
- Controllable from SG-7040A
- Sink currents up to -30 V
- DC 50 A

Specifications

Parameter	Specification
Output voltage	0 ~ DC 60 V
Steady-state current	Max. 50 A
Short mode	Open / Short (Current intake)
Cut off mode	Only + / Only - / Both polarities
Cut time	Open : Input terminal or trigger switch Short : Set at short duration or set at 2 - 9999 μs
Rise / Fall time	≤ 1 μs (10 % - 90 % short mode output open at DC 12V)
Dimensions / Weight	(W)430 × (D)400 × (H)200 mm / approx. 10 kg


Accessories

Item	Q'ty
Coaxial cable (BNC-BNC / 2 m)	1 pc.
Output cable (1m)	1 pc.
Crimping terminal (M4)	4 pcs.
Crimping terminal (M8)	4 pcs.
Fuse (2 A)	2 pcs.
AC cable	1 pc.
Instruction manuals	1 volume
Accessories bag	1 pc.

* In case the units are cabled in the rack, AC cable shall be connected inside of the rack.

SG-7040A System


Sweep Setting Function

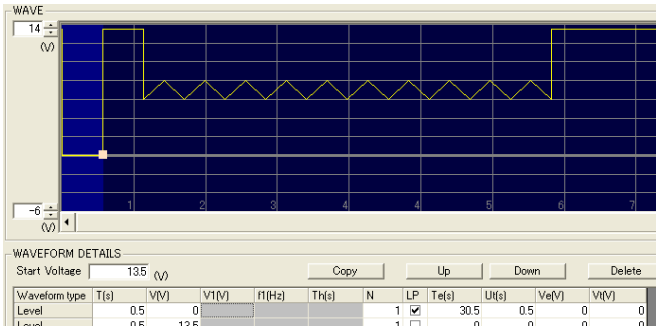

Easily and reliably creates a loop waveform using the sweep function detailed at left for a long test duration requiring varying T (times) and V (voltages).


- T (ε) = Start
- Te (ε) = Stop
- Ut (ε) = Step
- N = Loop Number
- LP = Loop Setting

Delay Set Function

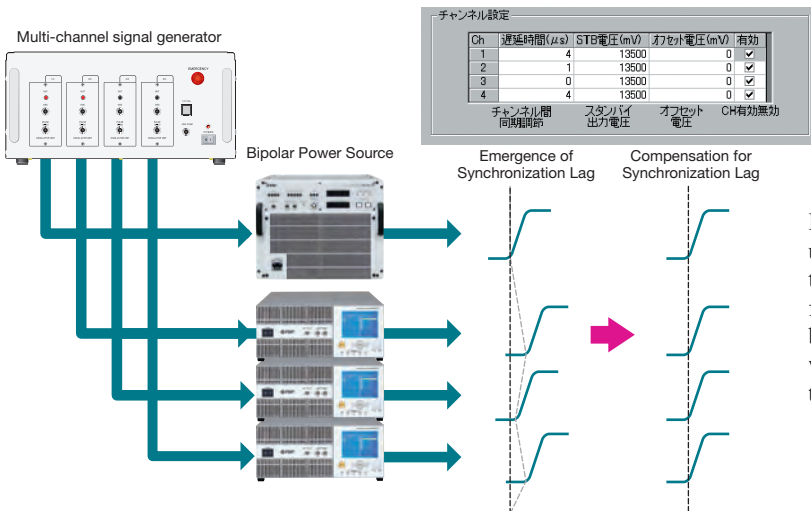


In multichannel tests it is important to ensure each individual channel is precisely synchronized. This system guarantees a synchronization delay of 1μs or less by compensating for output timing differences from the power amplifiers being connected, whereas other systems are not equipped with similar capability, which often leads to an erroneous test.

CSV Waveform EXCEL Operation Example

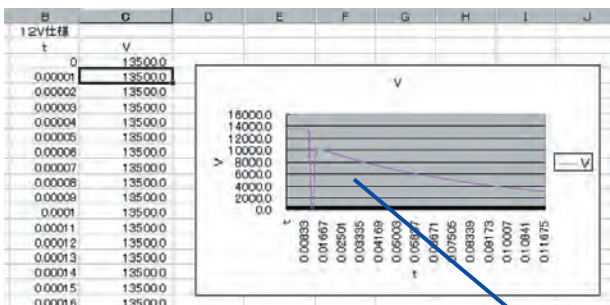


Imports non-standard test waveforms such as waveforms data collected in vehicle environments as CSV files, and generates these waveforms from the signal generator. Not available thus far with existing conventional equipment due to the limited memory capacity, the SG-7040A with 512 k words memory is a perfect solution to accurately perform complex voltage variations, fluctuations, dips and dropouts.

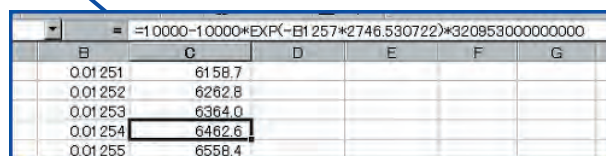


SG-7040A System

Automated Simulations

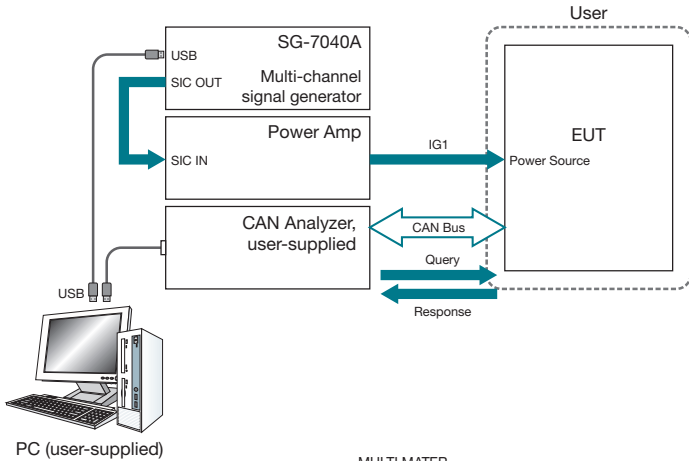


■ Example 1: CAN Communication Control

CAN is one of the most widely adopted system bus in automotive technology. Automated testing can be done by reading CAN communication protocols into the software and defining malfunction of the DUT.

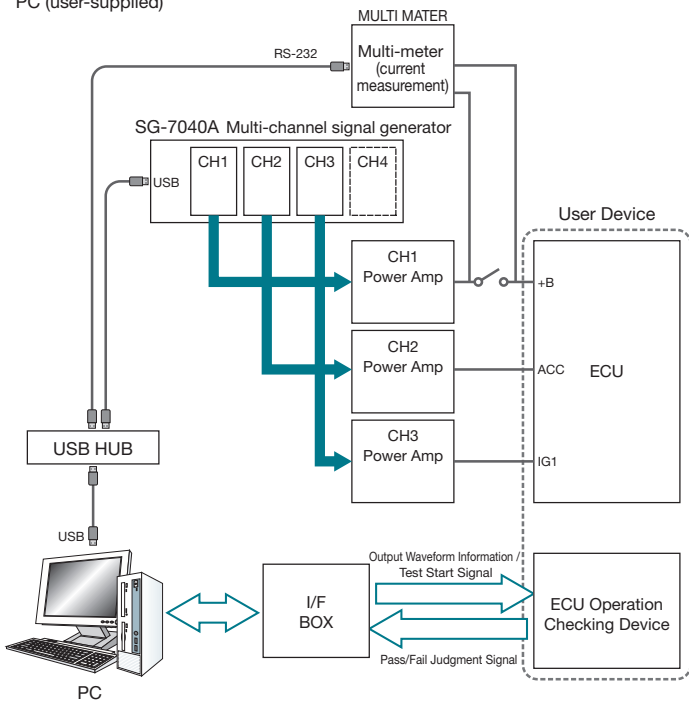

■ Example 2: "Dark Current" Measurement

Some automobile manufacturers implement "Dark Current" measurements. This system allows dark current measurements in conjunction with voltage fluctuation simulations.

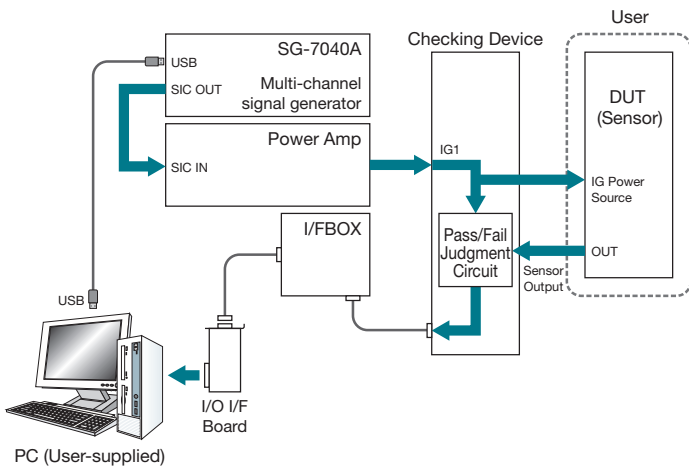


■ Example 3: Check Device

Automated testing by incorporating Pass/Fail judgment circuit with received signals from the DUT such as voltage, current, and frequency.

SG-7040A System

Regarding the Bipolar Power Source

Points to be considered for bipolar power source for automotive test applications

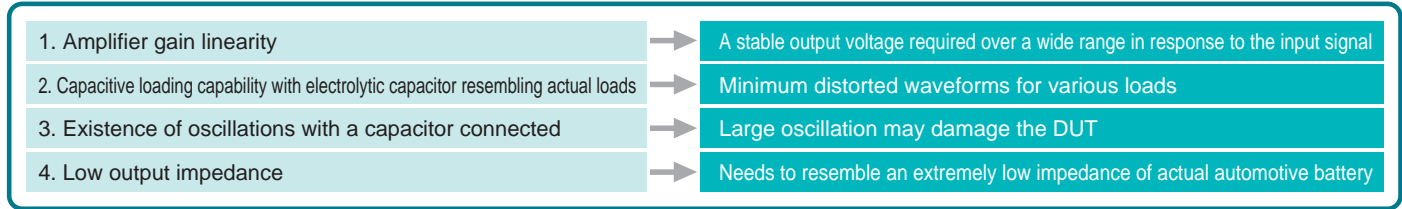

In order to meet the above requirements, NoiseKen recommends NF Corporation's bipolar power sources




AS-161 Series line-up


Model	Output voltage	Output Current		Frequency Characteristics
		peak current	DC	
As-161-30 / 60		±30 A	15 A	DC ~ 150 kHz
As-161-60 / 60	-15 V ~ +60 V	±60 A	30 A	
As-161-120 / 60		±120 A	60 A	DC ~ 100 kHz
As-161-60 / 30		±60 A	30 A	
As-161-120 / 30	-10 V ~ +30 V	±120 A	60 A	DC ~ 150 kHz
As-161-240 / 30		±240 A	120 A	

Competitive Comparison 1: Broadband Gain Characteristics

NF Corporation Model: As-161 Broadband Gain Characteristics (under no load conditions)

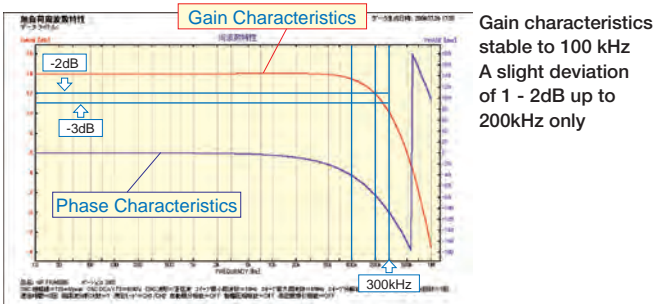

Company A: Broadband Band Gain Characteristics (under no load conditions)

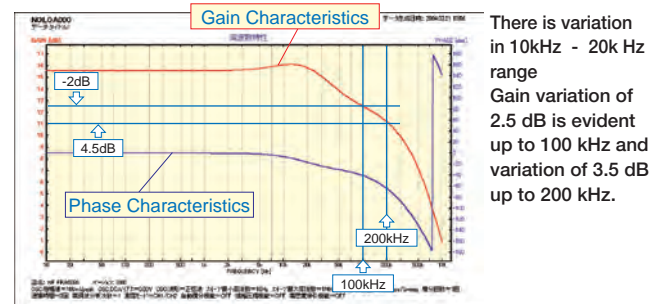


Obtaining gain linearity within the guaranteed frequencies prevents possible malfunctions other than from the intended simulations

Competitive Comparison 2: Impedance Characteristics


NF Corporation Model: As-161 Impedance Characteristics

Under 1 Ω value over a range beyond the 150 kHz specifications

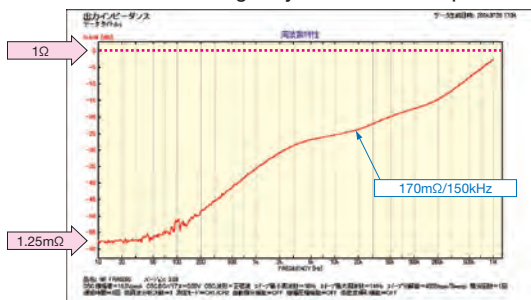

Company A: Impedance Characteristics

Characteristics of 1 Ω or less are only achievable at 3 kHz or less.

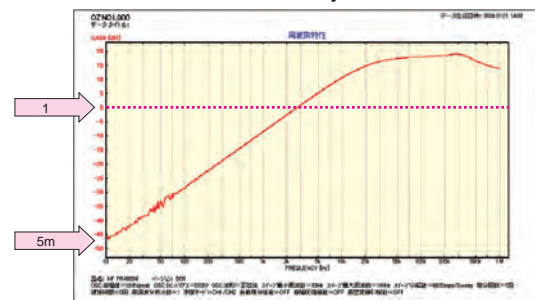

A bipolar power amplifier with value close to the battery's impedance characteristics (≈0 Ω) performs testing to best resemble vehicles.

NoiseKen

NOISE LABORATORY

NOISE LABORATORY CO., LTD.

<http://www.noiseken.com>

Global Sales & Marketing Section

1-4-4 Chiyoda, Chuo-ku, Sagamiara City, Kanagawa Pref. 252-0237 Japan

TEL: +81-(0)42-712-2051 FAX: +81-(0)42-712-2050

E-mail : sales@noiseken.com



[Note] ● It is prohibited to copy or reprint all or part of this catalog without permission. ● Product specifications and appearance are subject to change without notice. ● The model name and price may change or production may be discontinued due to various reasons. ● Please contact our sales office for any questions regarding your order or contract. ● We may not be liable for any responsibilities that arise without confirmation. ● Company names and brand names listed in the catalog are trademarks or registered trademarks. ● Our products listed in the catalog are commercial equipment and devices that are supposed to be used under the supervision of a supervisor who has sufficient knowledge in use. ● It is not a product designed and manufactured for general households and consumers. ● Due to printing reasons, there may be differences in color and texture between the photos listed in the catalog and the actual product. ● We make every effort to provide accurate information about the contents of the catalog, but if you notice any typographical errors, please contact our sales office.

Authorized representative